

GBP PRICES VALID FROM 1 APRIL 2023

GEBERIT SUPPLY SYSTEMS PRODUCT GUIDE AND PRICE LIST

**KNOW
HOW
INSTALLED**

Geberit Mapress Stainless Steel 7

Geberit Mapress Carbon Steel 115

Geberit Mapress Copper 173

Geberit Mapress CuNiFe 237

Geberit FlowFit 259

Geberit Mepla 333

Pipe Valve Fittings 389

Tools 411

Appendix 451

Swiss precision, spirit of innovation and art of engineering

Since the day it all began in 1874 in Switzerland, we have been defined by our experiences. Geberit has been among the pioneers of the industry and is still setting trends with comprehensive system solutions.

Those who use Geberit systems are playing safe. No uncertainties that can result when combining components from different manufacturers and no unnecessary material costs and installation workload. In addition, Geberit systems offer maximum reliability and economic viability, and cause a minimum of environmental impact.

Geberit Mapress Pressing Technology

Geberit Mapress is a metal pressing system that provides an efficient, safe, and reliable solution for a range of different job requirements. To ensure a safe and long lasting connection the fitting and pipe are pressed once the pipe has been inserted to the required insertion depth.

Reduce your down time and improve safety with Geberit Mapress

- The system can be fixed wet so no draining required
- Reduced flushing time due to a cleaner installation process
- No hot works and no cooling down period
- Unpressed joints leak during pressure test
- Coloured pressing indicators help identify the material and pressed fittings
- Protection end caps stop debris and dirt getting into the system

A little Know-how goes a long way

Geberit provide installer training at purpose built training academies in Warwick and Dublin – providing the Know-how for installers to feel confident in installing Geberit products.

At Geberit we have a dedicated technical support team on hand and ready to help. To contact us call 01926 516800 or email technical@geberit.co.uk

Geberit at your fingertips

Also available to you is the Geberit ProApp where you can get access to product specifications, installation instructions and videos. You can also identify any Geberit product simply by scanning its barcode



ProApp QR-Code for Apple App Store:




ProApp QR-Code for Google Play Store:



From beginning to end

With an in-depth range of products and systems, Geberit provides innovative solutions for water supply, use and drainage. Once installed, many Geberit products remain invisible to the end user. And they fulfil their function for many decades thanks to their high level of quality and reliability.

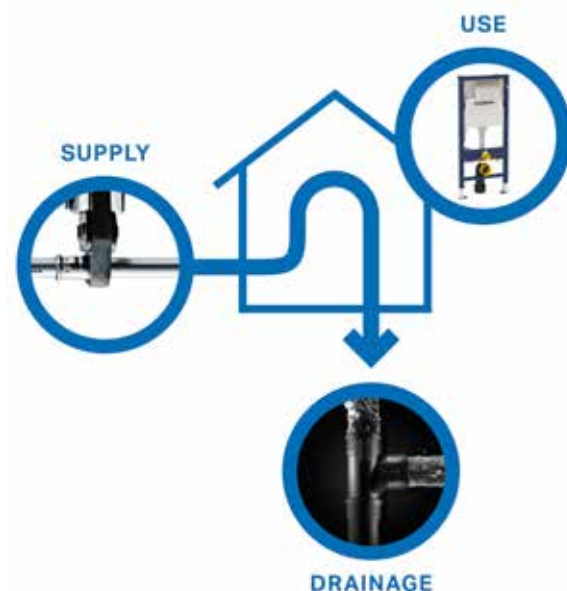





Geberit Mapress Stainless Steel

Preliminary Remarks	9
Application overview – Geberit Mapress Stainless Steel for liquid media	11
Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024	12
Application overview – Geberit Mapress Stainless Steel for gaseous media.	13
Geberit Mapress Stainless Steel	14
System pipes 1.4401	14
System pipes 1.4301	15
Pipe nipples	15
Couplings	16
Reducers.	17
Bends	18
T-pieces.	22
Adaptors, permanent.	25
Adaptors and connections, detachable.	32
Compensators	42
Feed-throughs	43
Sealings.	43
Connections	44
Geberit Mapress Stainless Steel, gas	47
System pipes 1.4401	47
Pipe nipples	48
Couplings	49
Reducers.	50
Bends	50
T-pieces.	54
Adaptors, permanent.	55
Adaptors and connections, detachable.	59
Sealings.	63
Connections	63

Geberit Mapress Stainless Steel, silicone-free	65
System pipes 1.4401	65
Couplings	65
Reducers	66
Bends	67
T-pieces	69
Adaptors, permanent	72
Adaptors and connections, detachable	74
Sealings	80
Connections	81
Compensators	82
Feed-throughs	82
Geberit Mapress Stainless Steel, FKM, blue	83
System pipes 1.4401	83
System pipes 1.4301	84
Pipe nipples	84
Couplings	85
Reducers	86
Bends	87
T-pieces	90
Adaptors, permanent	93
Adaptors and connections, detachable	96
Sealings	102
Feed-throughs	102
Accessories for Geberit Mapress Stainless Steel	103
Insulations for connectors	103
Caulks for pipes and fittings	103
Pipe fastenings	104
Connector fastenings	106
System seals	108
Sets of bolts for flange connections	112



Preliminary Remarks

Introduction to Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel is especially suited for potable water installations as well as for open and closed heating and cooling circuits. There are special fittings available for gas installations, as well as solar and industrial applications.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

In addition to the standard Geberit Mapress Stainless Steel product range, LABS free fittings are also available.

Benefits of Geberit Mapress Stainless Steel

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Protective caps ensure installation is clean from start to finish
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

High molybdenum content

High resistance to corrosion due to 2.2% minimum Molybdenum content compared to the industry standard of 2%

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress Stainless Steel fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Always check that you are using the correct tools

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress Stainless Steel for liquid media

Geberit Great Britain, Version: February 2023

Application purposes	Operating temperature	Maximum operating pressure	Pipes		
			CrNiMo steel 1.4401 / 316	CrMoTi steel 1.4521 / 444	CrNi steel 1.4301 / 304
For cold and hot potable water	0–100 °C	16 bar / 1600 kPa ³⁾	✓	✓	
For cooling and heating water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓	✓	✓
For cooling and heating water with antifreeze agent	-30 – +120 ° ¹⁾	16 bar / 1600 kPa	✓	✓	✓
For district heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓	✓	✓
For district heating water ≤ 140 °C	0–140 °C	16 bar / 1600 kPa	✓	✓	✓
For saturated steam ≤ 120 °C	0–120 °C	2 bar/200 kPa	✓		
For saturated steam ≤ 155 °C	0–155 °C	4.5 bar / 450 kPa	✓		
For service water and process water	0–100 °C	16 bar / 1600 kPa	✓	✓	
For treated water	0–100 °C	16 bar / 1600 kPa	✓ ⁵⁾	✓ ⁵⁾	
For rainwater with a pH value of > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓	
For grey and black water with pH value > 6.0	0–100 °C	16 bar / 1600 kPa	✓	✓	
For extinguishing water (wet)	0–100 °C	16 bar / 1600 kPa	✓		
For extinguishing water (wet/dry, dry)	0–100 °C	16 bar / 1600 kPa	✓		
For sprinklers (wet)	0–100 °C	16 / 10 bar ⁴⁾ 1600 / 1000 kPa	✓		
For sprinklers (wet/dry, dry)	0–100 °C	16 / 10 bar ⁴⁾ 1600 / 1000 kPa	✓		
For thermal media (solar)	-25 – +220 °C ^{2) 1)}	16 bar / 1600 kPa	✓	✓	✓
For mineral and lubricating oil	Upon request	Upon request	6)		
For motor fuels (e.g. diesel)	Upon request	Upon request	6)		
For chemicals and technical liquids	Upon request	Upon request	6)		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

²⁾ Lifetime with collector standstill: 200 h/a at 180 °C; 60 h/a at 200 °C; total 500 h/lifetime at 220 °C

³⁾ 10 bar / 1000 kPa for MasterFix and MeplaFix

⁴⁾ 16 bar / 1600 kPa for d22–76.1 mm, 10 bar / 1000 kPa for d88.9–108 mm

⁵⁾ Application range according to TI "Treated Waters"

⁶⁾ Following Geberit approval

⁷⁾ Only use fittings with union nuts made of CrNi steel



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.



	Fittings		Seal rings				Flat gaskets for screw connections			Flange gaskets	
	CrNiMo steel 1.4401 / 316	Gunmetal	CIIR, black	FKM, blue	FKM, white	FPM, red	EPDM, black	FPM, green	Centellen® R WS 3825	Centellen® HD WS 3822	
	✓	✓	✓				✓			✓	
	✓	✓	✓ ¹⁾				✓ ¹⁾			✓	
	✓	✓	✓ ¹⁾						✓ ⁷⁾	✓	
	✓	✓	✓ ¹⁾					✓	✓ ⁷⁾	✓	
	✓	✓		✓ ¹⁾					✓ ⁷⁾	✓	
	✓		✓ ¹⁾						✓ ⁷⁾	✓	
	✓				✓ ¹⁾				✓ ⁷⁾	✓	
	✓		6)				6)			6)	
	✓ ⁵⁾		✓ ⁵⁾				✓ ⁵⁾			✓ ⁵⁾	
	✓		✓				✓			✓	
	✓		✓				✓			✓	
	✓		✓				✓			✓	
	✓			✓		✓		✓		✓	
	✓	✓		✓				✓	✓ ⁷⁾	✓	
	6)			6)				6)	6)	6)	
	6)			6)				6)	6)	6)	
	6)		6)	6)			6)	6)	6)	6)	

Application overview – Geberit Mapress Stainless Steel for gaseous media

Geberit Great Britain, Version: February 2023

Application purposes	Operating temperature	Maximum operating pressure	Pipes	
			CrNiMo steel 1.4401 / 316	CrNi steel 1.4301 / 304
For compressed air (oil purity class 0–3)	0–100 °C	25/16/12 bar	✓ ³⁾	✓ ³⁾
		2500/1600/1200 kPa		
For compressed air (oil purity class 0–X)	0–100 °C	25/16/12 bar	✓ ³⁾	✓ ³⁾
		2500/1600/1200 kPa		
For negative pressure ¹⁾	0–100 °C	Abs. ≥ 0,2 bar/20 kPa	✓	4)
For inert gases (e.g. nitrogen)	0–100 °C	25/16/12 bar	✓ ³⁾	✓ ³⁾
		2500/1600/1200 kPa		
For industrial gases (e.g. acetylene, shielding gases)	Upon request	Upon request	4)	
For natural gases	-20 – +70 °C	MOP 5/malleable cast iron 5 ²⁾	✓	
For liquefied gases	-20 – +70 °C	MOP 5/malleable cast iron 5 ²⁾	✓	
For biogases	Upon request	Upon request	4)	

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

²⁾ Malleable cast iron 0.1 if thread > 2"

³⁾ 25 bar / 2500 kPa for d12–54 mm (d35–54mm only with pressing collars), 16 bar / 1600 kPa for d76.1 mm, 12 bar / 1200 kPa für d88.9–108 mm

⁴⁾ Following Geberit approval

⁵⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024

Geberit Great Britain, Version: February 2023

		arc/angle (°)	DN	d, ø	L	H	Z
Geberit Mapress Stainless Steel bend	30102	90 °	12	15 mm	3.8 cm		1.8 cm
	30104	90 °	20	22 mm	4.7 cm		2.6 cm
Geberit Mapress Stainless Steel bend (silicone-free)	80104	90 °	20	22 mm	4.7 cm		2.6 cm
	80102	90 °	12	15 mm	3.8 cm		1.8 cm
Geberit Mapress Stainless Steel bend (FKM, blue)	50284	90 °	20	22 mm	4.7 cm		2.6 cm
	50282	90 °	12	15 mm	3.8 cm		1.8 cm
Geberit Mapress Stainless Steel bend (gas)	34000	90 °	12	15 mm	3.8 cm		1.8 cm
	34002	90 °	20	22 mm	4.7 cm		2.6 cm
Geberit Mapress Stainless Steel bend with plain end	30302	90 °	12	15 mm	3.8 cm	4.8 cm	1.8 cm
	30303	90 °	15	18 mm	4.2 cm	5.2 cm	2.2 cm
Geberit Mapress Stainless Steel bend with plain end (silicone-free)	30304	90 °	20	22 mm	4.7 cm	5.8 cm	2.6 cm
	80304	90 °	20	22 mm	4.7 cm	5.8 cm	2.6 cm
Geberit Mapress Stainless Steel bend with plain end (FKM, blue)	80303	90 °	15	18 mm	4.2 cm	5.2 cm	2.2 cm
	80302	90 °	12	15 mm	3.8 cm	4.8 cm	1.8 cm
Geberit Mapress Stainless Steel bend with plain end (gas)	50312	90 °	12	15 mm	3.8 cm	4.8 cm	1.8 cm
	50313	90 °	15	18 mm	4.2 cm	5.2 cm	2.2 cm
Geberit Mapress Stainless Steel bend with plain end (gas)	50314	90 °	20	22 mm	4.7 cm	5.8 cm	2.6 cm
	34007	90 °	12	15 mm	3.8 cm	4.8 cm	1.8 cm
Geberit Mapress Stainless Steel bend with plain end (gas)	34008	90 °	15	18 mm	4.2 cm	5.2 cm	2.2 cm
	34009	90 °	20	22 mm	4.7 cm	5.8 cm	2.6 cm



- Between April 2023 and April 2024, the dimensions of the articles listed above will be modified in accordance with the table. These articles with the new dimensions will then feature an additional X on the label




	Fittings	Seal rings			Flat gaskets for screw connections			Flange gaskets
	CrNiMo steel 1.4401 / 316	CIIR, black	FKM, blue	HNBR, yellow	EPDM, black	FPM, green	Centellen® HD WS 3822	Centellen® HD WS 3822
	✓	✓ ⁵⁾			✓ ⁵⁾			✓
	✓		✓ ⁵⁾			✓ ⁵⁾		✓
	✓	✓						✓
	✓	✓			✓			✓
	4)	4)						4)
	✓			✓			✓	✓
	✓			✓			✓	✓
	4)			4)			4)	4)

Geberit Mapress Stainless Steel

System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo

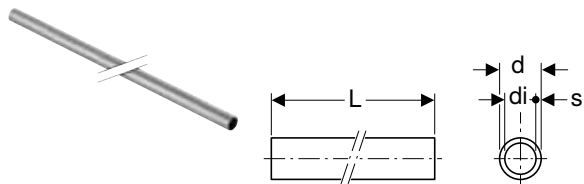

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
39002	12	15	13	1	6	840	120		13.73
39003	15	18	16	1	6	420	60		16.20
39004	20	22	19.6	1.2	6	420	60		21.91
39005	25	28	25.6	1.2	6	180	60		27.01
39006	32	35	32	1.5	6	180	30		39.80
39007	40	42	39	1.5	6	180	30		48.94
39008	50	54	51	1.5	6	180	30		62.29
39009	65	76.1	72.1	2	6	144		6	126.23
39010	80	88.9	84.9	2	6	96		6	143.82
39011	100	108	104	2	6	78		6	173.21


Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429



System pipes 1.4301

Geberit Mapress Stainless Steel system pipe CrNi

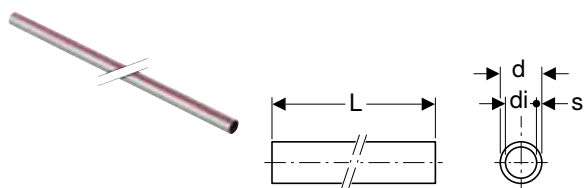

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.016 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
39102	12	15	13	1	6	840	120		11.60
39103	15	18	16	1	6	420	60		13.79
39104	20	22	19.6	1.2	6	420	60		18.54
39105	25	28	25.6	1.2	6	420	60		22.87
39106	32	35	32	1.5	6	180	30		34.09
39107	40	42	39	1.5	6	180	30		41.83
39108	50	54	51	1.5	6	180	30		52.80
39609	65	76.1	73.1	1.5	6	144		6	70.10
39610	80	88.9	85.9	1.5	6	96		6	80.26
39611	100	108	104	2	6	78		6	96.47

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Pipe nipples

Geberit Mapress Stainless Steel pipe nipple



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	3.98
32051	15	18	16	1	5	5	1	4.31
32052	20	22	19.6	1.2	5.2	5	1	4.60
32053	25	28	25.6	1.2	5.6	5	1	5.87
32054	32	35	32	1.5	6.2		1	7.53
32055	40	42	39	1.5	8		1	10.67
32056	50	54	51	1.5	9		1	13.83
32057	65	76.1	72.1	2	13.6		1	56.98
32058	80	88.9	84.9	2	15		1	66.43
32059	100	108	104	2	18		1	92.98

Couplings

Geberit Mapress Stainless Steel coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33001	10	12	4.2	0.8		100	10		9.48
32002	12	15	4.8	0.8	12800	200	20		7.72
32003	15	18	4.8	0.8		200	20		8.32
32004	20	22	5	0.8		200	20		9.72
32005	25	28	5.4	0.8	4000	100	20		11.04
32006	32	35	6.2	1	3200	100	5		13.63
32007	40	42	7.1	1.1	1440	48	4		18.65
32008	50	54	8.3	1.3	768	48	4		22.33
32009	65	76.1	12.7	2.1	320	20		1	110.65
32010	80	88.9	14.5	2.5	320	10		1	126.43
32011	100	108	17.6	2.6	160	10		1	160.65

Geberit Mapress Stainless Steel slip coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32102	12	15	2.5	8	3		50	10		12.92
32103	15	18	2.5	8	3		50	10		13.40
32104	20	22	2.5	8.4	3.4	4800	50	10		15.27
32105	25	28	3	9.1	3.1	2500	50	10		17.70
32106	32	35	3	10.2	4.2		50	5		19.76
32107	40	42	4	12	4		48	4		23.00
32108	50	54	4	14	6		40	4		29.38
32109	65	76.1	6	23	11		5		1	163.37
32110	80	88.9	7	26	12	160	5		1	184.46
32111	100	108	8	31	15	80	5		1	221.28



Reducers

Geberit Mapress Stainless Steel reducer with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33002	12 / 10	15	12	5.1	3.4		25	5		9.89
33003	15 / 10	18	12	5.3	3.6			5	1	10.10
32303	15 / 12	18	15	5.5	3.5		200	20		10.10
33004	20 / 10	22	12	6	4.3				1	9.43
32305	20 / 12	22	15	5.9	3.9		100	20		9.43
32306	20 / 15	22	18	5.7	3.7	9600	200	20		9.43
32307	25 / 12	28	15	6.6	4.6		50	10		10.76
32308	25 / 15	28	18	6.4	4.4		50	10		10.76
32309	25 / 20	28	22	6	3.9		200	20		10.76
32310	32 / 12	35	15	7.5	5.5		25	5		18.20
32311	32 / 15	35	18	7.4	5.4		25	5		18.20
32312	32 / 20	35	22	7.1	5		50	5		18.20
32313	32 / 25	35	28	6.8	4.5	3200	100	5		18.20
32314	40 / 12	42	15	8.1	6.1			5	1	33.13
32315	40 / 15	42	18	8	6			5	1	33.13
32316	40 / 20	42	22	8.2	6.1		24	4		33.13
32317	40 / 25	42	28	8.3	6		48	4		33.13
32318	40 / 32	42	35	7.7	5.1		48	4		33.13
32319	50 / 12	54	15	9.7	7.7		5		1	46.36
32320	50 / 15	54	18	9.6	7.6			5	1	46.36
32321	50 / 20	54	22	9.5	7.4		24	4		46.36
32322	50 / 25	54	28	11	8.7		48	4		46.36
32323	50 / 32	54	35	10.6	8		48	4		46.36
32324	50 / 40	54	42	9.2	6.2	1536	48	4		46.36
32331	65 / 50	76.1	54	14.6	11.1	400	25		1	99.39
32338	80 / 50	88.9	54	16.2	12.8	320	20		1	106.06
32339	80 / 65	88.9	76.1	16.1	10.8	320	20		1	106.06
32345	100 / 50	108	54	17.2	13.7		5		1	115.94
32346	100 / 65	108	76.1	18.4	13.1		5		1	115.94
32348	100 / 80	108	88.9	20.3	14.3	160	5		1	115.94



- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2022 to April 2023' overview

Bends

Geberit Mapress Stainless Steel bend

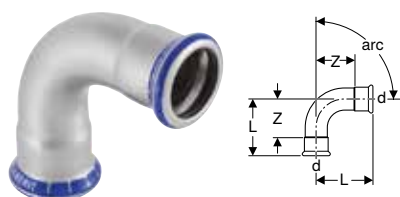

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°									
36101	12	15	3	1				1	11.56
36103	20	22	3.2	1.1			5	1	15.72
36104	25	28	3.6	1.3			5	1	19.86
36105	32	35	3.2	0.6			5	1	30.65
36106	40	42	3.7	0.7			5	1	48.03
36107	50	54	4.4	0.9			5	1	66.24
36108	65	76.1	7.5	2.2		5		1	165.67
36109	80	88.9	8.5	2.5				1	208.09
36110	100	108	10.3	2.8				1	284.51
arc / angle: 30°									
36121	12	15	3.3	1.3				1	11.56
36123	20	22	3.7	1.6		25	5		15.72
36124	25	28	4.1	1.8		25	5		19.86
36125	32	35	3.7	1.1		25		1	30.65
36126	40	42	4.4	1.4		25		1	48.03
36127	50	54	5.2	1.7		25		1	66.24
36128	65	76.1	8.8	3.5		5		1	165.67
36129	80	88.9	10.1	4.1		5		1	208.09
36130	100	108	12.2	4.7		5		1	284.51
arc / angle: 45°									
30602	12	15	2.8	0.8		200	20		11.56
30603	15	18	2.9	0.9	8000	200	20		12.93
30604	20	22	3.2	1.1	4800	100	20		15.72
30605	25	28	3.7	1.4		100	10		19.86
32606	32	35	4.3	1.7	3200	100	5		30.65
32607	40	42	5.1	2.1	1536	48	4		48.03
32608	50	54	6.2	2.7	800	50	2		66.24
32609	65	76.1	10.3	5	320	10		1	165.67
32610	80	88.9	11.7	5.7	160	5		1	208.09
32611	100	108	14.3	6.8	80	5		1	284.51
arc / angle: 60°									
36161	12	15	4	2				1	11.56
36163	20	22	4.7	2.6			5	1	15.72
36164	25	28	5.4	3.1				1	19.86
36165	32	35	5	2.4				1	30.65
36166	40	42	5.9	2.9				1	48.03
36167	50	54	7.2	3.7			5	1	66.24
36168	65	76.1	11.7	6.4				1	165.67
36169	80	88.9	13.6	7.6				1	208.09
36170	100	108	16.6	9.1				1	284.51
arc / angle: 90°									
30102	12	15	4.9	2.9	8000	200	20		11.56
30103	15	18	5.3	3.3	6400	100	20		12.93
30104	20	22	6.1	4	4000	100	20		15.72
30105	25	28	5.7	3.4	2400	100	10		19.86
31106	32	35	6.8	4.2	1500	50	5		30.65
31107	40	42	8	5	800	50	2		48.03
31108	50	54	10	6.5	480	30	2		66.24
31109	65	76.1	15.9	10.6	160	10		1	165.67
31110	80	88.9	18.5	12.5	120	10		1	208.09
31111	100	108	23	15.5	60	5		1	284.51



- Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview



Geberit Mapress Stainless Steel bend with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
36111	12	15	3	4	1				1	11.56
36113	20	22	3.3	4.1	1.2			5	1	15.72
36114	25	28	3.6	4.3	1.3			5	1	19.86
36115	32	35	3.2	4.1	0.6				1	30.65
36116	40	42	3.7	4.7	0.7				1	48.03
36117	50	54	4.4	5.5	0.9				1	66.24
36118	65	76.1	7.5	8.4	2.2				1	165.67
36119	80	88.9	8.5	9.5	2.5				1	208.09
36120	100	108	10.3	11.7	2.8				1	284.51
arc / angle: 30°										
36131	12	15	3.3	4.3	1.3			5	1	11.56
36133	20	22	3.7	4.6	1.6			5	1	15.72
36134	25	28	4.1	4.8	1.8			5	1	19.86
36135	32	35	3.7	4.6	1.1			5	1	30.65
36136	40	42	4.4	5.4	1.4			5	1	48.03
36137	50	54	5.2	6.3	1.7			5	1	66.24
36138	65	76.1	8.8	9.7	3.5				1	165.67
36139	80	88.9	10.1	11.1	4.1				1	208.09
36140	100	108	12.2	13.6	4.7				1	284.51
arc / angle: 45°										
30702	12	15	2.8	3.6	0.8	9600	200	20		11.56
30703	15	18	2.9	3.6	0.9	8000	200	20		12.93
30704	20	22	3.2	3.9	1.1		100	20		15.72
30705	25	28	3.7	4.4	1.4	4000	100	10		19.86
32706	32	35	4.3	5	1.7	3200	100	5		30.65
32707	40	42	5.1	5.9	2.1		48	4		48.03
32708	50	54	6.2	7	2.7	960	24	2		66.24
32709	65	76.1	10.3	11.1	5		5		1	165.67
32710	80	88.9	11.7	12.8	5.7		5		1	208.09
32711	100	108	14.3	15.8	6.8	80	5		1	284.51
arc / angle: 60°										
36171	12	15	4	5	2			5	1	11.56
36173	20	22	4.7	5.6	2.6			5	1	15.72
36174	25	28	5.4	6.1	3.1			5	1	19.86
36175	32	35	5	5.9	2.4			5	1	30.65
36176	40	42	5.9	6.9	2.9			5	1	48.03
36177	50	54	7.2	8.3	3.7			5	1	66.24
36178	65	76.1	11.7	12.6	6.4				1	165.67
36179	80	88.9	13.6	14.6	7.6				1	208.09
36180	100	108	16.6	18	9.1				1	284.51
arc / angle: 90°										
30302	12	15	4.9	5.9	2.9	8000	200	20		11.56
30303	15	18	5.3	6.1	3.3	8000	200	20		12.93
30304	20	22	6.1	7	4	4000	100	20		15.72
30305	25	28	5.7	6.3	3.4	3200	100	10		19.86
33306	32	35	6.8	7.4	4.2	2000	50	5		30.65
33307	40	42	8	8.8	5	1200	50	2		48.03
33308	50	54	10	10.8	6.5	480	30	2		66.24
33309	65	76.1	15.9	16.7	10.6	250	5		1	165.67
33310	80	88.9	18.5	19.5	12.5	160	5		1	208.09
33311	100	108	23	24.1	15.5	60	5		1	284.51



- Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview

Geberit Mapress Stainless Steel bend with plain ends



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
30892	12	15	4	11	0	7				1	13.76
30893	15	18	4	11.2	0	7.1				1	14.05
30894	20	22	4.1	11.4	0	7.3				1	14.87
30905	25	28	4.3	11.9	0	7.6			5	1	15.41
30906	32	35	4.1	11.8	0	7.7				1	32.29
30907	40	42	4.7	13.7	0	9				1	39.74
30908	50	54	5.5	14.9	0	9.4				1	49.70
30009	65	76.1	8.4	20.4	0	12				1	155.70
30010	80	88.9	9.5	22	0	12.5				1	175.60
30011	100	108	11.7	25.4	0	13.7				1	210.39
arc / angle: 30°											
30932	12	15	4.3	11.3	0	7				1	13.76
30933	15	18	4.4	11.6	0	7.1				1	14.05
30934	20	22	4.6	11.8	0	7.2			5	1	14.87
30935	25	28	4.8	12.4	0	7.6			5	1	15.41
30936	32	35	4.6	12.3	0	7.7				1	32.29
30937	40	42	5.4	14.4	0	9				1	39.74
30938	50	54	6.3	15.7	0	9.4				1	49.70
30029	65	76.1	9.7	21.7	0	12				1	155.70
30030	80	88.9	11.1	23.6	0	12.5				1	175.60
30031	100	108	13.6	27.3	0	13.7				1	210.39
arc / angle: 45°											
30872	12	15	4.5	11.6	0	7.1			5	1	13.76
30873	15	18	4.2	11.7	0	7.5				1	14.05
30874	20	22	4.2	12.3	0	7.1				1	14.87
30875	25	28	5.6	13.1	0	7.5				1	15.41
30876	32	35	5.3	12.9	0	7.6				1	32.29
30877	40	42	6.1	15.1	0	9				1	39.74
30878	50	54	7.3	16.7	0	9.4				1	49.70
30049	65	76.1	11.1	23	0	11.9				1	155.70
30050	80	88.9	13	25.2	0	12.2				1	175.60
30051	100	108	15.7	29.4	0	13.7				1	210.39
arc / angle: 60°											
30942	12	15	5	12	0	7				1	13.76
30943	15	18	5.3	12.4	0	7.1				1	14.05
30944	20	22	5.6	12.8	0	7.2				1	14.87
30955	25	28	6.1	13.7	0	7.6				1	15.41
30956	32	35	5.9	13.6	0	7.7				1	32.29
30957	40	42	6.9	15.9	0	9				1	39.74
30958	50	54	8.3	17.7	0	9.4				1	49.70
30069	65	76.1	12.6	24.6	0	12				1	155.70
30070	80	88.9	14.6	27.1	0	12.5				1	175.60
30071	100	108	18	31.7	0	13.7				1	210.39
arc / angle: 90°											
30402	12	15	5.9	12.9	0	7	5600	50	10		13.76
30403	15	18	6.1	13.3	0	7.2		50	10		14.05
30404	20	22	7	14.2	0	7.2		50	10		14.87
30405	25	28	7.9	15.5	0	7.6		50	10		15.41
30406	32	35	7.7	15.4	0	7.7			5	1	32.29
30407	40	42	9	18	0	9			5	1	39.74
30408	50	54	11.1	20.5	0	9.4			5	1	49.70
30089	65	76.1	16.6	28.6	0	12				1	155.70
30090	80	88.9	19.4	31.9	0	12.5				1	175.60
30091	100	108	24	37.7	0	13.7				1	210.39



Geberit Mapress Stainless Steel bend 90°, long



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.
30414	20	22	7	84	1.5	77	1	41.96
30415	25	28	8	85	1.7	77	1	44.96

Geberit Mapress Stainless Steel pipe bridge

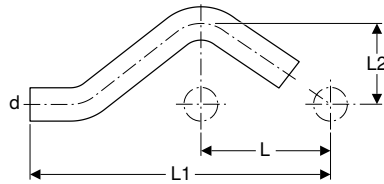

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	6	16.5	3.2	25	5		11.85
30803	15	18	6	16.6	3.3	25	5		12.26
30804	20	22	6	16.8	3.5	25	5		13.91
30805	25	28	6	17.9	3.8			1	16.88

T-pieces

Geberit Mapress Stainless Steel T-piece, equal



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33008	10	12	5.6	3.5	2.8	1.1	1.8		50	10		17.07
31002	12	15	6.4	3.9	3.2	1.2	1.9	6000	200	20		17.99
31003	15	18	6.8	4.1	3.4	1.4	2.1	5000	100	20		20.48
31004	20	22	7.4	4.4	3.7	1.6	2.3		100	20		22.02
31005	25	28	8.4	5	4.2	1.9	2.7	2000	50	10		25.87
31006	32	35	10	5.7	5	2.4	3.1	1600	50	5		32.68
31007	40	42	11.4	6.5	5.7	2.7	3.5	768	48	4		46.39
31008	50	54	13.8	7.7	6.9	3.4	4.2	480	30	2		55.44
31009	65	76.1	23	11	11.5	6.2	5.7		5		1	305.42
31010	80	88.9	26	12.7	13	7	6.7	80	5		1	334.20
31011	100	108	31	15.3	15.5	8	7.8	60	5		1	412.49

Geberit Mapress Stainless Steel T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33005	12 / 10 / 12	15	12	15	6.4	3.5	3.2	3.2	1.2	1.8	1.2			5	1	18.15
33006	15 / 10 / 15	18	12	18	6.8	3.7	3.4	3.4	1.4	2	1.4				1	18.91
31208	15 / 12 / 12	18	15	15	7.9	4.1	3.4	4.5	1.4	2.1	2.5		25	5		18.91
31204	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4		100	20		18.91
33007	20 / 10 / 20	22	12	22	7.4	3.9	3.7	3.7	1.6	2.3	1.6				1	19.24
31227	20 / 12 / 15	22	15	18	8.5	4.3	3.7	4.8	1.6	2.3	2.8			5	1	19.24
31206	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5000	100	20		19.24
31228	20 / 15 / 15	22	18	18	8.5	4.3	3.7	4.8	1.6	2.3	2.8			5	1	19.24
31207	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6		100	20		19.24
31209	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	3200	100	10		24.02
31210	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		100	10		24.02
31234	25 / 20 / 20	28	22	22	9	4.7	4.2	4.8	1.9	2.6	2.7		25	5		24.02



Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31211	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	2400	100	10		24.02
31212	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4		50	5		29.31
31213	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4		50	5		29.31
31235	32 / 20 / 25	35	22	28	10.4	5	5	5.4	2.4	2.9	3.1			5	1	29.31
31214	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4		50	5		29.31
31242	32 / 25 / 25	35	28	28	10.4	5.3	5	5.4	2.4	3	3.1			5	1	29.31
31215	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4		50	5		29.31
31216	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7			5	1	43.05
31217	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	768	48	4		43.05
31243	40 / 20 / 32	42	22	35	11.5	5.4	5.7	5.8	2.7	3.3	3.2				1	43.05
31218	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	768	48	4		43.05
31251	40 / 25 / 32	42	28	35	11.5	5.7	5.7	5.8	2.7	3.4	3.2				1	43.05
31219	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	768	48	4		43.05
31220	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	768	48	4		43.05
31221	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4			5	1	49.70
31222	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4		20	2		49.70
31223	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	480	30	2		49.70
31224	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	480	30	2		49.70
31225	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4	480	30	2		49.70
31226	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4	320	20	2		49.70
31229	65 / 20 / 65	76.1	22	76.1	23	7.2	11.5	11.5	6.2	5.1	6.2	200	5		1	258.46
31230	65 / 25 / 65	76.1	28	76.1	23	7.5	11.5	11.5	6.2	5.2	6.2		5		1	258.46
31231	65 / 32 / 65	76.1	35	76.1	23	7.9	11.5	11.5	6.2	5.3	6.2		5		1	258.46
31232	65 / 40 / 65	76.1	42	76.1	23	8.3	11.5	11.5	6.2	5.3	6.2		5		1	258.46
31233	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2		5		1	258.46
31236	80 / 20 / 80	88.9	22	88.9	26	7.8	13	13	7	5.7	7		5		1	281.65
31237	80 / 25 / 80	88.9	28	88.9	26	8.1	13	13	7	5.8	7		5		1	281.65
31238	80 / 32 / 80	88.9	35	88.9	26	8.5	13	13	7	5.9	7		5		1	281.65
31239	80 / 40 / 80	88.9	42	88.9	26	8.9	13	13	7	5.9	7		5		1	281.65
31240	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7	160	10		1	281.65
31241	80 / 65 / 80	88.9	76.1	88.9	26	11.6	13	13	7	6.3	7				1	281.65
31244	100 / 20 / 100	108	22	108	31	8.8	15.5	15.5	8	6.7	8				1	331.38
31245	100 / 25 / 100	108	28	108	31	9.1	15.5	15.5	8	6.8	8				1	331.38
31246	100 / 32 / 100	108	35	108	31	9.5	15.5	15.5	8	6.9	8	80	5		1	331.38
31247	100 / 40 / 100	108	42	108	31	9.9	15.5	15.5	8	6.9	8				1	331.38
31248	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8	80	5		1	331.38
31249	100 / 65 / 100	108	76.1	108	31	12.6	15.5	15.5	8	7.3	8	60	5		1	331.38
31250	100 / 80 / 100	108	88.9	108	31	13.7	15.5	15.5	8	7.7	8				1	331.38

Geberit Mapress Stainless Steel T-piece with male thread

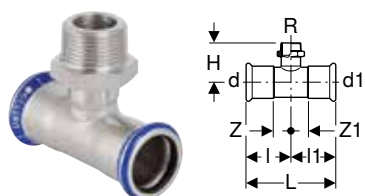

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	R	d1, Ø [mm]	L [cm]	l [cm]	l1 [cm]	H [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31401	12 / 10 / 12	15	3/8	15	6.4	3.2	3.2	5	1.2	1.2		1	26.13
31454	12 / 15 / 12	15	1/2	15	6.4	3.2	3.2	4	1.2	1.2	5	1	19.86
31455	15	18	1/2	18	6.8	3.4	3.4	4.2	1.4	1.4	5	1	19.86
31458	20	22	3/4	22	7.4	3.7	3.7	4.8	1.6	1.6	5	1	23.17
31461	25	28	1	28	8.4	4.2	4.2	5.4	1.9	1.9	5	1	26.49
31464	32	35	1 1/4	35	10	5	5	6	2.4	2.4		1	31.49

Geberit Mapress Stainless Steel T-piece with female thread

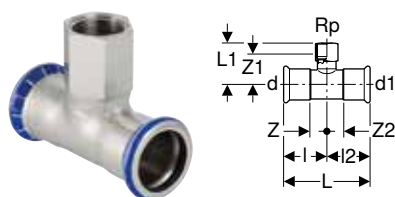

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	Rp	d1, Ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31304	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2		100	10		19.86
31305	15	18	1/2	18	6.8	4.1	3.4	3.4	1.4	2.9	1.4		100	10		19.86
31306	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4			5	1	19.86
31307	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6		100	20		23.17
31308	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6		50	10		23.17
31309	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9		50	10		26.49
31310	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9		50	10		26.49
31311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9			5	1	26.49
31312	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4	2000	50	5		31.49
31313	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4		50	5		31.49
31316	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7	768	48	4		35.63
31317	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7		24	4		35.63
31320	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	480	30	2		44.72
31321	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4	640	20	2		44.72
31324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	320	20		1	44.72
31326	65 / 20 / 65	76.1	3/4	76.1	23	7.4	11.5	11.5	6.2	5.9	6.2	250	5		1	265.04
31329	65 / 50 / 65	76.1	2	76.1	23	9.1	11.5	11.5	6.2	6.8	6.2	200	5		1	265.04
31331	80 / 20 / 80	88.9	3/4	88.9	26	8	13	13	7	6.5	7		5		1	281.65
31334	80 / 50 / 80	88.9	2	88.9	26	9.7	13	13	7	7.4	7		5		1	281.65
31336	100 / 20 / 100	108	3/4	108	31	9	15.5	15.5	8	7.5	8	80	5		1	331.38
31339	100 / 50 / 100	108	2	108	31	10.7	15.5	15.5	8	8.4	8				1	331.38



Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with weld-on and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- For welding on stainless steel pipes according to EN ISO 1127, material no. 1.4404
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4404 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	d1, \emptyset [mm]	s [mm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32412	12	15	17.2	1	4.5	3.4	5	1	36.45
32413	15	18	21.3	1	5	3.7	5	1	36.45
32414	20	22	26.9	1.2	5.5	3.9	5	1	38.61
32415	25	28	33.7	1.2	5.5	3.9	5	1	40.75
32416	32	35	42.4	1.5	6.5	4.4	5	1	42.89
32417	40	42	48.3	1.5	7.5	5.4	4	1	45.03
32418	50	54	60.3	1.5	8	5.8	4	1	49.32
32419	65	76.1	76.1	2	12	–		1	64.34
32420	80	88.9	88.9	2	13.5	–		1	69.04
32421	100	108	114.3	2	15	12.8		1	81.50

New

Geberit FlowFit adaptor to Geberit Mapress, with plain end, stainless steel



Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	d1, \emptyset [mm]	L [cm]	H [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.250.00.1	12	16	15	7.1	3.8	10		118.53 GBP
620.251.00.1	15	20	18	7.1	3.8	10		121.81 GBP
620.252.00.1	15 / 20	20	22	7.2	3.9	10		121.81 GBP
620.253.00.1	20	25	22	7.2	3.9	10		127.24 GBP
620.254.00.1	25	32	28	7.9	4.3	10		135.49 GBP
620.255.00.1	32	40	35	8.2	4.6	10		147.99 GBP
620.256.00.1	40	50	42	12.5	6.6	5		181.80 GBP
620.257.00.1	50	63	54	14.2	7.9	5	1	106.37 GBP

Available as of April 2023

New

Geberit FlowFit adaptor to Geberit Mapress, with plain end

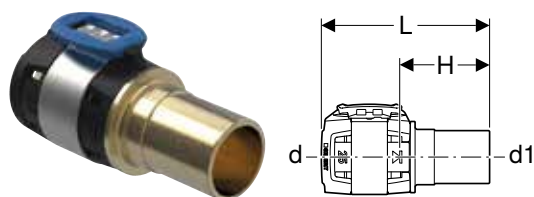

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data


Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77 GBP
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77 GBP
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01 GBP
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01 GBP
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01 GBP
620.232.00.1	20	25	22	7	3.7	25	5		13.91 GBP
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93 GBP
620.234.00.1	32	40	35	8	4.4	25	5		22.24 GBP
620.235.00.1	40	50	42	12.8	6.9	10			150.07 GBP
620.236.00.1	50	63	54	13.8	7.5	5			177.86 GBP

Available as of April 2023

New

Geberit FlowFit adaptor to Geberit Mapress, with pressing socket, stainless steel

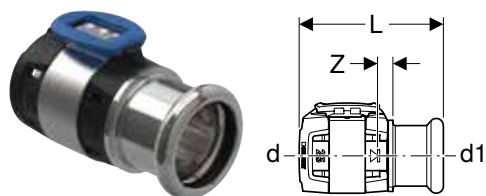

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.329.00.1	12 / 10	16	12	5.4	0.6	10		118.53 GBP
620.332.00.1	12	16	15	5.6	0.6	10		118.53 GBP
620.347.00.1	15 / 12	20	15	5.6	0.6	10		121.81 GBP
620.333.00.1	15	20	18	5.6	0.6	10		121.81 GBP
620.334.00.1	15 / 20	20	22	5.7	0.6	10		121.81 GBP
620.335.00.1	20	25	22	5.7	0.6	10		127.24 GBP
620.336.00.1	25	32	28	6.4	0.8	10		135.49 GBP
620.337.00.1	32	40	35	6.7	0.8	10		147.99 GBP
620.338.00.1	40	50	42	9.7	1.1	5		181.80 GBP
620.339.00.1	50	63	54	10.7	1.2	5	1	106.37 GBP

Available as of April 2023



Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	3.4		50	10	1	11.93
602.507.00.5	15 / 12	20	15	6.1	3.4		50	10	1	11.93
602.508.00.5	15	20	18	6.1	3.4		50	10		11.93
602.509.00.5	15 / 20	20	22	6.2	3.5		50	10	1	11.93
603.508.00.5	20	26	22	6.7	3.5		25	5		18.60
604.508.00.5	25	32	28	6.6	3.7		25	5		21.06
605.508.00.5	32	40	35	7.5	4.1		25	5		26.31
606.508.00.5	40	50	42	10.1	6.3		10		1	52.00
607.508.00.5	50	63	54	13.6	7	180	10		1	80.07

Geberit Mapress Stainless Steel adaptor with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33009	10 / 15	12	1/2	3.6	1.9		25	5		15.97
31726	12 / 10	15	3/8	3.8	1.8		50	5		14.87
31703	12 / 15	15	1/2	4.1	2.1	6400	200	20		14.87
31714	12 / 20	15	3/4	4.3	2.3		50	10		14.87
31704	15	18	1/2	4.2	2.2	6400	200	20		16.52
31705	15 / 20	18	3/4	4.4	2.4		100	20		16.52
31715	20 / 15	22	1/2	4.2	2.1		100	20		18.20
31707	20	22	3/4	4.4	2.3	6400	100	20		18.20
31716	20 / 25	22	1	4.6	2.5		100	10		18.20
31717	25 / 20	28	3/4	4.6	2.3		100	20		23.17
31708	25	28	1	4.8	2.3	4000	100	20		23.17
31718	25 / 32	28	1 1/4	4.8	2.5		50	10		23.17
31719	32 / 25	35	1	5.1	2.5	3200	50	5		33.13
31709	32	35	1 1/4	5.3	2.7	2400	50	5		33.13
31720	32 / 40	35	1 1/2	5.3	2.7	1600	25	5		33.13
31721	40 / 32	42	1 1/4	5.7	2.7		48	4		49.01
31710	40	42	1 1/2	5.7	2.7	1920	48	4		49.01
31722	50 / 40	54	1 1/2	8.3	4.8		25		1	66.24
31711	50	54	2	8.9	5.4	1000	25		1	66.24
31713	65	76.1	2 1/2	11.9	7		5		1	301.23
31724	80	88.9	3	13.7	7.7		5		1	451.99

Geberit Mapress Stainless Steel adaptor with male thread G

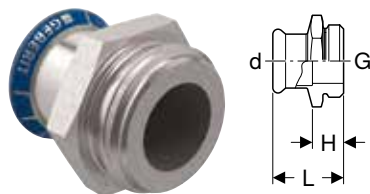

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
31731	12	15	3/4	3.5	1.5	1	29.37
31732	15	18	3/4	3.8	1.7	1	33.85
31733	20	22	1	4	1.9	1	44.99
31734	25	28	1 1/4	4.1	1.8	1	80.77
31735	32	35	1 1/2	4.7	2.1	1	83.32
31736	40	42	1 3/4	5.2	2.2	1	121.89
31737	50	54	2 3/8	6.3	2.8	1	217.02



Geberit Mapress Stainless Steel adaptor with male thread and plain end



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12 / 15	15	1/2	5.7	25	5		14.87
31933	15	18	1/2	5.7	25	5		16.52
31936	20	22	3/4	5.9	25	5		18.20
31937	25	28	1	6.6	25	5		23.17
31938	32	35	1 1/4	8		5	1	33.13
31939	40	42	1 1/2	9.1		5	1	49.01
31940	50	54	2	10.2		5	1	66.24

Geberit Mapress Stainless Steel adaptor with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33010	10 / 15	12	1/2	3.4	0.4			5	1	17.29
31801	12 / 10	15	3/8	3.5	0.5				1	14.87
31802	12 / 15	15	1/2	3.7	0.4		200	20		14.87
31823	12 / 20	15	3/4	3.8	0.3		50	5		14.87
31803	15	18	1/2	3.7	0.4	8000	100	20		16.52
31804	15 / 20	18	3/4	3.8	0.3		50	10		16.52
31805	20 / 15	22	1/2	3.6	0.2		100	20		18.20
31806	20	22	3/4	3.9	0.3	4800	100	20		18.20
31824	20 / 25	22	1	4.2	0.4		50	10		18.20
31807	25 / 15	28	1/2	3.8	0.2		50	5		23.17
31819	25 / 20	28	3/4	3.9	0.3		50	10		23.17
31809	25	28	1	4.4	0.4	3200	50	10		23.17
31825	25 / 32	28	1 1/4	4.6	0.4		25	5		23.17
31820	32 / 25	35	1	4.5	0.2		50	5		33.13
31811	32	35	1 1/4	4.9	0.4		50	5		33.13
31826	32 / 40	35	1 1/2	4.9	0.4		25	5		33.13
31821	40 / 32	42	1 1/4	5.1	0.2		48	4		49.01
31814	40	42	1 1/2	5.3	0.4		48	4		49.01
31822	50 / 40	54	1 1/2	7.7	2.1		25		1	66.24
31818	50	54	2	6.2	0.4	1000	25		1	66.24

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel
Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with female thread and plain end



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	5.8	4.5	1	21.07
33848	25 / 15	28	1/2	6.6	5.3	1	27.46
33850	32 / 15	35	1/2	6.9	5.6	1	36.38
33852	40 / 15	42	1/2	7.4	6.1	1	46.61
33854	50 / 15	54	1/2	7.9	6.6	1	55.53
33860	65 / 15	76.1	1/2	10.4	9.1	1	194.05
33862	80 / 15	88.9	1/2	11.3	10	1	275.75
33864	100 / 15	108	1/2	13.4	12.1	1	332.52

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12 / 15	15	1/2	14.8	13.5	9	5	1	14.87
90933	15	18	1/2	14.8	13.5	9	5	1	16.52
90934	15 / 20	18	3/4	15.2	13.3	9		1	16.52
90935	20 / 15	22	1/2	14.8	13.9	8.9	5	1	18.20
90936	20	22	3/4	15.2	13.7	8.7	5	1	18.20

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33833	12 / 15	15	1/2	5.7	3.7	3.7		50	10		21.54
33834	15	18	1/2	5.7	3.9	3.7		50	10		23.17
33835	20	22	3/4	6	4.6	3.9		50	10		29.83
33836	25	28	1	6.7	5.4	4.4		50	10		38.12
33837	32	35	1 1/4	7.5	6.3	4.9	240		5	1	51.37
33838	40	42	1 1/2	8.3	6.7	5.3			5	1	89.66
33839	50	54	2	9.4	7.8	5.9			5	1	114.48



Geberit Mapress Stainless Steel elbow adaptor 90° with female thread

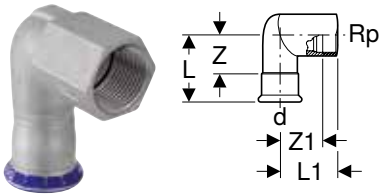

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33802	12 / 10	15	3/8	5.7	3.4	3.7	2.4			1	20.42
33803	12 / 15	15	1/2	5.7	3.7	3.7	2.4	100	20		20.70
33804	15	18	1/2	5.7	3.9	3.7	2.6	50	10		25.89
33808	N 20 / 15	22	1/2	5.8	3.9	3.7	2.4	50	10		26.40
33805	20	22	3/4	6	4.6	3.9	3.1	50	10		29.83
33806	25	28	1	6.7	5.4	4.3	3.7	40	10		38.12
33807	32	35	1 1/4	7.5	6.3	4.9	4.4	25	5		51.37

N: New, available as of April 2023

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	3.6	5.3	2.3	25	5	20.70

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit adaptor with male thread MF 1/2" and male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
632.007.00.1	15	1/2	1/2	4.2	10	1	12.19
632.008.00.1	20 / 15	1/2	3/4	4.2	10	1	16.65

Geberit adaptor with male thread MF 1/2" and male thread, stainless steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	RMF ["]	R ["]	H [cm]	SU1 [pc.]	GBP/pc.
632.005.00.1	15	1/2	1/2	4.2	1	33.03

Geberit adaptor with male thread MF 1/2" and female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Flat gasket made of Centellen® R WS 3825


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	G ["]	L [cm]	L1 [cm]	I1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
632.006.00.1	15	1/2	1/2	3.8	2.3	0.8	50	10	8.29



Geberit Mapress adaptor with MasterFix

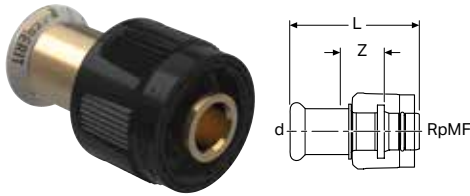

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61110	12 / 15	15	1/2	5.4	1.8	50	5	30.12

Geberit Mapress adaptor with MasterFix and plain end

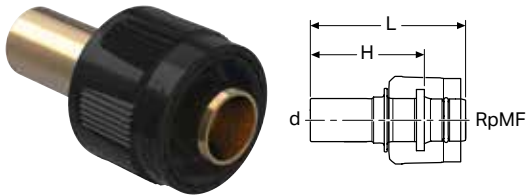

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- O-ring made of EPDM
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61112	12 / 15	15	1/2	5.6	4	30	5	40.39

Geberit Mapress elbow adaptor 90° with MasterFix

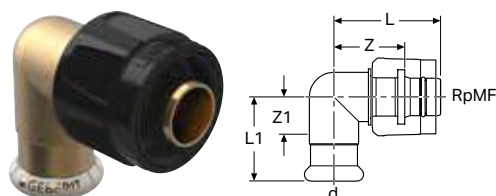

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61120	12 / 15	15	1/2	4.4	3.3	2.8	1.4	50	5	52.56

Geberit Mapress elbow adaptor 90° with MasterFix and plain end

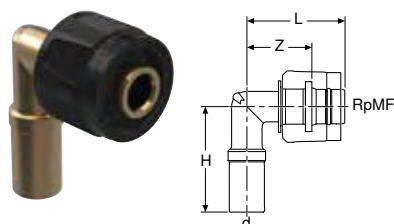

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- O-ring made of EPDM
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61121	12 / 15	15	1/2	4.4	4.5	2.8	30	5	55.12



Geberit Mapress Stainless Steel union



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35320	12	15	3/4	6.6	2.6		5	1	50.95
35321	15	18	3/4	6.9	2.9		5	1	57.74
35322	20	22	1	7.2	3	10		1	71.59
35323	25	28	1 1/4	7.7	3.1	10		1	109.95
35324	32	35	1 1/2	8.2	3		5	1	115.30
35325	40	42	1 3/4	9.5	3.5		5	1	166.15
35326	50	54	2 3/8	11.3	4.3		5	1	275.93

Geberit Mapress Stainless Steel union with union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
35390	12	15	3/4	6.6	2.6	1	62.90
35391	15	18	3/4	6.9	2.9	1	71.64
35392	20	22	1	7.2	3	1	88.66
35393	25	28	1 1/4	7.7	3.1	1	135.78
35394	32	35	1 1/2	8.2	3	1	141.99
35395	40	42	1 3/4	9.5	3.5	1	204.44
35396	50	54	2 3/8	11.3	4.3	1	339.29

Geberit Mapress Stainless Steel adaptor with union nut

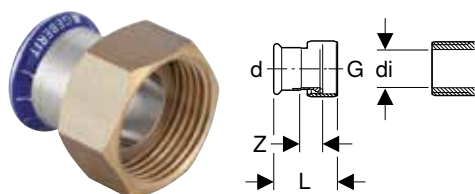

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35042	12	15	1/2	10	5.1	2.5	50	5		23.17
35032	12	15	3/4	13	3.7	1.1	50	10		18.20
35033	15	18	3/4	13	3.7	1.1	50	10		19.02
35034	20	22	1	20	4	1.1	100	10		26.49
35044	20	22	1 1/4	26	4.3	1.3		5	1	26.49
35045	20	22	1 1/2	32	4.4	1.3		5	1	26.49
35046	25	28	1	20	5.5	2.4	50	5		34.78
35035	25	28	1 1/4	26	4.4	1.3	50	10		34.78
35047	25	28	1 1/2	32	4.6	1.3		5	1	34.78
35036	32	35	1 1/2	32	4.8	1.3	50	5		38.12
35037	40	42	1 3/4	39	5.2	1.3	48	4		50.73
35038	50	54	2 3/8	51	5.8	1.5	25		1	68.48
35039	65	76.1	3	73	9.9	3.3			1	281.65
35040	80	88.9	3 1/2	84	11.1	3.7			1	364.49

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel

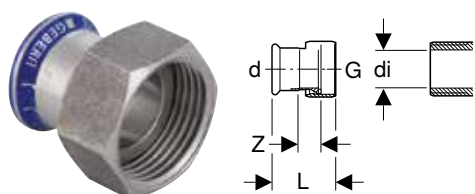

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35132	12	15	3/4	13	3.7	1.1	25	5		23.51
35134	20	22	1	20	4	1.1		5	1	29.34
35075	25	28	1 1/2	32	4.4	1.3		5	1	66.94



Geberit Mapress Stainless Steel adaptor union with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35330	12 / 15	15	1/2	3/4	6.4	4.4	50	2		26.49
35331	12 / 20	15	3/4	3/4	6.6	4.6		5	1	26.49
35332	15	18	1/2	3/4	6.4	4.4	50	5		28.64
35333	15 / 20	18	3/4	3/4	6.6	4.6	20	2		28.64
35334	20 / 15	22	1/2	1	6.7	4.6	20	2		29.83
35335	20	22	3/4	1	6.8	4.7	20	2		29.83
35336	20 / 25	22	1	1	7.3	5.2	20	2		29.83
35337	25	28	1	1 1/4	7.8	5.5	20	2		49.70
35338	32	35	1 1/4	1 1/2	8.5	5.9	20	2		64.60
35339	40	42	1 1/2	1 3/4	9	6	25		1	74.40
35340	50	54	2	2 3/8	10.3	6.8	15		1	129.21

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35360	12 / 15	15	1/2	3/4	6.4	4.4	50	2		34.78
35361	12 / 20	15	3/4	3/4	6.6	4.6			1	34.78
35362	15	18	1/2	3/4	6.4	4.4	50	2		39.74
35363	15 / 20	18	3/4	3/4	6.6	4.6		5	1	39.74
35364	20 / 15	22	1/2	1	6.7	4.6		5	1	41.40
35365	20	22	3/4	1	6.8	4.7	50	2		41.40
35366	20 / 25	22	1	1	7.3	5.2			1	41.40
35367	25	28	1	1 1/4	7.8	5.5	30	2		62.93
35368	32	35	1 1/4	1 1/2	8.5	5.9	20	2		84.14
35369	40	42	1 1/2	1 3/4	9	6	20		1	97.34
35370	50	54	2	2 3/8	10.3	6.8	15		1	168.23

Geberit Mapress Stainless Steel adaptor union with male thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35400	12 / 15	15	1/2	3/4	8.6		1	34.78
35402	15	18	1/2	3/4	8.6		1	39.74
35405	20	22	3/4	1	9.2		1	41.40
35407	25	28	1	1 1/4	10.1	5	1	62.93
35408	32	35	1 1/4	1 1/2	10.9		1	84.14
35409	40	42	1 1/2	1 3/4	11.5		1	97.34
35410	50	54	2	2 3/8	12.9		1	168.23

Geberit Mapress Stainless Steel adaptor union with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35300	12 / 15	15	1/2	3/4	5.9	2.6	25	5		26.49
35301	12 / 20	15	3/4	3/4	6.1	2.6			1	26.49
35302	15	18	1/2	3/4	5.9	2.6	25	5		28.64
35303	15 / 20	18	3/4	3/4	6.1	2.6		5	1	28.64
35304	20	22	3/4	1	6.3	2.7	50	2		29.83
35305	20 / 25	22	1	1	6.6	2.8	25	5		29.83
35306	25	28	1	1 1/4	7.1	3.1	30	2		49.70
35307	32	35	1 1/4	1 1/2	7.7	3.2	20	2		64.60
35308	40	42	1 1/2	1 3/4	8.2	3.3	25		1	74.40
35309	50	54	2	2 3/8	9.5	3.7		5	1	129.21



Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35350	12 / 15	15	1/2	3/4	5.9	2.6	5	1	34.78
35357	12 / 20	15	3/4	3/4	6.1	2.6		1	34.78
35351	15	18	1/2	3/4	5.9	2.6	5	1	39.74
35358	15 / 20	18	3/4	3/4	6.1	2.6		1	39.74
35352	20	22	3/4	1	6.3	2.7	5	1	41.40
35359	20 / 25	22	1	1	6.6	2.8		1	41.40
35353	25	28	1	1 1/4	7.1	3.1	5	1	62.93
35354	32	35	1 1/4	1 1/2	7.7	3.2	5	1	84.14
35355	40	42	1 1/2	1 3/4	8.2	3.3	5	1	97.34
35356	50	54	2	2 3/8	9.5	3.7		1	168.23

Geberit Mapress Stainless Steel adaptor union with female thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35380	12 / 15	15	1/2	3/4	8.1	5.9		1	34.78
35382	15	18	1/2	3/4	8.1	5.9		1	39.74
35384	20	22	3/4	1	8.7	6.4		1	41.40
35386	25	28	1	1 1/4	9.4	6.7		1	62.93
35387	32	35	1 1/4	1 1/2	10.1	7.2		1	84.14
35388	40	42	1 1/2	1 3/4	10.7	7.7	5	1	97.34
35389	50	54	2	2 3/8	12	8.4		1	168.23

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes

- Suitable exclusively for liquid media

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	19.52
22431	12	20	15	6.7	5.2	10	2	22.77
22422	15	16	18	6.4	4.9	10	2	21.17
22432	15	20	18	6.7	5.2	10	2	24.42
22423	20	16	22	6.8	5.9	10	2	22.77
22433	20	20	22	6.8	5.9	10	2	26.02
22444	25	25	28	6.8	5.9	10	2	35.78



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket

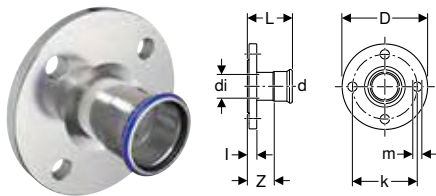

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33732	15 / 12	15	15	9.5	65	14	6.1	1.6	4.1	4	10 / 16	624	1	60.48
33733	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16	624	1	62.14
33734	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16		1	73.49
33735	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	89.84
33736	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	126.88
33737	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	148.82
33738	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	192	1	183.53
33739	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	289.89
33740	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	344.49
33741	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	408.95

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112



Geberit Mapress Stainless Steel flange PN 10/16, with plain end

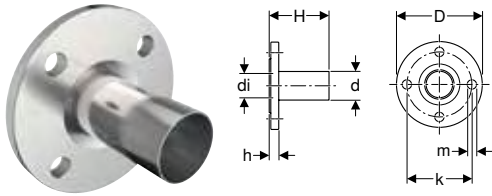

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	69.98
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	85.56
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	120.83
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	141.74
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	75	1	249.95
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	286.15
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	334.96
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	401.30

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6

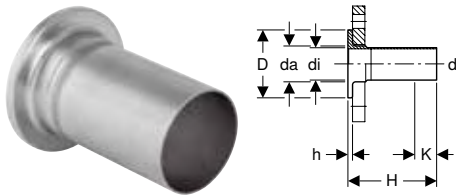

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	3.7	6		1	90.93
36151	32	35	40	32	7	13.5	0.6	2.7	6		1	130.89
36152	40	42	47	39	8	13.5	0.6	0	6		1	152.75
36153	50	54	59	51	9	13.5	0.8	0	6		1	189.11
36154	65	76.1	78	73.1	11	13.5	0.8	0	6		1	298.19
36155	80	88.9	91	84.9	12.8	13.5	1	0	6	96	1	349.11
36156	100	108	110	104	14.8	13.5	1	0	6	75	1	418.24


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 111

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	84.57
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	103.14
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	148.97
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	173.26
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16	160	1	214.50
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	75	1	338.27
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	75	1	396.03
36148	100	108	110	104	15.8	13.5	1	0	10 / 16	75	1	474.39

To order additionally


- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 112

Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For service water and process water
- For treated water
- For rainwater with a pH value of > 6.0
- For grey and black water with pH value > 6.0
- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Maximum operating pressure	16 bar
Operating temperature	-30 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	D [cm]	La [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33932	12	15	2.6	+/- 7	15.1		1	133.46
33933	15	18	2.6	+/- 7	14.7		1	140.95
33934	20	22	3.1	+/- 11	10.6		1	162.79
33935	25	28	3.9	+/- 13	12		1	175.81
33936	32	35	4.6	+/- 13	13.9	5	1	197.62
33937	40	42	5.9	+/- 13	14.9		1	354.99
33938	50	54	7	+/- 18	17.6		1	404.44
33939	65	76.1	8.8	+/- 22	26.2		1	502.70
33940	80	88.9	11.7	+/- 23	28.6		1	565.24
33941	100	108	14.4	+/- 23	54.2		1	1148.32



Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	D [cm]	L [cm]	l [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	69.62
90981	15	18	3	45	16.5		1	71.32
90982	20	22	3.4	45	16.5	5	1	74.82
90983	25	28	3.8	45	16.5	5	1	81.77
90984	32	35	4.5	45	16.5	5	1	99.16
90985	40	42	5.4	45	16.5	5	1	118.30
90986	50	54	7	45	16.5	5	1	130.50
90987	65	76.1	8.9	45	16.5		1	295.73
90988	80	88.9	10.8	45	16.5		1	330.57
90989	100	108	13.3	45	16.5		1	365.36

Sealings

Geberit Mapress Stainless Steel cap



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33212	12	15	2.3	0.3	50	10		13.01
33213	15	18	2.3	0.3	50	5		15.63
33214	20	22	2.4	0.3	50	5		16.91
33215	25	28	2.6	0.3	50	5		20.33
33216	32	35	2.9	0.3	50	5		28.40
33217	40	42	3.3	0.3	25		1	61.87
33218	50	54	3.8	0.3	25		1	68.05
33219	65	76.1	6	0.7			1	86.60
33220	80	88.9	6.7	0.7			1	105.47
33221	100	108	8.2	0.7			1	146.10

Connections

Geberit tap connector, straight, with male thread MF 1/2"

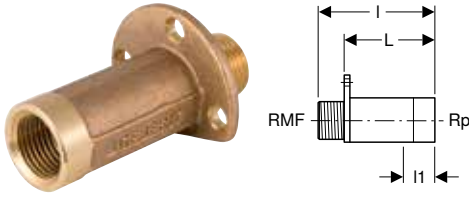

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Volex

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	I [cm]	I1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 5.7 cm									
602.283.00.1	15	1/2	1/2	7.9	2.7	50	10	1	17.57

Accessories

- Geberit sound insulation base for tap connector, straight → p. 224

Geberit set of tap connector, straight, with male thread MF 1/2", premounted, drywall construction

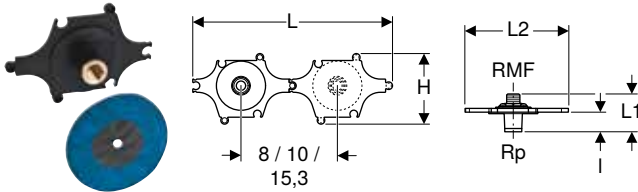

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Scope of delivery

- Tap connector, straight
- Insulating sleeve
- Drilling template
- Sealing washer
- Fastening material

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Art. no.	DN	RMF ["]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
602.295.00.1	15	1/2	1/2	31.6	6	16.5	3.1	11	20	2	28.46

Accessories

- Geberit mounting aid set for straight connector, for drywall construction → p. 230



Geberit Mapress Stainless Steel elbow tap connector 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm												
33013	10 / 15	12	1/2	4.6	1.3	1.5	2.9			5	1	25.94
33403	12 / 15	15	1/2	5	1.3	1.5	3	4000	100	20		25.62
33405	15	18	1/2	5	1.3	1.5	3	4000	100	20		27.58
L1 / length: 5.1 cm												
33407	20	22	3/4	5.4	1.7	1.6	3.3		50	10		39.65

Geberit elbow tap connector 90° with male thread MF 1/2"

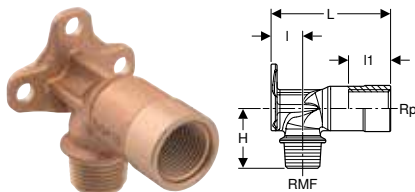

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	l [cm]	l1 [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 5.7 cm										
602.285.00.1	15	1/2	1/2	1.8	2.6	3.5	2500	50	10	13.27
L / length: 7.3 cm										
602.287.00.2	15	1/2	1/2	1.8	3	3.5		50	10	16.20

Accessories

- Geberit sound insulation set for single elbow tap connector 90° → p. 103

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 6.5 cm										
33423	12 / 15	15	1/2	5	3.5	1.5	3	50	10	25.36
33425	15	18	1/2	5	3.5	1.5	3	50	10	27.38
33427	20	22	3/4	5.4	3.1	1.6	3.3	25	5	39.24

Geberit Mapress Stainless Steel corner elbow 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33503	12 / 15 / 12	15	1/2	15	6	4.3	1.3	1.5	4	50	5	39.34



Geberit elbow tap connector 90° with male thread MF 1/2", premounted, single, short

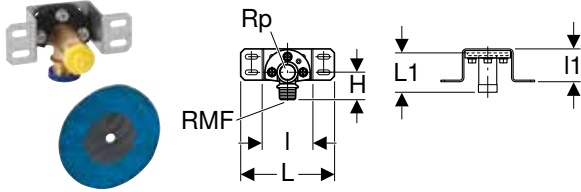

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery

- Sealing washer
- Protection plug
- Fastening material


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	L [cm]	I [cm]	I1 [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.7 cm										
632.856.00.1	15	1/2	1/2	12	6.5	4	3.5	10	1	43.00

Geberit Mapress Stainless Steel, gas System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo, plastic-jacketed (gas)

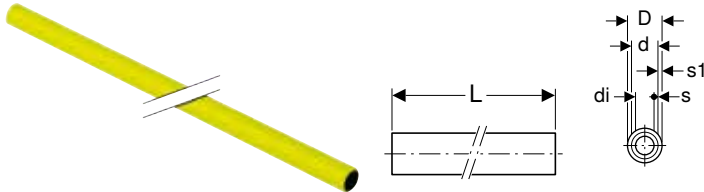

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Plastic jacketing made of PP, yellow
- Protected against external chemical and electrochemical factors

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU3 [m]	GBP/m
39112	12	15	13	1.7	1	0.9	6	60	17.57
39113	15	18	16	2	1	0.9	6	60	21.32
39114	20	22	19.6	2.4	1.2	0.9	6	60	29.25
39115	25	28	25.6	3	1.2	0.9	6	60	35.36
39116	32	35	32	3.7	1.5	0.9	6	30	52.82
39117	40	42	39	4.4	1.5	0.9	6	30	62.81
39118	50	54	51	5.6	1.5	0.9	6	30	80.89

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress stripping tool → p. 428
- Geberit Mapress stripping tool → p. 429
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Geberit Mapress Stainless Steel system pipe CrNiMo

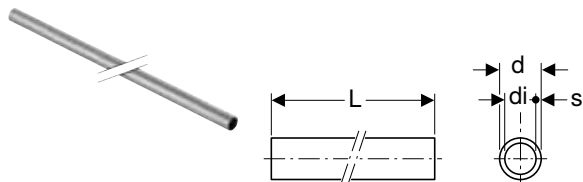

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
39002	12	15	13	1	6	840	120		13.73
39003	15	18	16	1	6	420	60		16.20
39004	20	22	19.6	1.2	6	420	60		21.91
39005	25	28	25.6	1.2	6	180	60		27.01
39006	32	35	32	1.5	6	180	30		39.80
39007	40	42	39	1.5	6	180	30		48.94
39008	50	54	51	1.5	6	180	30		62.29
39009	65	76.1	72.1	2	6	144		6	126.23
39010	80	88.9	84.9	2	6	96		6	143.82
39011	100	108	104	2	6	78		6	173.21

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Pipe nipples

Geberit Mapress Stainless Steel pipe nipple



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	3.98
32051	15	18	16	1	5	5	1	4.31
32052	20	22	19.6	1.2	5.2	5	1	4.60
32053	25	28	25.6	1.2	5.6	5	1	5.87
32054	32	35	32	1.5	6.2		1	7.53
32055	40	42	39	1.5	8		1	10.67
32056	50	54	51	1.5	9		1	13.83
32057	65	76.1	72.1	2	13.6		1	56.98
32058	80	88.9	84.9	2	15		1	66.43
32059	100	108	104	2	18		1	92.98



Couplings

Geberit Mapress Stainless Steel coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34101	12	15	4.8	0.8		25	5		8.83
34102	15	18	4.8	0.8		25	5		9.50
34103	20	22	5	0.8		50	5		11.11
34104	25	28	5.4	0.8		50	5		12.60
34105	32	35	6.2	1		50	5		15.57
34106	40	42	7.1	1.1		24	4		21.26
34107	50	54	8.3	1.3	800	50	2		25.54
34248	65	76.1	12.7	2.1	320	20		1	126.30
34249	80	88.9	14.5	2.5		5		1	144.38
34250	100	108	17.6	2.6		5		1	183.41

Geberit Mapress Stainless Steel slip coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34108	12	15	2.5	8	3		1	14.68
34109	15	18	2.5	8	3		1	15.28
34110	20	22	2.5	8.4	3.4	5	1	17.45
34111	25	28	3	9.1	3.1	5	1	20.20
34112	32	35	3	10.2	4.2		1	22.58
34113	40	42	4	12	4		1	26.26
34114	50	54	4	14	6		1	33.54
34162	65	76.1	6	23	11		1	118.46
34121	80	88.9	7	26	12		1	194.40
34122	100	108	8	31	15		1	252.62

Reducers

Geberit Mapress Stainless Steel reducer with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Concentric
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34115	15 / 12	18	15	5.5	3.5		5	1	9.79
34116	20 / 12	22	15	5.9	3.9		5	1	10.78
34117	20 / 15	22	18	5.7	3.7	25	5		10.78
34118	25 / 12	28	15	6.6	4.6			1	12.26
34119	25 / 15	28	18	6.4	4.4		5	1	12.26
34120	25 / 20	28	22	6	3.9	50	5		12.26
34123	32 / 20	35	22	7.1	5		5	1	20.80
34124	32 / 25	35	28	6.8	4.5	25	5		20.80
34127	40 / 20	42	22	8.2	6.1			1	21.04
34128	40 / 25	42	28	8.3	6		5	1	36.06
34129	40 / 32	42	35	7.7	5.1		5	1	36.06
34132	50 / 20	54	22	9.5	7.4			1	33.34
34133	50 / 25	54	28	11	8.7		5	1	52.94
34134	50 / 32	54	35	10.6	8		5	1	52.94
34135	50 / 40	54	42	9.2	6.2		5	1	52.94
34296	65 / 50	76.1	54	14.6	11.1	5		1	113.47
34297	80 / 50	88.9	54	16.2	12.8	5		1	121.04
34298	80 / 65	88.9	76.1	16.1	10.8			1	121.04
34259	100 / 50	108	54	17.2	13.7			1	132.38
34260	100 / 65	108	76.1	18.4	13.1			1	132.38
34261	100 / 80	108	88.9	20.3	14.3			1	132.38



- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2022 to April 2023' overview

Bends

Geberit Mapress Stainless Steel bend (gas)

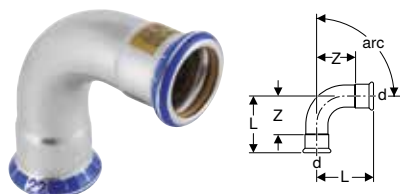

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34014	12	15	2.8	0.8			5	1	13.58
34015	15	18	2.9	0.9			5	1	15.28
34016	20	22	3.2	1.1		50	5		18.53
34017	25	28	3.7	1.4	2500	50	5		23.46




Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34193	32	35	4.3	1.7		20	2		35.00
34194	40	42	5.1	2.1			5	1	54.86
34195	50	54	6.2	2.7			5	1	75.65
34447	65	76.1	10.3	5		5		1	193.83
34448	80	88.9	11.7	5.7				1	237.55
34449	100	108	14.3	6.8				1	324.83
arc / angle: 90°									
34000	12	15	4.9	2.9		50	5		13.58
34001	15	18	5.3	3.3			50	5	15.28
34002	20	22	6.1	4	2500	50	5		18.53
34003	25	28	5.7	3.4	2500	50	5		23.46
34187	32	35	6.8	4.2		50	5		35.00
34188	40	42	8	5	768	48	4		54.86
34189	50	54	10	6.5	400	25		1	75.65
34441	65	76.1	15.9	10.6		5		1	193.83
34442	80	88.9	18.5	12.5	80	5		1	237.55
34443	100	108	23	15.5	60	5		1	324.83



• Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview

Geberit Mapress Stainless Steel bend with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°										
34021	12	15	2.8	3.6	0.8			5	1	13.58
34022	15	18	2.9	3.6	0.9		25	5		15.28
34023	20	22	3.2	3.9	1.1		50	5		18.53
34024	25	28	3.7	4.4	1.4		50	5		23.46
34196	32	35	4.3	5	1.7		20	2		35.00
34197	40	42	5.1	5.9	2.1			5	1	54.86
34198	50	54	6.2	7	2.7		24	2		75.65
34450	65	76.1	10.3	11.1	5				1	193.83
34451	80	88.9	11.7	12.8	5.7				1	237.55
34452	100	108	14.3	15.8	6.8				1	324.83
arc / angle: 90°										
34007	12	15	4.9	5.9	2.9		25	5		13.58
34008	15	18	5.3	6.1	3.3		25	5		15.28
34009	20	22	6.1	7	4		50	5		18.53
34010	25	28	5.7	6.3	3.4	2500	50	5		23.46
34190	32	35	6.8	7.4	4.2		50	2		35.00
34191	40	42	8	8.8	5		24	2		54.86
34192	50	54	10	10.8	6.5		25		1	75.65
34444	65	76.1	15.9	16.7	10.6		5		1	193.83
34445	80	88.9	18.5	19.5	12.5				1	237.55
34446	100	108	23	24.1	15.5				1	324.83



• Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview

Geberit Mapress Stainless Steel bend with plain ends



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, Ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
30892	12	15	4	11	0	7				1	13.76
30893	15	18	4	11.2	0	7.1				1	14.05
30894	20	22	4.1	11.4	0	7.3				1	14.87
30905	25	28	4.3	11.9	0	7.6			5	1	15.41
30906	32	35	4.1	11.8	0	7.7				1	32.29
30907	40	42	4.7	13.7	0	9				1	39.74
30908	50	54	5.5	14.9	0	9.4				1	49.70
30009	65	76.1	8.4	20.4	0	12				1	155.70
30010	80	88.9	9.5	22	0	12.5				1	175.60
30011	100	108	11.7	25.4	0	13.7				1	210.39
arc / angle: 30°											
30932	12	15	4.3	11.3	0	7				1	13.76
30933	15	18	4.4	11.6	0	7.1				1	14.05
30934	20	22	4.6	11.8	0	7.2			5	1	14.87
30935	25	28	4.8	12.4	0	7.6			5	1	15.41
30936	32	35	4.6	12.3	0	7.7				1	32.29
30937	40	42	5.4	14.4	0	9				1	39.74
30938	50	54	6.3	15.7	0	9.4				1	49.70
30029	65	76.1	9.7	21.7	0	12				1	155.70
30030	80	88.9	11.1	23.6	0	12.5				1	175.60
30031	100	108	13.6	27.3	0	13.7				1	210.39
arc / angle: 45°											
30872	12	15	4.5	11.6	0	7.1			5	1	13.76
30873	15	18	4.2	11.7	0	7.5				1	14.05
30874	20	22	4.2	12.3	0	7.1				1	14.87
30875	25	28	5.6	13.1	0	7.5				1	15.41
30876	32	35	5.3	12.9	0	7.6				1	32.29
30877	40	42	6.1	15.1	0	9				1	39.74
30878	50	54	7.3	16.7	0	9.4				1	49.70
30049	65	76.1	11.1	23	0	11.9				1	155.70
30050	80	88.9	13	25.2	0	12.2				1	175.60
30051	100	108	15.7	29.4	0	13.7				1	210.39
arc / angle: 60°											
30942	12	15	5	12	0	7				1	13.76
30943	15	18	5.3	12.4	0	7.1				1	14.05
30944	20	22	5.6	12.8	0	7.2				1	14.87
30955	25	28	6.1	13.7	0	7.6				1	15.41
30956	32	35	5.9	13.6	0	7.7				1	32.29
30957	40	42	6.9	15.9	0	9				1	39.74
30958	50	54	8.3	17.7	0	9.4				1	49.70
30069	65	76.1	12.6	24.6	0	12				1	155.70
30070	80	88.9	14.6	27.1	0	12.5				1	175.60
30071	100	108	18	31.7	0	13.7				1	210.39
arc / angle: 90°											
30402	12	15	5.9	12.9	0	7	5600	50	10		13.76
30403	15	18	6.1	13.3	0	7.2		50	10		14.05
30404	20	22	7	14.2	0	7.2		50	10		14.87
30405	25	28	7.9	15.5	0	7.6		50	10		15.41
30406	32	35	7.7	15.4	0	7.7			5	1	32.29
30407	40	42	9	18	0	9			5	1	39.74
30408	50	54	11.1	20.5	0	9.4			5	1	49.70
30089	65	76.1	16.6	28.6	0	12				1	155.70
30090	80	88.9	19.4	31.9	0	12.5				1	175.60
30091	100	108	24	37.7	0	13.7				1	210.39



Geberit Mapress Stainless Steel bend 90°, long



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU1 [pc.]	GBP/pc.
30414	20	22	7	84	1.5	77	1	41.96
30415	25	28	8	85	1.7	77	1	44.96

Geberit Mapress Stainless Steel pipe bridge

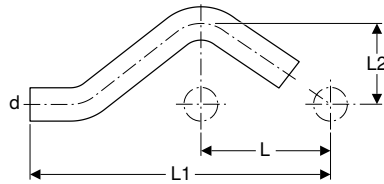

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	6	16.5	3.2	25	5		11.85
30803	15	18	6	16.6	3.3	25	5		12.26
30804	20	22	6	16.8	3.5	25	5		13.91
30805	25	28	6	17.9	3.8			1	16.88

T-pieces

Geberit Mapress Stainless Steel T-piece, equal (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34028	12	15	6.4	3.9	3.2	1.2	1.9			5	1	20.53
34029	15	18	6.8	4.1	3.4	1.4	2.1			5	1	23.39
34030	20	22	7.4	4.4	3.7	1.6	2.3		25	5		25.15
34031	25	28	8.4	5	4.2	1.9	2.7	2000	25	5		29.52
34032	32	35	10	5.7	5	2.4	3.1			5	1	37.25
34033	40	42	11.4	6.5	5.7	2.7	3.5			5	1	52.97
34034	50	54	13.8	7.7	6.9	3.4	4.2			5	1	63.29
34285	65	76.1	23	11	11.5	6.2	5.7				1	348.71
34286	80	88.9	26	12.7	13	7	6.7				1	381.55
34287	100	108	31	15.3	15.5	8	7.8				1	470.96

Geberit Mapress Stainless Steel T-piece, reduced (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34035	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4		1	21.19
34036	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	22.68
34037	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6		1	22.68
34038	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	27.39
34039	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	27.39
34040	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	5	1	27.39
34041	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4		1	33.44
34042	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4		1	34.03
34043	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4	5	1	34.03
34044	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	5	1	34.03
34140	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	43.29
34141	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	43.29
34045	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	5	1	49.17
34046	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5	1	49.17
34047	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7		1	49.17
34048	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	5	1	56.73
34049	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	5	1	56.73
34050	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4		1	56.73
34051	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4		1	56.73



Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34097	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2		1	295.08
34098	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7		1	321.57
34099	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8		1	378.32

Geberit Mapress Stainless Steel T-piece with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34052	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2			1	22.68
34053	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4			1	22.68
34054	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4			1	22.68
34055	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	25	5		26.49
34056	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6			1	26.49
34057	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	25	5		30.23
34058	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9			1	30.23
34059	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4		5	1	30.91
34060	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4			1	35.91
34061	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7		5	1	40.64
34126	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7			1	40.64
34063	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4		5	1	51.07
34264	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4			1	51.07
34265	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4			1	51.07
34266	65 / 20 / 65	76.1	3/4	76.1	23	7.4	11.5	11.5	6.2	5.9	6.2			1	302.65
34267	65 / 50 / 65	76.1	2	76.1	23	9.1	11.5	11.5	6.2	6.8	6.2			1	302.65
34268	80 / 20 / 80	88.9	3/4	88.9	26	8	13	13	7	6.5	7			1	321.57
34269	80 / 50 / 80	88.9	2	88.9	26	9.7	13	13	7	7.4	7			1	321.57
34270	100 / 20 / 100	108	3/4	108	31	9	15.5	15.5	8	7.5	8			1	378.32
34271	100 / 50 / 100	108	2	108	31	10.7	15.5	15.5	8	8.4	8			1	378.32



- Fittings with screwing joints >2" have a reduced operating pressure: MOP 0.1 / GT 0.1

Adaptors, permanent

Geberit Mapress Stainless Steel adaptor to cutting ring connection (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	I [cm]	H [cm]	SU1 [pc.]	GBP/pc.
34355	12	15	8	5.1	6	1	18.70

Geberit Mapress Stainless Steel adaptor with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34066	12 / 15	15	1/2	4.1	2.1	50	5		16.99
34142	12 / 20	15	3/4	4.3	2.3			1	16.99
34067	15	18	1/2	4.2	2.2	50	5		18.90
34143	15 / 20	18	3/4	4.4	2.4			1	18.90
34069	20 / 15	22	1/2	4.2	2.1	50	5		20.80
34070	20	22	3/4	4.4	2.3	50	5		20.80
34346	20 / 25	22	1	4.6	2.5	50	5		20.80
34068	25 / 20	28	3/4	4.6	2.3	50	5		26.49
34071	25	28	1	4.8	2.3	50	5		26.49
34075	32 / 25	35	1	5.1	2.5	25	5		37.86
34072	32	35	1 1/4	5.3	2.7	50	2		37.86
34076	32 / 40	35	1 1/2	5.3	2.7		5	1	37.86
34073	40	42	1 1/2	5.7	2.7	25		1	55.95
34074	50	54	2	8.9	5.4	25		1	75.65
34077	65	76.1	2 1/2	12.3	7	5		1	343.91
34078	80	88.9	3	13.7	7.7			1	516.01



- Fittings with screwing joints >2" have a reduced operating pressure: MOP 0.1 / GT 0.1

Geberit Mapress Stainless Steel adaptor with male thread and plain end



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12 / 15	15	1/2	5.7	25	5		14.87
31933	15	18	1/2	5.7	25	5		16.52
31936	20	22	3/4	5.9	25	5		18.20
31937	25	28	1	6.6	25	5		23.17
31938	32	35	1 1/4	8		5	1	33.13
31939	40	42	1 1/2	9.1		5	1	49.01
31940	50	54	2	10.2		5	1	66.24



Geberit Mapress Stainless Steel adaptor with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34083	12 / 15	15	1/2	3.7	0.4		25	5		16.18
34169	12 / 20	15	3/4	3.8	0.3				1	16.18
34084	15	18	1/2	3.7	0.4			5	1	18.17
34170	15 / 20	18	3/4	3.8	0.3				1	18.17
34086	20 / 15	22	1/2	3.6	0.2		25	5		19.26
34087	20	22	3/4	3.9	0.3		25	5		19.26
34347	20 / 25	22	1	4.2	0.4			5	1	20.41
34089	25	28	1	4.4	0.4	3200	50	5		25.91
34093	32 / 25	35	1	4.5	0.2			5	1	37.86
34090	32	35	1 1/4	4.9	0.4			5	1	37.86
34091	40	42	1 1/2	5.3	0.4			5	1	53.30
34092	50	54	2	6.2	0.4			5	1	72.06

Geberit Mapress Stainless Steel adaptor with female thread and plain end



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	5.8	4.5	1	21.07
33848	25 / 15	28	1/2	6.6	5.3	1	27.46
33850	32 / 15	35	1/2	6.9	5.6	1	36.38
33852	40 / 15	42	1/2	7.4	6.1	1	46.61
33854	50 / 15	54	1/2	7.9	6.6	1	55.53
33860	65 / 15	76.1	1/2	10.4	9.1	1	194.05
33862	80 / 15	88.9	1/2	11.3	10	1	275.75
33864	100 / 15	108	1/2	13.4	12.1	1	332.52

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12 / 15	15	1/2	14.8	13.5	9	5	1	14.87
90933	15	18	1/2	14.8	13.5	9	5	1	16.52
90934	15 / 20	18	3/4	15.2	13.3	9		1	16.52
90935	20 / 15	22	1/2	14.8	13.9	8.9	5	1	18.20
90936	20	22	3/4	15.2	13.7	8.7	5	1	18.20

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34149	12 / 15	15	1/2	5.7	3.7	3.7		1	23.77
34150	15	18	1/2	5.7	3.9	3.7		1	25.62
34151	20	22	3/4	6	4.6	3.9	10	1	32.83
34154	25 / 20	28	3/4	5.8	4.6	3.5		1	41.94
34152	25	28	1	6.7	5.4	4.4	5	1	41.94
34153	32	35	1 1/4	7.5	6.3	4.9		1	59.96

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (gas)

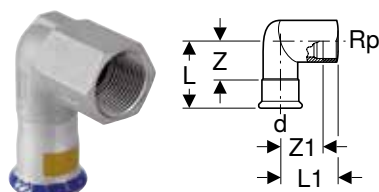

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34144	12 / 15	15	1/2	5.7	3.7	3.7	2.4		1	27.15
34145	15	18	1/2	5.7	3.9	3.7	2.6	5	1	30.66
34146	20	22	3/4	6	4.6	3.9	3.1	5	1	36.57
34147	25	28	1	6.7	5.4	4.3	3.7	5	1	47.38
34148	32	35	1 1/4	7.5	6.3	4.9	4.4		1	80.88

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106



Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	3.6	5.3	2.3	25	5	20.70

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (gas)



Application purposes

- For connecting to house supply pipes
- For connecting measuring devices, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of Centellen® HD WS 3822
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34430	12 / 15	15	1/2	3/4	6.4	4.4	5	1	30.23
34431	12 / 20	15	3/4	3/4	6.6	4.6		1	30.23
34432	15	18	1/2	3/4	6.4	4.4		1	32.73
34433	15 / 20	18	3/4	3/4	6.6	4.6		1	32.73
34434	20 / 15	22	1/2	1	6.7	4.6		1	34.03
34435	20	22	3/4	1	6.8	4.7	5	1	34.03
34436	20 / 25	22	1	1	7.3	5.2		1	34.03
34437	25	28	1	1 1/4	7.8	5.5	5	1	56.73
34438	32	35	1 1/4	1 1/2	8.5	5.9	5	1	73.77
34439	40	42	1 1/2	1 3/4	9	6		1	84.93
34440	50	54	2	2 3/8	10.3	6.8	5	1	147.56

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (gas)



Application purposes

- For connecting to house supply pipes
- For connecting measuring devices, control valves and protection devices
- For connecting gas devices
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Flat gasket made of Centellen® HD WS 3822
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
34400	12 / 15	15	1/2	3/4	5.9	2.6	1	30.23
34401	12 / 20	15	3/4	3/4	6.1	2.6	1	30.23
34402	15	18	1/2	3/4	5.9	2.6	1	32.73
34403	15 / 20	18	3/4	3/4	6.1	2.6	1	32.73
34404	20	22	3/4	1	6.3	2.7	1	34.03
34405	20 / 25	22	1	1	6.6	2.8	1	34.03
34406	25	28	1	1 1/4	7.1	3.1	1	56.73
34407	32	35	1 1/4	1 1/2	7.7	3.2	1	73.77
34408	40	42	1 1/2	1 3/4	8.2	3.3	1	84.93
34409	50	54	2	2 3/8	9.5	3.7	1	147.56

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Conical-sealing
- Marked in yellow
- Seal ring made of HNBR, yellow
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34158	20	22	1 1/8	4.2	1.6		1	28.25
34161	20	22	1 3/8	4	1.9	5	1	28.25
34159	25	28	1 3/8	4.5	1.7	5	1	36.73

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel and plain end (gas)



Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Conical-sealing
- Marked in yellow
- Union nut with hole for sealing
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------



Art. no.	DN	d, ø [mm]	G ["]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
34214	25	28	1 3/8	12.8	2.4	1	34.09

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (gas)

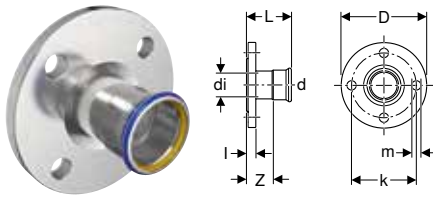

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
34204	25 / 20	22	19	11.5	85	14	6.1	1.8	4	4	10 / 16		1	86.06
34205	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	105.32
34206	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	148.55
34207	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	174.27
34208	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	214.96
34209	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	353.30
34210	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	418.78
34211	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	496.76

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Stainless Steel flange PN 10/16, with plain end

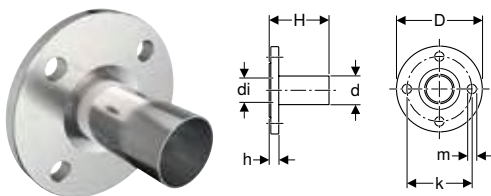

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	69.98
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	85.56
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	120.83
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	141.74
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	75	1	249.95
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	286.15
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	334.96
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	401.30


Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, gas
Adaptors and connections, detachable

Geberit Mapress Stainless Steel flange PN 10/16, with plain end (gas)

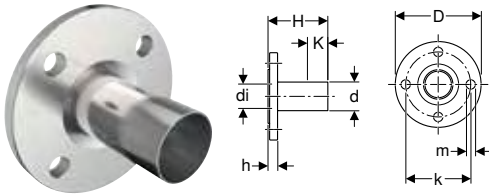

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Marked in yellow
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	K [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
34212	25	28	25	11.5	85	14	15	1.8	6.9	4	10 / 16	1	107.52

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16

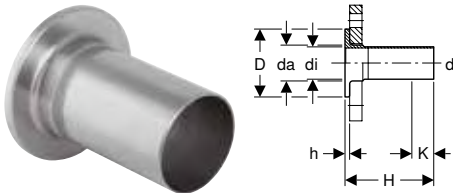

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	84.57
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	103.14
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	148.97
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	173.26
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16	160	1	214.50
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16		75	338.27
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16		75	396.03
36148	100	108	110	104	15.8	13.5	1	0	10 / 16		75	474.39

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 112



Sealings

Geberit Mapress Stainless Steel cap (gas)



Application purposes

- For natural and liquefied gases
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34462	12	15	2.3	0.3		1	14.05
34463	15	18	2.3	0.3		1	16.93
34464	20	22	2.4	0.3	5	1	17.68
34465	25	28	2.6	0.3		1	22.02
34466	32	35	2.9	0.3		1	30.79
34467	40	42	3.3	0.3		1	66.99
34468	50	54	3.8	0.3		1	73.71
34469	65	76.1	6	0.7		1	86.64
34470	80	88.9	6.7	0.7		1	96.19
34471	100	108	8.2	0.7		1	107.06

Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm										
34136	12	15	1/2	5	1.3	1.5	3		1	29.98
34137	15	18	1/2	5	1.3	1.5	3	5	1	32.37
L1 / length: 4.7 cm										
34139	20	22	1/2	5.4	1.7	1.6	2.9		1	42.09
L1 / length: 5.1 cm										
34138	20	22	3/4	5.4	1.7	1.6	3.3	10	1	46.35

Geberit Mapress Stainless Steel elbow tap connector 90°, offset, circular hole 50 mm (gas)



Application purposes

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points for circular hole ø 50 mm
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 6.5 cm										
91097	20	22	3/4	5.8	3	1.8	3.7		1	41.90
91099	20 / 25	22	1	5.8	3	1.9	3.7	5	1	28.93
91098	25 / 20	28	3/4	6.1	3	1.8	3.8	5	1	43.66
91100	25	28	1	6.1	3	1.9	3.8	5	1	30.17

Accessories

- Geberit Mapress mounting bracket for gas metre → p. 64

Geberit Mapress mounting bracket for gas metre

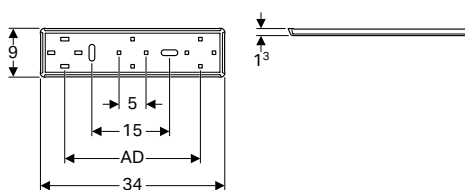

Application purposes

- For one- and two-pipe gas metres

Characteristics

- Connecting distance adjustable by ±3 mm at the gas metre
- Zinc-plated
- Circular hole ø 50 mm

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Fastening material


Art. no.	AD [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
91096	25	10	1	25.03



Geberit Mapress Stainless Steel, silicone-free

System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo

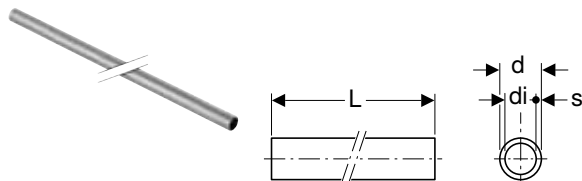

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
39002	12	15	13	1	6	840	120		13.73
39003	15	18	16	1	6	420	60		16.20
39004	20	22	19.6	1.2	6	420	60		21.91
39005	25	28	25.6	1.2	6	180	60		27.01
39006	32	35	32	1.5	6	180	30		39.80
39007	40	42	39	1.5	6	180	30		48.94
39008	50	54	51	1.5	6	180	30		62.29
39009	65	76.1	72.1	2	6	144		6	126.23
39010	80	88.9	84.9	2	6	96		6	143.82
39011	100	108	104	2	6	78		6	173.21

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Couplings

Geberit Mapress Stainless Steel coupling (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
82002	12	15	4.8	0.8	10	1	8.17
82003	15	18	4.8	0.8	25	1	8.74
82004	20	22	5	0.8	25	1	10.23
82005	25	28	5.4	0.8	25	1	11.55
82006	32	35	6.2	1	10	1	14.33
82007	40	42	7.1	1.1	10	1	19.56
82008	50	54	8.3	1.3	25	1	23.46
82009	65	76.1	12.7	2.1		1	116.16
82010	80	88.9	14.5	2.5		1	132.73
82011	100	108	17.4	2.6		1	168.66

Geberit Mapress Stainless Steel slip coupling (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
82102	12	15	2.5	8	3	1	13.51
82103	15	18	2.5	8	3	1	14.05
82104	20	22	2.5	8.4	3.4	1	16.04
82105	25	28	3	9.1	3.1	1	18.55
82106	32	35	3	10.2	4.2	1	20.75
82107	40	42	4	12	4	1	24.15
82108	50	54	4	14	6	1	30.80
82109	65	76.1	6	23	11	1	171.54
82110	80	88.9	7	26	12	1	193.64
82111	100	108	8	31	15	1	232.35

Reducers

Geberit Mapress Stainless Steel reducer with plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
82303	15 / 12	18	15	5.5	3.5		1	9.65
82305	20 / 12	22	15	5.9	3.9		1	10.67
82306	20 / 15	22	18	5.7	3.7	5	1	10.67
82307	25 / 12	28	15	6.6	4.6		1	12.16
82308	25 / 15	28	18	6.4	4.4		1	12.16
82309	25 / 20	28	22	6	3.9	5	1	12.16
82310	32 / 12	35	15	7.5	5.5		1	19.15
82311	32 / 15	35	18	7.4	5.4		1	19.15
82312	32 / 20	35	22	7.1	5		1	19.15
82313	32 / 25	35	28	6.8	4.5		1	19.15
82314	40 / 12	42	15	8.1	6.1		1	34.78
82315	40 / 15	42	18	8	6		1	34.78
82316	40 / 20	42	22	8.2	6.1		1	34.78
82317	40 / 25	42	28	8.3	6		1	34.78
82318	40 / 32	42	35	7.7	5.1		1	34.78
82319	50 / 12	54	15	9.7	7.7		1	48.72
82320	50 / 15	54	18	9.6	7.6		1	48.72
82321	50 / 20	54	22	9.5	7.4		1	48.72
82322	50 / 25	54	28	11	8.7	5	1	48.72
82323	50 / 32	54	35	10.6	8		1	48.72




Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
82324	50 / 40	54	42	9.2	6.2		1	48.72
82331	65 / 50	76.1	54	14.6	11.1		1	110.34
82338	80 / 50	88.9	54	16.2	12.8		1	118.93
82339	80 / 65	88.9	76.1	16.1	10.8		1	118.93
82345	100 / 50	108	54	17.2	13.7		1	125.22
82346	100 / 65	108	76.1	18.4	13.1		1	125.22
82348	100 / 80	108	88.9	20.3	14.3		1	125.22

- i** • Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2022 to April 2023' overview

Bends

Geberit Mapress Stainless Steel bend (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
80602	12	15	2.8	0.8			5	1	13.20
80603	15	18	2.9	0.9			5	1	14.83
80604	20	22	3.2	1.1			5	1	18.03
80605	25	28	3.7	1.4	1440	10		1	22.81
82606	32	35	4.3	1.7			5	1	32.14
82607	40	42	5.1	2.1				1	50.45
82608	50	54	6.2	2.7		10		1	69.57
82609	65	76.1	10.3	5				1	188.42
82610	80	88.9	11.7	5.7				1	226.15
82611	100	108	14.3	6.8				1	309.92
arc / angle: 90°									
80102	12	15	4.9	2.9		50		1	13.20
80103	15	18	5.3	3.3		50		1	14.83
80104	20	22	6.1	4	2500	50		1	18.03
80105	25	28	5.7	3.4	1600	50		1	22.81
81106	32	35	6.8	4.2	1600	50		1	32.14
81107	40	42	8	5		15		1	50.45
81108	50	54	10	6.5	480	30		1	69.57
81109	65	76.1	15.9	10.6				1	188.42
81110	80	88.9	18.5	12.5				1	226.15
81111	100	108	23	15.5				1	309.92

- i** • Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview

Geberit Mapress Stainless Steel bend with plain end (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
80702	12	15	2.8	3.6	0.8		5	1	13.20
80703	15	18	2.9	3.6	0.9		5	1	14.83
80704	20	22	3.2	3.9	1.1		5	1	18.03
80705	25	28	3.7	4.4	1.4	10		1	22.81
82706	32	35	4.3	5	1.7		5	1	32.14
82707	40	42	5.1	5.9	2.1			1	50.45
82708	50	54	6.2	7	2.7		5	1	69.57
82709	65	76.1	10.3	11.1	5			1	188.42
82710	80	88.9	11.7	12.8	5.7			1	226.15
82711	100	108	14.3	15.8	6.8			1	309.92
arc / angle: 90°									
80302	12	15	4.9	5.9	2.9	10		1	13.20
80303	15	18	5.3	6.1	3.3	25		1	14.83
80304	20	22	6.1	7	4	25		1	18.03
80305	25	28	5.7	6.3	3.4	25		1	22.81
83306	32	35	6.8	7.4	4.2	10		1	32.14
83307	40	42	8	8.8	5		5	1	50.45
83308	50	54	10	10.8	6.5	25		1	69.57
83309	65	76.1	15.9	16.7	10.6			1	188.42
83310	80	88.9	18.5	19.5	12.5			1	226.15
83311	100	108	23	24.1	15.5			1	309.92




- Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview



T-pieces

Geberit Mapress Stainless Steel T-piece, equal (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81002	12	15	6.4	3.9	3.2	1.2	1.9	10		1	18.90
81003	15	18	6.8	4.1	3.4	1.4	2.1	10		1	21.51
81004	20	22	7.4	4.4	3.7	1.6	2.3	10		1	23.13
81005	25	28	8.4	5	4.2	1.9	2.7	10		1	27.17
81006	32	35	10	5.7	5	2.4	3.1	10		1	34.30
81007	40	42	11.4	6.5	5.7	2.7	3.5		5	1	48.73
81008	50	54	13.8	7.7	6.9	3.4	4.2	10		1	58.23
81009	65	76.1	23	11	11.5	6.2	5.7			1	320.72
81010	80	88.9	26	12.7	13	7	6.7			1	350.90
81011	100	108	31	15.3	15.5	8	7.8			1	433.11

Geberit Mapress Stainless Steel T-piece, reduced (silicone-free)

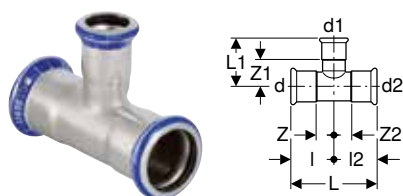

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81204	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4		1	19.48
81206	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	20.88
81207	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	20.88
81209	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9		1	25.20
81210	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	5	1	25.20
81211	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9		1	25.20
81212	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4		1	30.77
81213	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4		1	31.29
81214	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4		1	31.29
81215	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4		1	31.29
81216	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	45.21
81217	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		1	45.21
81218	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7		1	45.21
81219	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5	1	45.21
81220	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7		1	45.21
81221	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4		1	52.20
81222	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4		1	52.20
81223	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4		1	52.20
81224	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4		1	52.20
81225	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4		1	52.20
81226	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4		1	52.20
81229	65 / 20 / 65	76.1	22	76.1	23	7.2	11.5	11.5	6.2	5.1	6.2		1	271.39
81230	65 / 25 / 65	76.1	28	76.1	23	7.5	11.5	11.5	6.2	5.2	6.2		1	271.39
81231	65 / 32 / 65	76.1	35	76.1	23	7.9	11.5	11.5	6.2	5.3	6.2		1	271.39
81232	65 / 40 / 65	76.1	42	76.1	23	8.3	11.5	11.5	6.2	5.3	6.2		1	271.39
81233	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2		1	271.39
81236	80 / 20 / 80	88.9	22	88.9	26	7.8	13	13	7	5.7	7		1	295.71
81237	80 / 25 / 80	88.9	28	88.9	26	8.1	13	13	7	5.8	7		1	295.71
81238	80 / 32 / 80	88.9	35	88.9	26	8.5	13	13	7	5.9	7		1	295.71
81239	80 / 40 / 80	88.9	42	88.9	26	8.9	13	13	7	5.9	7		1	295.71
81240	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7		1	295.71
81241	80 / 65 / 80	88.9	76.1	88.9	26	11.6	13	13	7	6.3	7		1	295.71
81244	100 / 20 / 100	108	22	108	31	8.8	15.5	15.5	8	6.7	8		1	347.93
81245	100 / 25 / 100	108	28	108	31	9.1	15.5	15.5	8	6.8	8		1	347.93
81246	100 / 32 / 100	108	35	108	31	9.5	15.5	15.5	8	6.9	8		1	347.93
81247	100 / 40 / 100	108	42	108	31	9.9	15.5	15.5	8	6.9	8		1	347.93
81248	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8		1	347.93
81249	100 / 65 / 100	108	76.1	108	31	12.6	15.5	15.5	8	7.3	8		1	347.93
81250	100 / 80 / 100	108	88.9	108	31	13.7	15.5	15.5	8	7.7	8		1	347.93



Geberit Mapress Stainless Steel T-piece with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	d1, ø [mm]	L [cm]	l [cm]	l1 [cm]	H [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
81454	12 / 15 / 12	15	1/2	15	6.4	3.2	3.2	3.4	1.2	1.2	1	20.88
81455	15	18	1/2	18	6.8	3.4	3.4	3.6	1.4	1.4	1	20.88
81458	20	22	3/4	22	7.4	3.7	3.7	4.2	1.6	1.6	1	24.32
81461	25	28	1	28	8.4	4.2	4.2	4.8	1.9	1.9	1	27.78

Geberit Mapress Stainless Steel T-piece with female thread (silicone-free)

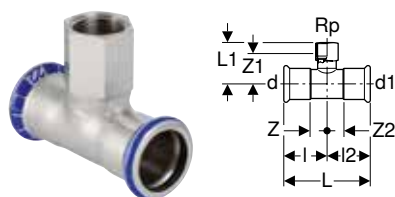

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81304	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2			1	20.88
81305	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4			1	20.88
81306	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4			1	20.88
81307	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6		5	1	24.32
81308	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6			1	24.32
81309	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	10		1	27.78
81310	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9		5	1	27.78
81311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9			1	27.78
81312	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4		5	1	33.05
81313	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4			1	33.05
81316	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7			1	37.40
81317	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7			1	37.40
81320	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	10		1	46.95
81321	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4			1	46.95
81324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4			1	46.95
81326	65 / 20 / 65	76.1	3/4	76.1	23	7.4	11.5	11.5	6.2	5.9	6.2			1	278.33
81331	80 / 20 / 80	88.9	3/4	88.9	26	8	13	13	7	6.5	7			1	295.71
81334	80 / 50 / 80	88.9	2	88.9	26	9.7	13	13	7	7.4	7			1	295.71
81336	100 / 20 / 100	108	3/4	108	31	9	15.5	15.5	8	7.5	8			1	347.93
81339	100 / 50 / 100	108	2	108	31	10.7	15.5	15.5	8	8.4	8			1	347.93

Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81726	12 / 10	15	3/8	3.8	1.8			1	15.63
81703	12 / 15	15	1/2	4.1	2.1	10		1	15.63
81714	12 / 20	15	3/4	4.3	2.3			1	15.63
81704	15	18	1/2	4.2	2.2	25		1	17.38
81705	15 / 20	18	3/4	4.4	2.4			1	17.38
81715	20 / 15	22	1/2	4.2	2.1		5	1	19.15
81707	20	22	3/4	4.4	2.3	25		1	19.15
81716	20 / 25	22	1	4.6	2.5			1	19.15
81717	25 / 20	28	3/4	4.6	2.3		5	1	24.32
81708	25	28	1	4.8	2.3	25		1	24.32
81718	25 / 32	28	1 1/4	4.8	2.5			1	24.32
81719	32 / 25	35	1	5.1	2.5			1	34.78
81709	32	35	1 1/4	5.3	2.7	10		1	34.78
81720	32 / 40	35	1 1/2	5.3	2.7			1	34.78
81721	40 / 32	42	1 1/4	5.7	2.7			1	51.47
81710	40	42	1 1/2	5.7	2.7	10		1	51.47
81722	50 / 40	54	1 1/2	8.3	4.8			1	69.57
81711	50	54	2	8.9	5.4	25		1	69.57
81713	65	76.1	2 1/2	12.3	7			1	316.27
81724	80	88.9	3	13.7	7.7			1	474.60

Geberit Mapress Stainless Steel adaptor with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81802	12 / 15	15	1/2	3.7	0.4		5	1	15.63
81823	12 / 20	15	3/4	3.8	0.3			1	15.63
81803	15	18	1/2	3.7	0.4	10		1	17.38
81804	15 / 20	18	3/4	3.8	0.3			1	17.38
81805	20 / 15	22	1/2	3.6	0.2		5	1	19.15
81806	20	22	3/4	3.9	0.3		5	1	19.15
81824	20 / 25	22	1	4.2	0.4			1	19.15
81807	25 / 15	28	1/2	3.8	0.2		5	1	24.32
81819	25 / 20	28	3/4	3.9	0.3		5	1	24.32
81809	25	28	1	4.4	0.4	10		1	24.32



Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
81825	25 / 32	28	1 1/4	4.6	0.4			1	24.32
81820	32 / 25	35	1	4.5	0.2			1	34.78
81811	32	35	1 1/4	4.9	0.4			1	34.78
81826	32 / 40	35	1 1/2	4.9	0.4			1	34.78
81821	40 / 32	42	1 1/4	5.1	0.2			1	51.47
81814	40	42	1 1/2	5.3	0.4		5	1	51.47
81822	50 / 40	54	1 1/2	7.1	2.2			1	69.57
81818	50	54	2	6.2	0.4		5	1	69.57

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
83833	12 / 15	15	1/2	5.7	3.7	3.7	1	22.62
83834	15	18	1/2	5.7	3.9	3.7	1	24.32
83835	20	22	3/4	6	4.6	3.9	1	31.29
83836	25	28	1	6.7	5.4	4.4	1	40.01
83837	32	35	1 1/4	7.5	6.3	4.9	1	55.68
83838	40	42	1 1/2	8.3	6.7	5.3	1	97.88
83839	50	54	2	9.4	7.8	5.9	1	124.76

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (silicone-free)

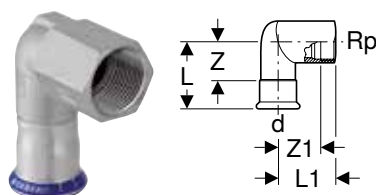

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
83803	12 / 15	15	1/2	5.7	3.7	3.7	2.4	1	22.29
83804	15	18	1/2	5.7	3.9	3.7	2.6	1	27.21
83805	20	22	3/4	6	4.6	3.9	3.1	1	31.29
83806	25	28	1	6.7	5.4	4.3	3.7	1	40.01
83807	32	35	1 1/4	7.5	6.3	4.9	4.4	1	55.68

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit Mapress Stainless Steel union (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85320	12	15	3/4	6.6	2.6		1	53.50
85321	15	18	3/4	6.9	2.9		1	60.69
85322	20	22	1	7.2	3		1	75.17
85323	25	28	1 1/4	7.7	3.1		1	115.45
85324	32	35	1 1/2	8.2	3		1	121.09
85325	40	42	1 3/4	9.5	3.5		1	174.47
85326	50	54	2 3/8	11.3	4.3	5	1	289.74

Geberit Mapress Stainless Steel adaptor union with male thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85330	12 / 15	15	1/2	3/4	6.4	4.4		5	1	27.78
85332	15	18	1/2	3/4	6.4	4.4	10		1	30.05
85333	15 / 20	18	3/4	3/4	6.6	4.6			1	30.05
85334	20 / 15	22	1/2	1	6.7	4.6			1	31.29
85335	20	22	3/4	1	6.8	4.7	10		1	31.29
85337	25	28	1	1 1/4	7.8	5.5		5	1	52.20
85338	32	35	1 1/4	1 1/2	8.5	5.9	10		1	67.85
85339	40	42	1 1/2	1 3/4	9	6	10		1	78.11
85340	50	54	2	2 3/8	10.3	6.8	10		1	135.67



Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85360	12 / 15	15	1/2	3/4	6.4	4.4		1	36.51
85362	15	18	1/2	3/4	6.4	4.4		1	41.75
85365	20	22	3/4	1	6.8	4.7		1	43.47
85367	25	28	1	1 1/4	7.8	5.5	5	1	66.10
85368	32	35	1 1/4	1 1/2	8.5	5.9		1	88.33
85369	40	42	1 1/2	1 3/4	9	6		1	102.22
85370	50	54	2	2 3/8	10.3	6.8		1	176.63

Geberit Mapress Stainless Steel adaptor union with male thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	R ["]	G ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35400	12 / 15	15	1/2	3/4	8.6		1	34.78
35402	15	18	1/2	3/4	8.6		1	39.74
35405	20	22	3/4	1	9.2		1	41.40
35407	25	28	1	1 1/4	10.1	5	1	62.93
35408	32	35	1 1/4	1 1/2	10.9		1	84.14
35409	40	42	1 1/2	1 3/4	11.5		1	97.34
35410	50	54	2	2 3/8	12.9		1	168.23

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free
Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor union with female thread (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
85300	12 / 15	15	1/2	3/4	5.9	2.6		1	27.78
85301	12 / 20	15	3/4	3/4	6.1	2.6		1	27.78
85302	15	18	1/2	3/4	5.9	2.6		1	30.05
85303	15 / 20	18	3/4	3/4	6.1	2.6		1	30.05
85304	20	22	3/4	1	6.3	2.7		1	31.29
85305	20 / 25	22	1	1	6.6	2.8		1	31.29
85306	25	28	1	1 1/4	7.1	3.1	5	1	52.20
85307	32	35	1 1/4	1 1/2	7.7	3.2		1	67.85
85308	40	42	1 1/2	1 3/4	8.2	3.3		1	78.11
85309	50	54	2	2 3/8	9.5	3.7		1	135.67

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM


Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85350	12 / 15	15	1/2	3/4	5.9	2.6	1	36.51
85351	15	18	1/2	3/4	5.9	2.6	1	41.75
85358	15 / 20	18	3/4	3/4	6.1	2.6	1	41.75
85352	20	22	3/4	1	6.3	2.7	1	43.47
85359	20 / 25	22	1	1	6.6	2.8	1	43.47
85353	25	28	1	1 1/4	7.1	3.1	1	66.10
85354	32	35	1 1/4	1 1/2	7.7	3.2	1	88.33
85355	40	42	1 1/2	1 3/4	8.2	3.3	1	102.22
85356	50	54	2	2 3/8	9.5	3.7	1	176.63



Geberit Mapress Stainless Steel adaptor union with female thread and plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Silicone-free (LABS-free)
- Union nut made of brass
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
35380	12 / 15	15	1/2	3/4	8.1	5.9		1	34.78
35382	15	18	1/2	3/4	8.1	5.9		1	39.74
35384	20	22	3/4	1	8.7	6.4		1	41.40
35386	25	28	1	1 1/4	9.4	6.7		1	62.93
35387	32	35	1 1/4	1 1/2	10.1	7.2		1	84.14
35388	40	42	1 1/2	1 3/4	10.7	7.7	5	1	97.34
35389	50	54	2	2 3/8	12	8.4		1	168.23

Geberit Mapress Stainless Steel adaptor with union nut (silicone-free)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85042	12	15	1/2	10	5.1	2.5	1	24.32
85032	12	15	3/4	13	3.7	1.1	1	19.15
85072	12	15	1 1/4	26	4.3	1.3	1	19.15
85033	15	18	3/4	13	3.7	1.1	1	19.98
85034	20	22	1	20	4	1.1	1	27.78
85044	20	22	1 1/4	26	4.3	1.3	1	27.78
85045	20	22	1 1/2	32	4.4	1.3	1	27.78
85046	25	28	1	20	5.5	2.4	1	36.51
85035	25	28	1 1/4	26	4.4	1.3	1	36.51
85047	25	28	1 1/2	32	4.6	1.3	1	36.51
85036	32	35	1 1/2	32	4.8	1.3	1	40.01
85037	40	42	1 3/4	39	5.2	1.3	1	53.27
85038	50	54	2 3/8	51	5.8	1.5	1	71.88

Geberit Mapress Stainless Steel

Geberit Mapress Stainless Steel, silicone-free
Adaptors and connections, detachable

Geberit Mapress Stainless Steel adaptor with union nut made of CrNi steel (silicone-free)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Flat gasket made of EPDM

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
85132	12	15	3/4	13	3.7	1.1	1	24.66
85134	20	22	1	20	4	1.1	1	30.79
85075	25	28	1 1/2	32	4.8	1.3	1	70.26

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (silicone-free)

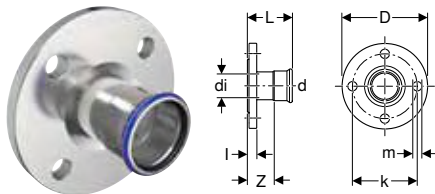

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
83712	15 / 12	15	15	9.5	65	14	6.1	1.6	4.1	4	10 / 16		1	63.46
83713	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16		1	65.24
83714	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16		1	77.13
83715	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	94.33
83716	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	133.18
83717	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	156.26
83718	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	192.65
83719	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	304.42
83720	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	361.75
83721	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	429.39

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112



Geberit Mapress Stainless Steel flange PN 10/16, with plain end

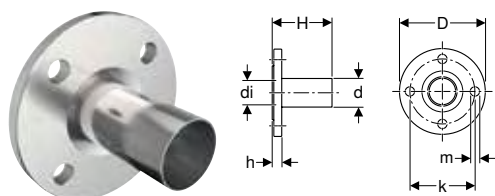

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	69.98
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	85.56
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	120.83
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	141.74
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	75	1	249.95
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	286.15
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	334.96
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	401.30

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6

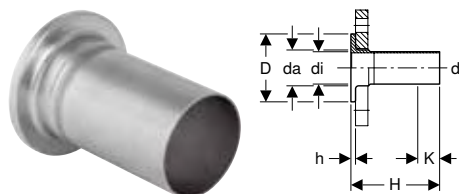

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	3.7	6		1	90.93
36151	32	35	40	32	7	13.5	0.6	2.7	6		1	130.89
36152	40	42	47	39	8	13.5	0.6	0	6		1	152.75
36153	50	54	59	51	9	13.5	0.8	0	6		1	189.11
36154	65	76.1	78	73.1	11	13.5	0.8	0	6		1	298.19
36155	80	88.9	91	84.9	12.8	13.5	1	0	6	96	1	349.11
36156	100	108	110	104	14.8	13.5	1	0	6	75	1	418.24


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 111

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	84.57
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	103.14
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	148.97
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	173.26
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16	160	1	214.50
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	75	1	338.27
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	75	1	396.03
36148	100	108	110	104	15.8	13.5	1	0	10 / 16	75	1	474.39

To order additionally


- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 112

Sealings

Geberit Mapress Stainless Steel cap (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
83212	12	15	2.3	0.3	1	13.67
83213	15	18	2.3	0.3	1	16.43
83214	20	22	2.4	0.3	1	17.71
83215	25	28	2.6	0.3	1	21.37
83216	32	35	2.9	0.3	1	29.83
83217	40	42	3.3	0.3	1	64.94
83218	50	54	3.8	0.3	1	71.45



Connections

Geberit Mapress Stainless Steel elbow tap connector 90° (silicone-free)



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm										
83403	12 / 15	15	1/2	5	1.3	1.5	3	5	1	26.85
83405	15	18	1/2	5	1.3	1.5	3		1	28.97
L1 / length: 5.1 cm										
83407	20	22	3/4	5.4	1.7	1.6	3.3		1	41.55

Geberit Mapress Stainless Steel T-elbow tap connector 90°, offset (silicone-free)

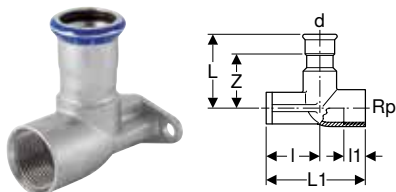

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Leaky if unpressed
- Two fastening points
- Seal ring made of CIIR, black


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L1 / length: 6.5 cm									
83423	12 / 15	15	1/2	5	3.5	1.5	3	1	26.64
83425	15	18	1/2	5	3.5	1.5	3	1	28.72
83427	20	22	3/4	5.4	3.1	1.6	3.3	1	41.22

Compensators

Geberit Mapress Stainless Steel axial expansion fitting with pressing sockets



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water and process water
- For treated water
- For rainwater with a pH value of > 6.0
- For grey and black water with pH value > 6.0
- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Leaky if unpressed
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Maximum operating pressure	16 bar
Operating temperature	$-30 - +120\text{ }^{\circ}\text{C}$
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	d, \varnothing [mm]	D [cm]	La [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
33932	12	15	2.6	+/- 7	15.1		1	133.46
33933	15	18	2.6	+/- 7	14.7		1	140.95
33934	20	22	3.1	+/- 11	10.6		1	162.79
33935	25	28	3.9	+/- 13	12		1	175.81
33936	32	35	4.6	+/- 13	13.9	5	1	197.62
33937	40	42	5.9	+/- 13	14.9		1	354.99
33938	50	54	7	+/- 18	17.6		1	404.44
33939	65	76.1	8.8	+/- 22	26.2		1	502.70
33940	80	88.9	11.7	+/- 23	28.6		1	565.24
33941	100	108	14.4	+/- 23	54.2		1	1148.32

Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media \rightarrow p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media \rightarrow p. 13

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, \varnothing [mm]	D [cm]	L [cm]	l [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	69.62
90981	15	18	3	45	16.5		1	71.32
90982	20	22	3.4	45	16.5	5	1	74.82
90983	25	28	3.8	45	16.5	5	1	81.77
90984	32	35	4.5	45	16.5	5	1	99.16
90985	40	42	5.4	45	16.5	5	1	118.30
90986	50	54	7	45	16.5	5	1	130.50
90987	65	76.1	8.9	45	16.5		1	295.73
90988	80	88.9	10.8	45	16.5		1	330.57
90989	100	108	13.3	45	16.5		1	365.36



Geberit Mapress Stainless Steel, FKM, blue

System pipes 1.4401

Geberit Mapress Stainless Steel system pipe CrNiMo

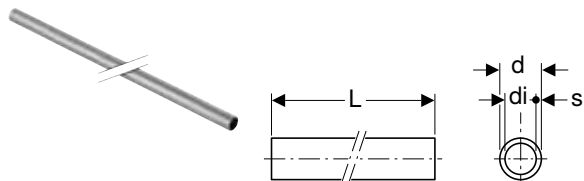

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Pipe end with blue protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.0165 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
39002	12	15	13	1	6	840	120		13.73
39003	15	18	16	1	6	420	60		16.20
39004	20	22	19.6	1.2	6	420	60		21.91
39005	25	28	25.6	1.2	6	180	60		27.01
39006	32	35	32	1.5	6	180	30		39.80
39007	40	42	39	1.5	6	180	30		48.94
39008	50	54	51	1.5	6	180	30		62.29
39009	65	76.1	72.1	2	6	144		6	126.23
39010	80	88.9	84.9	2	6	96		6	143.82
39011	100	108	104	2	6	78		6	173.21

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

System pipes 1.4301

Geberit Mapress Stainless Steel system pipe CrNi

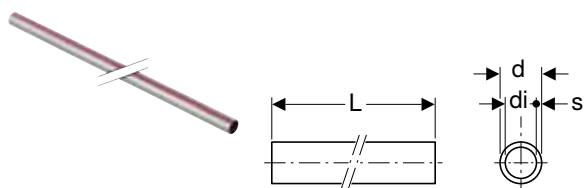

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
Surface roughness	1.5 µm
Thermal expansion	0.016 mm/(m·K)
Thermal conductivity, pipe	15 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
39102	12	15	13	1	6	840	120		11.60
39103	15	18	16	1	6	420	60		13.79
39104	20	22	19.6	1.2	6	420	60		18.54
39105	25	28	25.6	1.2	6	420	60		22.87
39106	32	35	32	1.5	6	180	30		34.09
39107	40	42	39	1.5	6	180	30		41.83
39108	50	54	51	1.5	6	180	30		52.80
39609	65	76.1	73.1	1.5	6	144		6	70.10
39610	80	88.9	85.9	1.5	6	96		6	80.26
39611	100	108	104	2	6	78		6	96.47

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Pipe nipples

Geberit Mapress Stainless Steel pipe nipple



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
32050	12	15	13	1	5		1	3.98
32051	15	18	16	1	5	5	1	4.31
32052	20	22	19.6	1.2	5.2	5	1	4.60
32053	25	28	25.6	1.2	5.6	5	1	5.87
32054	32	35	32	1.5	6.2		1	7.53
32055	40	42	39	1.5	8		1	10.67
32056	50	54	51	1.5	9		1	13.83
32057	65	76.1	72.1	2	13.6		1	56.98
32058	80	88.9	84.9	2	15		1	66.43
32059	100	108	104	2	18		1	92.98



Couplings

Geberit Mapress Stainless Steel coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50062	12	15	4.8	0.8	5	1	10.57
50063	15	18	4.8	0.8	5	1	11.85
50064	20	22	5	0.8	5	1	14.20
50065	25	28	5.4	0.8	5	1	16.18
50066	32	35	6.2	1	5	1	20.18
50067	40	42	7.1	1.1	5	1	28.10
50068	50	54	8.3	1.3	5	1	37.43
50071	65	76.1	12.7	2.1		1	152.89
50072	80	88.9	14.5	2.5		1	175.19
50073	100	108	17.6	2.6		1	251.88

Geberit Mapress Stainless Steel slip coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50082	12	15	2.5	8	3	5	1	16.05
50083	15	18	2.5	8	3	5	1	17.15
50084	20	22	2.5	8.4	3.4	5	1	20.04
50085	25	28	3	9.1	3.1	5	1	23.17
50086	32	35	3	10.2	4.2	5	1	26.66
50087	40	42	4	12	4	5	1	32.61
50088	50	54	4	14	6	5	1	44.60
50091	65	76.1	6	23	11		1	207.27
50092	80	88.9	7	26	12		1	235.71
50093	100	108	8	31	15		1	315.53

Reducers

Geberit Mapress Stainless Steel reducer with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Concentric
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50133	15 / 12	18	15	5.5	3.5	5	1	10.66
50134	20 / 12	22	15	5.9	3.9	5	1	11.48
50135	20 / 15	22	18	5.7	3.7	5	1	11.48
50136	25 / 12	28	15	6.6	4.6	5	1	13.32
50137	25 / 15	28	18	6.4	4.4	5	1	13.32
50138	25 / 20	28	22	6	3.9	5	1	13.32
50141	32 / 20	35	22	7.1	5	5	1	21.75
50142	32 / 25	35	28	6.8	4.5	5	1	21.75
50145	40 / 20	42	22	8.2	6.1		1	39.26
50146	40 / 25	42	28	8.3	6		1	39.26
50147	40 / 32	42	35	7.7	5.1	5	1	39.26
50150	50 / 20	54	22	9.5	7.4		1	55.14
50151	50 / 25	54	28	11	8.7		1	55.14
50152	50 / 32	54	35	10.6	8		1	55.14
50153	50 / 40	54	42	9.2	6.2	5	1	55.14
50164	65 / 50	76.1	54	14.6	11.1		1	123.13
50167	80 / 50	88.9	54	16.2	12.8		1	129.89
50168	80 / 65	88.9	76.1	16.1	10.8		1	129.89
50169	100 / 50	108	54	17.2	13.7		1	144.49
50171	100 / 65	108	76.1	18.4	13.1		1	144.49
50172	100 / 80	108	88.9	20.3	14.3		1	144.49




- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2022 to April 2023' overview



Bends

Geberit Mapress Stainless Steel bend (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°							
50222	12	15	2.8	0.8	5	1	14.73
50223	15	18	2.9	0.9	5	1	16.68
50224	20	22	3.2	1.1	5	1	20.58
50225	25	28	3.7	1.4	5	1	25.57
50226	32	35	4.3	1.7	5	1	39.07
50227	40	42	5.1	2.1	5	1	60.32
50228	50	54	6.2	2.7	5	1	82.34
50231	65	76.1	10.3	5		1	210.62
50232	80	88.9	11.7	5.7		1	263.74
50233	100	108	14.3	6.8		1	388.37
arc / angle: 90°							
50282	12	15	4.9	2.9	5	1	14.73
50283	15	18	5.3	3.3	5	1	16.68
50284	20	22	6.1	4	5	1	20.58
50285	25	28	5.7	3.4	5	1	25.57
50286	32	35	6.8	4.2	5	1	39.07
50287	40	42	8	5	5	1	57.46
50288	50	54	10	6.5	5	1	82.34
50291	65	76.1	15.9	10.6		1	210.62
50292	80	88.9	18.5	12.5		1	263.74
50293	100	108	23	15.5		1	388.37



- Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview

Geberit Mapress Stainless Steel bend with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
50242	12	15	2.8	3.6	0.8	5	1	14.73
50243	15	18	2.9	3.6	0.9	5	1	16.68
50244	20	22	3.2	3.9	1.1	5	1	20.58
50245	25	28	3.7	4.4	1.4	5	1	25.57
50246	32	35	4.3	5	1.7	5	1	39.07
50247	40	42	5.1	5.9	2.1	5	1	60.32
50248	50	54	6.2	7	2.7	5	1	82.34
50251	65	76.1	10.3	11.1	5		1	210.62
50252	80	88.9	11.7	12.8	5.7		1	263.74
50253	100	108	14.3	15.8	6.8		1	388.37
arc / angle: 90°								
50312	12	15	4.9	5.9	2.9	5	1	14.73
50313	15	18	5.3	6.1	3.3	5	1	16.68
50314	20	22	6.1	7	4	5	1	20.58
50315	25	28	5.7	6.3	3.4	5	1	25.57
50316	32	35	6.8	7.4	4.2	5	1	39.07
50317	40	42	8	8.8	5	5	1	57.46
50318	50	54	10	10.8	6.5	5	1	82.34
50321	65	76.1	15.9	16.7	10.6		1	210.62
50322	80	88.9	18.5	19.5	12.5		1	263.74
50323	100	108	23	24.1	15.5		1	388.37



- Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Stainless Steel – April 2023 to April 2024' overview



Geberit Mapress Stainless Steel bend with plain ends



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°											
30892	12	15	4	11	0	7				1	13.76
30893	15	18	4	11.2	0	7.1				1	14.05
30894	20	22	4.1	11.4	0	7.3				1	14.87
30905	25	28	4.3	11.9	0	7.6			5	1	15.41
30906	32	35	4.1	11.8	0	7.7				1	32.29
30907	40	42	4.7	13.7	0	9				1	39.74
30908	50	54	5.5	14.9	0	9.4				1	49.70
30009	65	76.1	8.4	20.4	0	12				1	155.70
30010	80	88.9	9.5	22	0	12.5				1	175.60
30011	100	108	11.7	25.4	0	13.7				1	210.39
arc / angle: 30°											
30932	12	15	4.3	11.3	0	7				1	13.76
30933	15	18	4.4	11.6	0	7.1				1	14.05
30934	20	22	4.6	11.8	0	7.2			5	1	14.87
30935	25	28	4.8	12.4	0	7.6			5	1	15.41
30936	32	35	4.6	12.3	0	7.7				1	32.29
30937	40	42	5.4	14.4	0	9				1	39.74
30938	50	54	6.3	15.7	0	9.4				1	49.70
30029	65	76.1	9.7	21.7	0	12				1	155.70
30030	80	88.9	11.1	23.6	0	12.5				1	175.60
30031	100	108	13.6	27.3	0	13.7				1	210.39
arc / angle: 45°											
30872	12	15	4.5	11.6	0	7.1			5	1	13.76
30873	15	18	4.2	11.7	0	7.5				1	14.05
30874	20	22	4.2	12.3	0	7.1				1	14.87
30875	25	28	5.6	13.1	0	7.5				1	15.41
30876	32	35	5.3	12.9	0	7.6				1	32.29
30877	40	42	6.1	15.1	0	9				1	39.74
30878	50	54	7.3	16.7	0	9.4				1	49.70
30049	65	76.1	11.1	23	0	11.9				1	155.70
30050	80	88.9	13	25.2	0	12.2				1	175.60
30051	100	108	15.7	29.4	0	13.7				1	210.39
arc / angle: 60°											
30942	12	15	5	12	0	7				1	13.76
30943	15	18	5.3	12.4	0	7.1				1	14.05
30944	20	22	5.6	12.8	0	7.2				1	14.87
30955	25	28	6.1	13.7	0	7.6				1	15.41
30956	32	35	5.9	13.6	0	7.7				1	32.29
30957	40	42	6.9	15.9	0	9				1	39.74
30958	50	54	8.3	17.7	0	9.4				1	49.70
30069	65	76.1	12.6	24.6	0	12				1	155.70
30070	80	88.9	14.6	27.1	0	12.5				1	175.60
30071	100	108	18	31.7	0	13.7				1	210.39
arc / angle: 90°											
30402	12	15	5.9	12.9	0	7	5600	50	10		13.76
30403	15	18	6.1	13.3	0	7.2		50	10		14.05
30404	20	22	7	14.2	0	7.2		50	10		14.87
30405	25	28	7.9	15.5	0	7.6		50	10		15.41
30406	32	35	7.7	15.4	0	7.7			5	1	32.29
30407	40	42	9	18	0	9			5	1	39.74
30408	50	54	11.1	20.5	0	9.4			5	1	49.70
30089	65	76.1	16.6	28.6	0	12				1	155.70
30090	80	88.9	19.4	31.9	0	12.5				1	175.60
30091	100	108	24	37.7	0	13.7				1	210.39

Geberit Mapress Stainless Steel pipe bridge

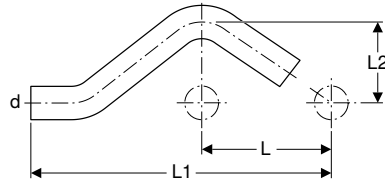

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
30802	12	15	6	16.5	3.2	25	5		11.85
30803	15	18	6	16.6	3.3	25	5		12.26
30804	20	22	6	16.8	3.5	25	5		13.91
30805	25	28	6	17.9	3.8			1	16.88

T-pieces

Geberit Mapress Stainless Steel T-piece, equal (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50332	12	15	6.4	3.9	3.2	1.2	1.9	5	1	22.62
50333	15	18	6.8	4.1	3.4	1.4	2.1	5	1	26.58
50334	20	22	7.4	4.4	3.7	1.6	2.3	5	1	29.81
50335	25	28	8.4	5	4.2	1.9	2.7	5	1	34.68
50336	32	35	10	5.7	5	2.4	3.1	5	1	44.00
50337	40	42	11.4	6.5	5.7	2.7	3.5	5	1	62.45
50338	50	54	13.8	7.7	6.9	3.4	4.2	5	1	77.56
50341	65	76.1	23	11	11.5	6.2	5.7		1	384.09
50342	80	88.9	26	12.7	13	7	6.7		1	429.41
50343	100	108	31	15.3	15.5	8	7.8		1	589.02



Geberit Mapress Stainless Steel T-piece, reduced (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50356	15 / 12 / 15	18	15	18	6.8	4.1	3.4	3.4	1.4	2.1	1.4	5	1	24.07
50357	20 / 12 / 20	22	15	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	26.87
50359	20 / 15 / 20	22	18	22	7.4	4.3	3.7	3.7	1.6	2.3	1.6	5	1	26.87
50362	25 / 12 / 25	28	15	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	5	1	32.20
50364	25 / 15 / 25	28	18	28	8.4	4.6	4.2	4.2	1.9	2.6	1.9	5	1	32.20
50366	25 / 20 / 25	28	22	28	8.4	4.7	4.2	4.2	1.9	2.6	1.9	5	1	32.20
50367	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4	5	1	39.48
50368	32 / 15 / 32	35	18	35	10	4.9	5	5	2.4	2.9	2.4	5	1	40.15
50369	32 / 20 / 32	35	22	35	10	5	5	5	2.4	2.9	2.4	5	1	40.15
50370	32 / 25 / 32	35	28	35	10	5.3	5	5	2.4	3	2.4	5	1	40.15
50371	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	5	1	57.96
50372	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	5	1	57.96
50373	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	5	1	57.96
50374	40 / 25 / 40	42	28	42	11.4	5.7	5.7	5.7	2.7	3.4	2.7	5	1	57.96
50375	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	5	1	57.96
50376	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	5	1	72.99
50377	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	5	1	72.99
50378	50 / 20 / 50	54	22	54	13.8	6	6.9	6.9	3.4	3.9	3.4	5	1	69.51
50379	50 / 25 / 50	54	28	54	13.8	6.3	6.9	6.9	3.4	4	3.4	5	1	69.51
50380	50 / 32 / 50	54	35	54	13.8	6.7	6.9	6.9	3.4	4.1	3.4	5	1	69.51
50381	50 / 40 / 50	54	42	54	13.8	7.1	6.9	6.9	3.4	4.1	3.4	5	1	69.51
50389	65 / 20 / 65	76.1	22	76.1	23	7.2	11.5	11.5	6.2	5.1	6.2	1		324.98
50390	65 / 25 / 65	76.1	28	76.1	23	7.5	11.5	11.5	6.2	5.2	6.2	1		324.98
50391	65 / 32 / 65	76.1	35	76.1	23	7.9	11.5	11.5	6.2	5.3	6.2	1		324.98
50392	65 / 40 / 65	76.1	42	76.1	23	8.3	11.5	11.5	6.2	5.3	6.2	1		324.98
50393	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2	1		324.98
50395	80 / 20 / 80	88.9	22	88.9	26	7.8	13	13	7	5.7	7	1		361.87
50396	80 / 25 / 80	88.9	28	88.9	26	8.1	13	13	7	5.8	7	1		361.87
50397	80 / 32 / 80	88.9	35	88.9	26	8.5	13	13	7	5.9	7	1		361.87
50398	80 / 40 / 80	88.9	42	88.9	26	8.9	13	13	7	5.9	7	1		361.87
50399	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7	1		361.87
50401	100 / 20 / 100	108	22	108	31	8.8	15.5	15.5	8	6.7	8	1		473.21
50402	100 / 25 / 100	108	28	108	31	9.1	15.5	15.5	8	6.8	8	1		473.21
50403	100 / 32 / 100	108	35	108	31	9.5	15.5	15.5	8	6.9	8	1		473.21
50404	100 / 40 / 100	108	42	108	31	9.9	15.5	15.5	8	6.9	8	1		473.21
50405	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8	1		473.21
50407	100 / 65 / 100	108	76.1	108	31	12.6	15.5	15.5	8	7.3	8	1		473.21
50408	100 / 80 / 100	108	88.9	108	31	13.7	15.5	15.5	8	7.7	8	1		473.21

Geberit Mapress Stainless Steel T-piece with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50413	12 / 15 / 12	15	1/2	15	6.4	4	3.2	3.2	1.2	2.7	1.2	5	1	23.37
50414	15	18	1/2	18	6.8	4.2	3.4	3.4	1.4	2.9	1.4	5	1	23.98
50415	15 / 20 / 15	18	3/4	18	6.8	4.4	3.4	3.4	1.4	2.9	1.4	5	1	23.98
50416	20 / 15 / 20	22	1/2	22	7.4	4.3	3.7	3.7	1.6	3	1.6	5	1	28.58
50417	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6	5	1	28.58
50418	25 / 15 / 25	28	1/2	28	8.4	4.6	4.2	4.2	1.9	3.3	1.9	5	1	32.88
50419	25 / 20 / 25	28	3/4	28	8.4	4.9	4.2	4.2	1.9	3.4	1.9	5	1	32.88
50420	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9	5	1	33.30
50421	32 / 15 / 32	35	1/2	35	10	5	5	5	2.4	3.7	2.4	5	1	39.34
50422	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	3.8	2.4	5	1	39.34
50424	40 / 15 / 40	42	1/2	42	11.4	5.3	5.7	5.7	2.7	4	2.7	5	1	45.82
50425	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.1	2.7	5	1	45.82
50427	50 / 15 / 50	54	1/2	54	13.8	5.9	6.9	6.9	3.4	4.6	3.4	5	1	58.55
50428	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.7	3.4	5	1	58.55
50429	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	5	1	61.49
50437	65 / 20 / 65	76.1	3/4	76.1	23	7.4	11.5	11.5	6.2	5.9	6.2		1	316.10
50438	65 / 50 / 65	76.1	2	76.1	23	9.1	11.5	11.5	6.2	6.8	6.2		1	316.10
50440	80 / 20 / 80	88.9	3/4	88.9	26	8	13	13	7	6.5	7		1	339.26
50441	80 / 50 / 80	88.9	2	88.9	26	9.7	13	13	7	7.4	7		1	339.26
50443	100 / 20 / 100	108	3/4	108	31	9	15.5	15.5	8	7.5	8		1	432.36
50444	100 / 50 / 100	108	2	108	31	10.7	15.5	15.5	8	8.4	8		1	432.36



Adaptors, permanent

Geberit Mapress Stainless Steel adaptor with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R [°]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50462	25 / 32	28	1 1/4	4.8	2.5		5	1	26.26
50472	80	88.9	3	13.7	7.7	5		1	468.38
50474	32 / 40	35	1 1/2	5.3	2.7		5	1	36.90
50453	12 / 15	15	1/2	4.1	2.1		5	1	16.93
50454	12 / 20	15	3/4	4.3	2.3		5	1	16.93
50455	15	18	1/2	4.2	2.2		5	1	18.95
50456	15 / 20	18	3/4	4.4	2.4		5	1	18.95
50457	20 / 15	22	1/2	4.2	2.1		5	1	20.97
50458	20	22	3/4	4.4	2.3		5	1	20.97
50459	20 / 25	22	1	4.6	2.5		5	1	20.97
50460	25 / 20	28	3/4	4.6	2.3		5	1	26.26
50461	25	28	1	4.8	2.3		5	1	26.26
50463	32 / 25	35	1	5.1	2.5		5	1	36.90
50464	32	35	1 1/4	5.3	2.7		5	1	36.90
50465	40 / 32	42	1 1/4	5.7	2.7		5	1	54.99
50466	40	42	1 1/2	5.7	2.7		5	1	54.99
50467	50 / 40	54	1 1/2	8.3	4.8		5	1	76.51
50468	50	54	2	8.9	5.4		5	1	76.51
50471	65	76.1	2 1/2	12.3	7			1	334.09

Geberit Mapress Stainless Steel adaptor with male thread and plain end



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R [°]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
31932	12 / 15	15	1/2	5.7	25	5		14.87
31933	15	18	1/2	5.7	25	5		16.52
31936	20	22	3/4	5.9	25	5		18.20
31937	25	28	1	6.6	25	5		23.17
31938	32	35	1 1/4	8		5	1	33.13
31939	40	42	1 1/2	9.1		5	1	49.01
31940	50	54	2	10.2		5	1	66.24

Geberit Mapress Stainless Steel adaptor with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50480	25 / 32	28	1 1/4	4.6	0.4	5	1	26.26
50484	12 / 15	15	1/2	3.7	0.4	5	1	16.93
50485	12 / 20	15	3/4	3.8	0.3	5	1	16.93
50486	15	18	1/2	3.7	0.4	5	1	18.95
50487	15 / 20	18	3/4	3.8	0.3	5	1	18.95
50488	20 / 15	22	1/2	3.6	0.2	5	1	20.97
50489	20	22	3/4	3.9	0.3	5	1	20.97
50490	20 / 25	22	1	4.2	0.4	5	1	20.97
50491	25 / 15	28	1/2	3.8	0.2	5	1	26.26
50492	25 / 20	28	3/4	3.9	0.3	5	1	26.26
50493	25	28	1	4.4	0.4	5	1	26.26
50494	32 / 25	35	1	4.5	0.2	5	1	36.90
50495	32	35	1 1/4	4.9	0.4	5	1	36.90
50498	40	42	1 1/2	5.3	0.4	5	1	54.99
50500	50	54	2	6.2	0.4	5	1	76.51

Geberit Mapress Stainless Steel adaptor with female thread and plain end



Application purposes


- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
33846	20 / 15	22	1/2	5.8	4.5	1	21.07
33848	25 / 15	28	1/2	6.6	5.3	1	27.46
33850	32 / 15	35	1/2	6.9	5.6	1	36.38
33852	40 / 15	42	1/2	7.4	6.1	1	46.61
33854	50 / 15	54	1/2	7.9	6.6	1	55.53
33860	65 / 15	76.1	1/2	10.4	9.1	1	194.05
33862	80 / 15	88.9	1/2	11.3	10	1	275.75
33864	100 / 15	108	1/2	13.4	12.1	1	332.52

Geberit Mapress Stainless Steel adaptor with female thread and plain end, long



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------



Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90932	12 / 15	15	1/2	14.8	13.5	9	5	1	14.87
90933	15	18	1/2	14.8	13.5	9	5	1	16.52
90934	15 / 20	18	3/4	15.2	13.3	9		1	16.52
90935	20 / 15	22	1/2	14.8	13.9	8.9	5	1	18.20
90936	20	22	3/4	15.2	13.7	8.7	5	1	18.20

Geberit Mapress Stainless Steel elbow adaptor 90° with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50534	40	42	1 1/2	8.3	6.7	5.3	5	1	75.92
50535	50	54	2	9.4	7.8	5.9	5	1	101.16
50524	12 / 15	15	1/2	5.7	3.7	3.7	5	1	23.91
50526	15	18	1/2	5.7	3.9	3.7	5	1	25.96
50529	20	22	3/4	6	4.6	3.9	5	1	33.36
50532	25	28	1	6.7	5.4	4.4	5	1	42.41
50533	32	35	1 1/4	7.5	6.3	4.9	5	1	56.82

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread (FKM, blue)

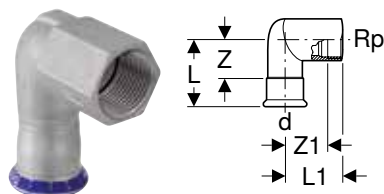

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50544	12 / 15	15	1/2	5.7	3.7	3.7	2.4	5	1	22.98
50546	15	18	1/2	5.7	3.9	3.7	2.6	5	1	29.02
50549	20	22	3/4	6	4.6	3.9	3.1	5	1	33.36
50552	25	28	1	6.7	5.4	4.3	3.7	5	1	42.41
50553	32	35	1 1/4	7.5	6.3	4.9	4.4	5	1	56.82

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Geberit Mapress Stainless Steel elbow adaptor 90° with female thread and plain end



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
33203	12 / 15	15	1/2	3.6	5.3	2.3	25	5	20.70

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit Mapress Stainless Steel union (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50772	12	15	3/4	6.6	2.6	5	1	56.01
50773	15	18	3/4	6.9	2.9	5	1	63.75
50774	20	22	1	7.2	3	5	1	79.16
50775	25	28	1 1/4	7.7	3.1	5	1	120.11
50776	32	35	1 1/2	8.2	3	5	1	126.99
50777	40	42	1 3/4	9.5	3.5	5	1	183.02
50778	50	54	2 3/8	11.3	4.3	5	1	303.71



Geberit Mapress Stainless Steel adaptor union with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50562	12 / 15	15	1/2	3/4	6.4	4.4	5	1	27.73
50564	15	18	1/2	3/4	6.4	4.4	5	1	30.07
50565	15 / 20	18	3/4	3/4	6.6	4.6	5	1	31.62
50566	20 / 15	22	1/2	1	6.7	4.6	5	1	31.71
50567	20	22	3/4	1	6.8	4.7	5	1	31.71
50568	20 / 25	22	1	1	7.3	5.2	5	1	33.30
50570	25	28	1	1 1/4	7.8	5.5	5	1	52.17
50571	32	35	1 1/4	1 1/2	8.5	5.9	5	1	67.84
50572	40	42	1 1/2	1 3/4	9	6	5	1	82.16
50573	50	54	2	2 3/8	10.3	6.8	5	1	142.01

Geberit Mapress Stainless Steel adaptor union with male thread, union nut made of CrNi steel (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50581	12 / 15	15	1/2	3/4	6.4	4.4	5	1	37.86
50582	12 / 20	15	3/4	3/4	6.6	4.6	5	1	37.86
50583	15	18	1/2	3/4	6.4	4.4	5	1	43.38
50584	15 / 20	18	3/4	3/4	6.6	4.6	5	1	43.38
50585	20 / 15	22	1/2	1	6.7	4.6	5	1	45.56
50586	20	22	3/4	1	6.8	4.7	5	1	45.56
50587	20 / 25	22	1	1	7.3	5.2	5	1	45.56
50588	25	28	1	1 1/4	7.8	5.5	5	1	68.71
50589	32	35	1 1/4	1 1/2	8.5	5.9	5	1	91.68
50590	40	42	1 1/2	1 3/4	9	6	5	1	106.54
50591	50	54	2	2 3/8	10.3	6.8	5	1	183.21

Geberit Mapress Stainless Steel adaptor union with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50611	12 / 15	15	1/2	3/4	5.9	2.6	5	1	29.14
50612	12 / 20	15	3/4	3/4	6.1	2.6	5	1	26.69
50613	15	18	1/2	3/4	5.9	2.6	5	1	31.62
50615	20	22	3/4	1	6.3	2.7	5	1	33.30
50616	20 / 25	22	1	1	6.6	2.8	5	1	33.30
50617	25	28	1	1 1/4	7.1	3.1	5	1	54.77
50618	32	35	1 1/4	1 1/2	7.7	3.2	5	1	71.21
50619	40	42	1 1/2	1 3/4	8.2	3.3	5	1	92.84
50620	50	54	2	2 3/8	9.5	3.7	5	1	154.54

Geberit Mapress Stainless Steel adaptor union with female thread, union nut made of CrNi steel (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50631	12 / 15	15	1/2	3/4	5.9	2.6	5	1	37.86
50632	12 / 20	15	3/4	3/4	6.1	2.6	5	1	37.86
50633	15	18	1/2	3/4	5.9	2.6	5	1	43.38
50634	15 / 20	18	3/4	3/4	6.1	2.6	5	1	43.38
50635	20	22	3/4	1	6.3	2.7	5	1	45.56
50636	20 / 25	22	1	1	6.6	2.8	5	1	45.56
50637	25	28	1	1 1/4	7.1	3.1	5	1	68.71
50638	32	35	1 1/4	1 1/2	7.7	3.2	5	1	91.68
50639	40	42	1 1/2	1 3/4	8.2	3.3	5	1	106.54
50640	50	54	2	2 3/8	9.5	3.7	5	1	183.21



Geberit Mapress Stainless Steel adaptor with union nut (FKM, blue)

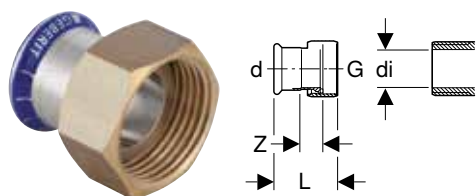

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Pressing indicator
- Silicone-free (LABS-free)
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	G ["]	di, \emptyset [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50653	12	15	3/4	13	3.7	1.1	5	1	20.42
50656	15	18	3/4	13	3.7	1.1	5	1	21.61
50661	20	22	1	20	4	1.1	5	1	29.89
50664	25	28	1	20	4	1.3	5	1	38.93
50665	25	28	1 1/4	26	4.4	1.3	5	1	38.93
50667	32	35	1 1/2	32	4.8	1.3	5	1	42.92

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes

- Suitable exclusively for liquid media

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, \emptyset [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	19.52
22431	12	20	15	6.7	5.2	10	2	22.77
22422	15	16	18	6.4	4.9	10	2	21.17
22432	15	20	18	6.7	5.2	10	2	24.42
22423	20	16	22	6.8	5.9	10	2	22.77
22433	20	20	22	6.8	5.9	10	2	26.02
22444	25	25	28	6.8	5.9	10	2	35.78



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Stainless Steel flange PN 10/16, with pressing socket (FKM, blue)

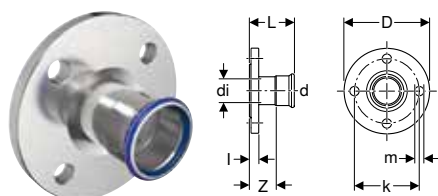

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
50673	15	18	15	9.5	65	14	6.2	1.6	4.2	4	10 / 16		1	66.78
50674	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16		1	79.15
50675	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	96.64
50676	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	136.08
50677	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	160.49
50678	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	199.55
50679	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	322.00
50680	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	382.82
50681	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	470.81

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Stainless Steel flange PN 10/16, with plain end

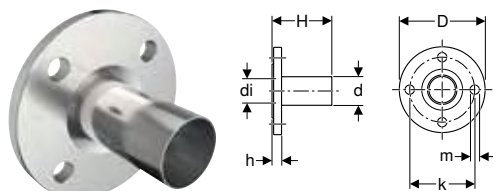

Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
33744	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	69.98
33745	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	85.56
33746	32	35	32	14	100	18	9	1.8	4	10 / 16		1	120.83
33747	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	141.74
33748	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16	75	1	249.95
33749	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	286.15
33750	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	334.96
33752	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	401.30

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112



Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 6



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36150	25	28	32	25.6	6	13.5	0.6	3.7	6		1	90.93
36151	32	35	40	32	7	13.5	0.6	2.7	6		1	130.89
36152	40	42	47	39	8	13.5	0.6	0	6		1	152.75
36153	50	54	59	51	9	13.5	0.8	0	6		1	189.11
36154	65	76.1	78	73.1	11	13.5	0.8	0	6		1	298.19
36155	80	88.9	91	84.9	12.8	13.5	1	0	6	96	1	349.11
36156	100	108	110	104	14.8	13.5	1	0	6	75	1	418.24


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 111

Geberit Mapress Stainless Steel flanged stub with plain end, for loose flange PN 10/16



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
36141	20	22	27	19.6	5.8	13.5	0.6	3.5	10 / 16		1	84.57
36142	25	28	32	25.6	6.8	13.5	0.6	3.7	10 / 16		1	103.14
36143	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16		1	148.97
36144	40	42	47	39	8.8	13.5	0.6	0	10 / 16		1	173.26
36145	50	54	59	51	10.2	13.5	0.8	0	10 / 16	160	1	214.50
36146	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	75	1	338.27
36147	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	75	1	396.03
36148	100	108	110	104	15.8	13.5	1	0	10 / 16	75	1	474.39

To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 112

Sealings

Geberit Mapress Stainless Steel cap (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Pressing indicator
- Silicone-free (LABS-free)
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
50752	12	15	2.3	0.3	5	1	15.19
50753	15	18	2.3	0.3	5	1	18.29
50754	20	22	2.4	0.3	5	1	20.11
50755	25	28	2.6	0.3	5	1	24.28
50756	32	35	2.9	0.3	5	1	33.43
50757	40	42	3.3	0.3	5	1	70.36
50758	50	54	3.8	0.3	5	1	80.10
50761	65	76.1	6	0.7		1	114.17
50762	80	88.9	6.7	0.7		1	140.85
50763	100	108	8.2	0.7		1	227.77

Feed-throughs

Geberit Mapress Stainless Steel bulkhead and deck passing with two plain ends



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics

- Silicone-free (LABS-free)
- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------


Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	l [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90980	12	15	2.5	45	16.5	5	1	69.62
90981	15	18	3	45	16.5		1	71.32
90982	20	22	3.4	45	16.5	5	1	74.82
90983	25	28	3.8	45	16.5	5	1	81.77
90984	32	35	4.5	45	16.5	5	1	99.16
90985	40	42	5.4	45	16.5	5	1	118.30
90986	50	54	7	45	16.5	5	1	130.50
90987	65	76.1	8.9	45	16.5		1	295.73
90988	80	88.9	10.8	45	16.5		1	330.57
90989	100	108	13.3	45	16.5		1	365.36



Accessories for Geberit Mapress Stainless Steel

Insulations for connectors

Geberit sound insulation set for single elbow tap connector 90°

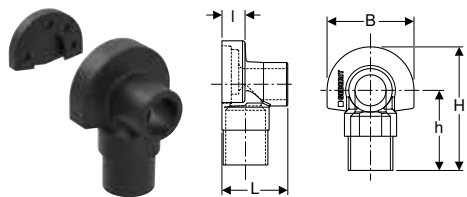

Application purposes

- For Geberit elbow tap connector with female thread Rp 1/2" and Rp 3/4"

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Product material	EPDM

Characteristics

- Black

Scope of delivery

- Sound insulation cap
- Sound insulation base


Art. no.	L [cm]	I [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.801.00.1	5.3	1.9	7	10	6.5	800	100	50	1	4.39

Accessories

- Geberit FlowFit connection bend 90° → p. 294

Caulks for pipes and fittings

Geberit sealing tape



Application purposes

- For protecting the pipe cross-sections of Geberit FlowFit against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Mapress system pipes and fittings against external corrosion factors

Characteristics

- UV-resistant
- Black

Technical data

Installation temperature	-10 – +50 °C
Temperature resistance	-60 – +100 °C
Product material	IIR


Art. no.	s [mm]	L [m]	B [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	12.5	3	6	1	45.96
601.815.00.1	1	12.5	5	5	1	76.56



- Attach after pressure test

Pipe fastenings

Geberit pipe bracket, insulated, with threaded socket M8 / M10

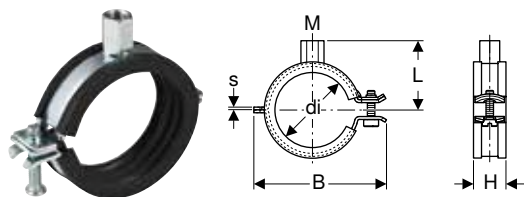

Application purposes

- For fastening Geberit system pipes for supply systems

Technical data


Product material	Steel
------------------	-------

Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Art. no.	Colour / surface	M [mm]	di, ø [mm]	s [mm]	L [cm]	B [cm]	H [cm]	SU2 [pc.]	GBP/pc.
601.850.26.1	galvanized	8 / 10	12-14	1.5	2.9	4.7	2.3	50	2.13
601.851.26.1	galvanized	8 / 10	15-19	1.5	3.1	5.2	2.3	50	2.13
601.852.26.1	galvanized	8 / 10	20-24	1.5	3.4	5.6	2.3	50	2.13
601.853.26.1	galvanized	8 / 10	25-30	1.5	3.6	6.3	2.3	50	2.29
601.854.26.1	galvanized	8 / 10	32-37	1.5	3.9	6.8	2.3	50	2.46
601.855.26.1	galvanized	8 / 10	40-46	2	4.3	7.6	2.3	50	2.64
601.857.26.1	galvanized	8 / 10	54-58	2	4.8	8.9	2.3	50	3.17
601.859.26.1	galvanized	8 / 10	74-80	2	6.4	11.9	2.3	50	4.41
601.860.26.1	galvanized	8 / 10	83-91	2	6.8	13	2.3	50	4.59
601.861.26.1	galvanized	8 / 10	108-114	2.5	8.1	15.3	2.8	25	5.28

Geberit double nipple M10 / G 1/2"



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Technical data


Product material	Steel
------------------	-------

Characteristics

- Reduced
- Zinc-plated

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.71

Geberit threaded rod



Application purposes

- For building drainage
- For fastening Geberit pipe brackets to base plates
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings


Characteristics

- Zinc-plated

Art. no.	Colour / surface	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.834.26.1	galvanized	10	200	25	1	16.27



Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1.15	2	1	35.02

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.37

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	3.92

Connector fastenings

Fastening for Geberit Mapress elbow adaptor 90°

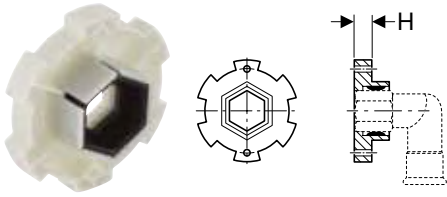

Application purposes

- For double panelling in drywall construction
- For fastening Geberit Mapress Carbon Steel elbow adaptors with female thread Rp 1/2"
- For fastening Geberit Mapress Stainless Steel elbow adaptors with female thread Rp 1/2"

Characteristics

- Sound-absorbing

Technical data

Product material	Duroplast
------------------	-----------

Art. no.	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90282	1.3	5	1	9.59

Geberit mounting plate, offset, single



Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Scope of delivery


- Fastening material

Technical data

Product material	Steel
------------------	-------

Art. no.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.733.00.1	400	25	5	6.08

Geberit mounting plate, offset, double, connecting distance 10 cm or 12 cm

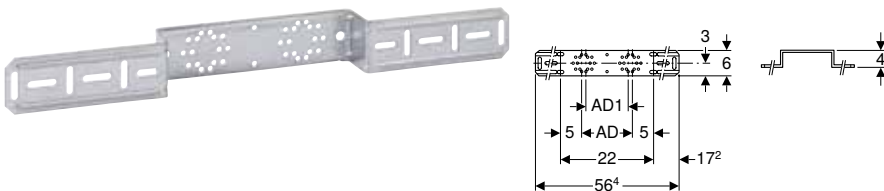

Application purposes

- For fastening Geberit connections for supply systems

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated

Scope of delivery

- Fastening material


Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.731.00.1	12	10	420	5	7.13

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107



Geberit mounting plate, offset, double, connecting distance 7.3 cm or 15.3 cm

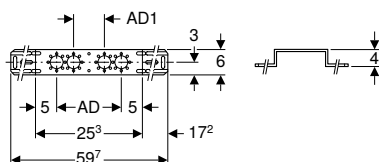

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Fastening material


Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.732.00.1	15.3	7.3	420	5	6.33

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

New

Geberit mounting plate, offset, double, connecting distance 15.3 cm

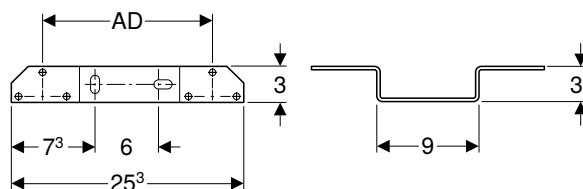

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------


Scope of delivery

- Fastening material

Art. no.	AD [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.742.00.1	15.3	5	1	7.88

Available as of April 2023

Geberit drain pipe bracket for mounting plates

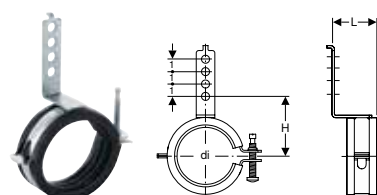

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Characteristics

- Sound-absorbing
- Zinc-plated

Art. no.	di, Ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.741.00.1	50-56	3.6	5.2-5.5	25	5	1	4.08

System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12		10		0.45
90402	12	15	50	10		0.45
90403	15	18	50	10		0.57
90404	20	22	50	10		0.57
90405	25	28	50	10		0.62
90406	32	35	50	10		0.62
90407	40	42		10		0.91
90408	50	54		10		0.91
90409	65	76.1			1	2.52
90410	80	88.9			1	3.44
90411	100	108			1	6.67

Geberit Mapress seal ring, FKM, blue



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 – +180 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	2.64
90882	12	15	100	10	1.12
90883	15	18	100	10	1.35
90884	20	22	100	10	1.61
90885	25	28	100	10	1.90
90886	32	35	100	10	2.21
90887	40	42	100	10	4.06
90888	50	54	100	10	5.68
90891	65	76.1	50	5	16.76
90892	80	88.9	50	5	20.84
90893	100	108	25	5	46.48



Geberit Mapress seal ring FKM, white



Application purposes

- For saturated steam
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11

Characteristics


- Silicone-free (LABS-free)

Technical data

Operating temperature	5–155 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
91152	12	15	50	10	1.49
91153	15	18	50	10	1.79
91154	20	22	50	10	2.11
91155	25	28	50	10	2.47
91156	32	35	50	10	2.89
91157	40	42	50	10	5.32
91158	50	54	50	10	7.39
91159	65	76.1	50	10	26.46
91160	80	88.9	50	10	37.04
91161	100	108	50	10	63.50

Geberit Mapress flat gasket, EPDM, black



Application purposes


- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.32
90081	3/4	24	13	2	50	10	0.32
90082	1	30	19.6	2		10	0.32
90083	1 1/4	39	25.6	2		10	0.51
90084	1 1/2	45	32	2		10	0.70
90085	1 3/4	50	39	2		10	0.83
90086	2 3/8	66	51	3		10	1.71

Geberit Mapress flat gasket, FPM, green

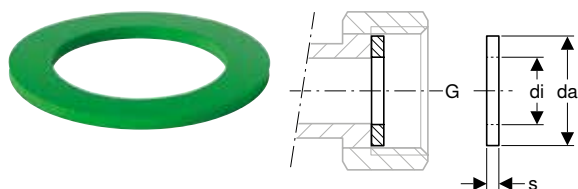

Application purposes


- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	FPM

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.82
90094	1	30	19.6	2	10	3.22
90095	1 1/4	39	25.6	2	10	1.39
90096	1 1/2	45	32	2	10	1.71
90097	1 3/4	50	39	2	10	2.42
90098	2 3/8	66	51	2	10	4.42

Geberit Mapress flat gasket Centellen® R WS 3825

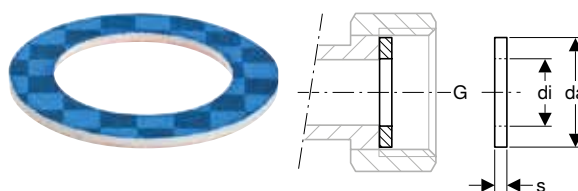

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Operating temperature	-30 – +150 °C
Product material	Centellen® R WS 3825

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.021.00.1	1/2	18	10	2	5	1.35
600.022.00.1	3/4	24	13	2	5	1.39
600.023.00.1	1	30	20	2	5	1.42
600.024.00.1	1 1/8	35	21	2	5	1.69
600.025.00.1	1 1/4	39	26	2	5	1.77
600.026.00.1	1 1/2	45	32	2	5	1.82
600.027.00.1	1 3/4	51	39	2	5	1.93
600.028.00.1	2	56	42	2	5	2.05
600.029.00.1	2 1/4	63	42	2	5	2.11
600.030.00.1	2 3/8	66	51	2	5	2.27
600.031.00.1	2 1/2	72	54	2	5	2.57
600.032.00.1	2 3/4	78	57	2	5	3.11
600.033.00.1	3	85	72	2	5	3.39
600.034.00.1	3 1/2	97	85	2	5	3.82



Geberit Mapress flat gasket Centellen® HD WS 3822

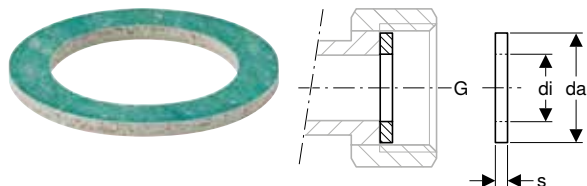

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Operating temperature	-20 – +155 °C
Product material	Centellen® HD WS 3822

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU1 [pc.]	GBP/pc.
90072	3/4	24	13	2	1	2.29
90074	1	30	19.6	2	1	2.29
90075	1 1/4	39	25.6	2	1	3.44
90076	1 1/2	45	32	2	1	3.44
90077	1 3/4	50	39	2	1	4.59
90078	2 3/8	66	51	3	1	5.72

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	44	20	2	6	1	2.23
91042	20	54	25	2	6	1	2.74
91043	25	64	30	2	6	1	3.24
91044	32	76	38	2	6	1	4.00
91045	40	86	45	2	6	1	5.02
91046	50	96	57	2	6	1	5.75
91047	65	116	76	2	6	1	6.49
91048	80	132	89	2	6	1	8.76
91049	100	152	108	2	6	1	9.99

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91031	15	50	20	2	10 / 16		1	1.77
91032	20	60	25	2	10 / 16	5	1	2.15
91033	25	70	30	2	10 / 16	5	1	2.56
91034	32	82	38	2	10 / 16	5	1	3.15
91035	40	92	45	2	10 / 16	5	1	3.93
91036	50	107	57	2	10 / 16	5	1	4.50
91037	65	127	76	2	10 / 16	5	1	5.10
91038	80	142	89	2	10 / 16	5	1	6.29
91039	100	162	108	2	10 / 16	5	1	7.88

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.47
91165	10	11	5	3.6	4	2.47
91166	12	14	5	3	4	3.08
91167	12	14	5.5	3.5	4	3.08
91168	12	14	6	4	4	2.35
91169	16	18	5.5	3.3	4	2.79
91170	16	18	6	3.8	4	2.79
91171	16	18	6.5	4.3	4	2.79
91172	16	18	7	4.8	4	2.79
91173	16	18	8	5.8	4	2.79





Geberit Mapress Carbon Steel

Preliminary remarks	117
Application overview – Geberit Mapress Carbon Steel	119
Geberit Mapress Carbon Steel	120
System pipes 1.0034	120
System pipes 1.0215	121
Pipe nipples	122
Couplings	122
Reducers	124
Bends	125
T-pieces	127
Pipe crosses	130
Adaptors, permanent	132
Adaptors and connections, detachable	137
Compensators	142
Sealings	143
T-pieces for heating	143
Connections for heating	144
Geberit Mapress Carbon Steel, FKM, blue	149
System pipes 1.0034	149
System pipes 1.0215	150
Pipe nipples	150
Couplings	151
Reducers	152
Bends	152
T-pieces	154
Adaptors, permanent	157
Adaptors and connections, detachable	160
Sealings	163
Accessories for Geberit Mapress Carbon Steel	164
Caulks for pipes and fittings	164
Pipe covers	164
Pipe fastenings	165
Connector fastenings	167
System seals	167
Sets of bolts for flange connections	171



Preliminary remarks

Introduction to Geberit Mapress Carbon Steel

Geberit Mapress Carbon Steel is especially suited for closed heating and cooling circuits. For solar and industrial installations, there is a special range of fittings available.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

There are three types of Carbon Steel pipe available; externally galvanised for closed heating and industrial applications, plastic coated for chilled water applications, and internally and externally galvanised pipe made specifically for wet sprinkler systems.

Geberit Mapress Carbon Steel is not suitable for drinking water or open heating circuits.

Benefits of Geberit Mapress Carbon Steel

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Variety of pipes

Three types of Carbon Steel pipe to suit different applications, including plastic coated for chilled applications.

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress Carbon Steel fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Always check that you are using the correct tools.

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress Carbon Steel

Geberit Great Britain, Version: December 2022

Application purposes	Operating temperature	Maximum operating pressure	Pipes		
			Carbon steel, outside zinc-plated	Carbon steel, outside PP-jacketed	Carbon steel, inside and outside zinc-plated
Liquid media					
For cooling and heating water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓ ⁷⁾	✓ ⁷⁾	
For cooling and heating water with antifreeze agent	-30 – +120 ° ³⁾	16 bar / 1600 kPa	✓ ⁷⁾	✓ ⁷⁾	
For district heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓ ⁷⁾		
For district heating water ≤ 140 °C	0–140 °C	16 bar / 1600 kPa	✓ ⁷⁾		
For extinguishing water (wet)	0–100 °C	16 bar / 1600 kPa			✓
For sprinklers (wet)	0–100 °C	16 / 12 / 10 bar 1600 / 1200 / 1000 kPa ⁵⁾			✓
For thermal media (solar)	-25 – +220 °C ⁴⁾³⁾	10 bar / 1000 kPa	✓ ⁷⁾		
For mineral and lubricating oil	Upon request	Upon request	8)		
For motor fuels (e.g. diesel)	Upon request	Upon request	8)		
Gaseous media					
For compressed air (oil purity class 2–3) ¹⁾	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa ⁶⁾			✓
For compressed air (oil purity class 3–X) ²⁾	0–100 °C	25 / 16 / 12 bar 2500 / 1600 / 1200 kPa ⁶⁾			✓

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Purity class oil according to ISO 8573-1:2010E; for details on humidity and particles see Technical Information "Geberit piping systems for compressed air installations"

²⁾ Oil purity class in accordance with ISO 8573-1:2010E; For details on moisture and particles, refer to the Technical Information on "Geberit piping systems for compressed air installations"

³⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

⁴⁾ Lifetime with collector standstill: 200 h/a at 180 °C; 60 h/a at 200 °C; total 500 h/lifetime at 220 °C

⁵⁾ 16 bar / 1600 kPa for d22–54mm, 12 bar / 1200 kPa for d66.7–76.1mm, 10 bar / 1000 kPa for d88.9–108mm

⁶⁾ 25 bar / 2500 kPa for d12–28mm, 16 bar / 1600 kPa for d35–54mm, 12 bar / 1200 kPa for d66.7–108mm

⁷⁾ Closed systems only

⁸⁾ Following Geberit approval



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.


	Fittings		Seal rings		Flat gaskets for screw connections			Flange gaskets
	Carbon steel, outside zinc-plated	Brass	CIIR, black	FKM, blue	EPDM, black	FPM, green	Centellen® R WS 3825	Centellen® HD WS 3822
	✓ ⁷⁾	✓ ⁷⁾	✓ ³⁾		✓ ³⁾			✓
	✓ ⁷⁾	✓ ⁷⁾	✓ ³⁾				✓	✓
	✓ ⁷⁾	✓ ⁷⁾	✓ ³⁾			✓ ³⁾	✓	✓
	✓ ⁷⁾	✓ ⁷⁾		✓ ³⁾			✓	✓
	✓		✓		✓			✓
	✓		✓		✓			✓
	✓	✓		✓		✓		✓
	8)			8)		8)		8)
	8)			8)		8)		8)
	✓		✓		✓			✓
	✓			✓		✓		✓



Geberit Mapress Carbon Steel

System pipes 1.0034

Geberit Mapress Carbon Steel system pipe, outside zinc-plated

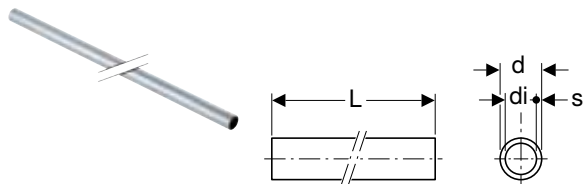

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 6 m								
29101	10	12	9.6	1.2	420	60		4.08
29102	12	15	12.6	1.2	840	120		4.16
29103	15	18	15.6	1.2	840	120		5.00
29104	20	22	19	1.5	840	60		6.64
29105	25	28	25	1.5	420	60		9.08
29106	32	35	32	1.5	420	30		12.05
29107	40	42	39	1.5	420	30		16.51
29108	50	54	51	1.5	420	30		21.44
29158	65	66.7	63.7	1.5	144		6	29.66
29159	65	76.1	72.1	2	144		6	47.24
29160	80	88.9	84.9	2	96		6	53.40
29161	100	108	104	2	78		6	62.37

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Geberit Mapress Carbon Steel system pipe, plastic-jacketed

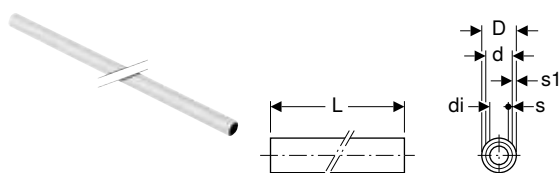

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated and plastic-jacketed
- Plastic jacketing made of PP, white

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU3 [m]	GBP/m
19201	10	12	9.6	1.4	1.2	0.9	6	120	5.57
19202	12	15	12.6	1.7	1.2	0.9	6	120	5.69
19203	15	18	15.6	2	1.2	0.9	6	90	6.56
19204	20	22	19	2.4	1.5	0.9	6	60	8.99
19205	25	28	25	3	1.5	0.9	6	60	11.77


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU3 [m]	GBP/m
19206	32	35	32	3.7	1.5	0.9	6	30	15.24
19207	40	42	39	4.4	1.5	0.9	6	30	19.67
19208	50	54	51	5.6	1.5	0.9	6	30	25.34

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress stripping tool → p. 428
- Geberit Mapress stripping tool → p. 429
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

System pipes 1.0215

Geberit Mapress Carbon Steel system pipe, inside and outside zinc-plated

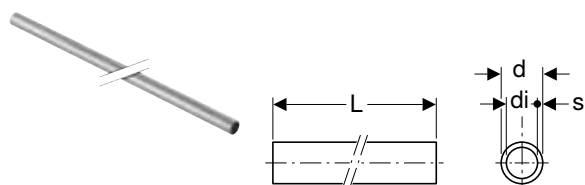
Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Sendzimir galvanized

Technical data

Product material	Non-alloy steel 1.0215 E220 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
19404	20	22	19	1.5	6	840	60		6.45
19405	25	28	25	1.5	6	420	60		9.09
19406	32	35	32	1.5	6	420	30		11.20
19407	40	42	39	1.5	6	420	30		13.28
19408	50	54	51	1.5	6	420	30		17.05
19409	65	76.1	72.1	2	6	144		6	31.96
19410	80	88.9	84.9	2	6	96		6	39.46
19411	100	108	104	2	6	78		6	51.18

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Pipe nipples

Geberit Mapress Carbon Steel pipe nipple, outside zinc-plated



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22050	12	15	12.6	1.2	5		5	1	1.55
22051	15	18	15.6	1.2	5	25	5		1.72
22052	20	22	19	1.5	5.2		5	1	1.82
22053	25	28	25	1.5	5.6	25	5		2.48
22054	32	35	32	1.5	6.2		5	1	4.35
22055	40	42	39	1.5	8		5	1	6.17
22056	50	54	51	1.5	9		5	1	7.97
22057	65	76.1	72.1	2	13.6			1	37.04
22058	80	88.9	84.9	2	15			1	43.37
22059	100	108	104	2	18			1	61.46

Couplings

Geberit Mapress Carbon Steel coupling



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22001	10	12	4.2	0.8		100	20		2.91
22002	12	15	4.8	0.8	12800	200	20		2.66
22003	15	18	4.8	0.8	8000	200	20		2.89
22004	20	22	5	0.8	8000	200	20		3.37
22005	25	28	5.4	0.8	5000	100	20		4.11
22006	32	35	6.2	1	3200	100	10		7.07
22007	40	42	7.1	1.1	1920	48	4		9.62
22008	50	54	8.3	1.3	768	48	4		11.52
22012	65	66.7	12.7	2.7	480	5		1	45.20
22009	65	76.1	12.7	2.1	320	20		1	63.67
22010	80	88.9	14.5	2.5	320	10		1	74.30
22011	100	108	17.6	2.6	160	10		1	95.50

Geberit Mapress Carbon Steel coupling, reduced



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Concentric
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
22023	40 / 32	42	35	7.9	1.9	4	13.05
22024	50 / 32	54	35	9.3	2.8	4	37.52
22025	50 / 40	54	42	9.2	2.3	4	37.52

Geberit Mapress Carbon Steel slip coupling



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22101	10	12	2.5	6.7	1.7		25	5		3.13
22102	12	15	2.5	8	3		100	20		3.35
22103	15	18	2.5	8	3	4800	50	10		3.55
22104	20	22	2.5	8.4	3.4		100	20		3.95
22105	25	28	3	9.1	3.1		100	10		5.23
22106	32	35	3	10.2	4.2	2500	50	10		10.64
22107	40	42	4	12	4		48	4		11.94
22108	50	54	4	14	6	768	24	4		15.44
22112	65	66.7	5	22	12				1	67.67
22109	65	76.1	6	23	11	320	10		1	103.26
22110	80	88.9	7	26	12	160	5		1	116.56
22111	100	108	8	31	15	80	5		1	139.87

Reducers

Geberit Mapress Carbon Steel reducer with plain end



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--


Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22301	12 / 10	15	12	5.1	3.4		50	10		2.36
22302	15 / 10	18	12	5.3	3.6		25	5		2.50
22303	15 / 12	18	15	5.5	3.5		200	20		2.50
22304	20 / 10	22	12	6	4.3		25	5		2.50
22305	20 / 12	22	15	5.9	3.9		200	20		2.50
22306	20 / 15	22	18	5.7	3.7		200	20		2.50
22349	25 / 10	28	12	6.7	5				1	3.35
22307	25 / 12	28	15	6.6	4.6		100	20		3.53
22308	25 / 15	28	18	6.4	4.4		100	20		3.53
22309	25 / 20	28	22	6	3.9	8000	200	20		3.53
22310	32 / 12	35	15	7.5	5.5		50	5		4.10
22311	32 / 15	35	18	7.4	5.5		50	5		4.10
22312	32 / 20	35	22	7.1	5		100	10		4.10
22313	32 / 25	35	28	6.8	4.5	3200	100	5		4.10
22315	40 / 15	42	18	8	6		24	4		9.66
22316	40 / 20	42	22	8.2	6.1		48	4		9.66
22317	40 / 25	42	28	8.3	6		48	4		9.66
22318	40 / 32	42	35	7.7	5.1	2400	48	4		9.66
22320	50 / 15	54	18	9.5	7.5			5	1	19.33
22321	50 / 20	54	22	9.5	7.4		48	4		19.33
22322	50 / 25	54	28	11	8.7		48	4		19.33
22323	50 / 32	54	35	10.6	8		48	4		19.33
22324	50 / 40	54	42	9.2	6.2	1536	48	4		19.33
22327	65 / 50	66.7	54	12.7	9.1	480	5		1	43.28
22330	65 / 40	76.1	42	12.7	9.7		25		1	56.45
22331	65 / 50	76.1	54	14.6	11.1	400	25		1	56.45
22332	65 / 65	76.1	66.7	15.1	10.1				1	56.45
22338	80 / 50	88.9	54	16.2	12.8		5		1	68.72
22339	80 / 65	88.9	76.1	16.1	10.8	400	5		1	68.72
22345	100 / 50	108	54	17.2	13.7	250	5		1	74.09
22346	100 / 65	108	76.1	18.4	13.1	200	5		1	74.09
22348	100 / 80	108	88.9	20.3	14.3	200	5		1	74.09



- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Carbon Steel – April 2022 to April 2023' overview

Bends

Geberit Mapress Carbon Steel bend



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
20601	10	12	3.2	1.5		25	5		3.58
20602	12	15	3.6	1.6		200	20		4.21
20603	15	18	3.7	1.7	8000	200	20		4.37
20604	20	22	4.2	2.1	4000	100	20		5.37
20605	25	28	4.8	2.5	3000	100	10		7.29
23606	32	35	4.3	1.7		100	5		13.51
23607	40	42	5.1	2.1	1536	48	4		21.40
23608	50	54	6.2	2.7	800	50	2		28.32
20612	65	66.7	9.3	4.2	400	5		1	70.61
20609	65	76.1	10.3	5	240	15		1	95.50
20610	80	88.9	11.7	5.7	160	5		1	114.63
20611	100	108	14.3	6.8	80	5		1	175.94
arc / angle: 90°									
20101	10	12	4.2	2.5	11200	100	20		3.58
20102	12	15	4.9	2.9	8000	200	20		3.92
20103	15	18	5.3	3.3	6000	200	20		4.56
20104	20	22	6.1	4	4000	100	20		5.31
20105	25	28	7.2	4.9	2500	50	10		7.27
23106	32	35	6.8	4.2	2000	50	5		17.37
23107	40	42	8	5	768	48	4		27.76
23108	50	54	10	6.5	384	24	4		33.17
20112	65	66.7	14.1	9.1	250	5		1	71.26
20109	65	76.1	15.9	10.6	160	10		1	101.57
20110	80	88.9	18.5	12.5	160	5		1	128.38
20111	100	108	23	15.5	60	5		1	175.94

Geberit Mapress Carbon Steel bend with plain end



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°										
20701	10	12	3.2	4.1	1.5		50	10		3.58
20702	12	15	3.6	4.5	1.6	10000	200	20		4.21
20703	15	18	3.7	4.2	1.7	8000	200	20		4.37
20704	20	22	4.2	5.2	2.1	6400	100	20		5.37
20705	25	28	4.8	5.6	2.5	3000	100	10		7.29
23706	32	35	4.3	5.3	1.7	3200	100	5		13.51
23707	40	42	5.1	6.1	2.1	1920	48	4		21.40
23708	50	54	6.2	7.3	2.7	768	48	2		28.32
20709	65	76.1	10.3	11.1	5		15		1	95.50
20710	80	88.9	11.7	12.8	5.7	160	5		1	114.63
20711	100	108	14.3	15.8	6.8	80	5		1	175.94
arc / angle: 90°										
20301	10	12	4.2	5.2	2.5		50	10		3.58
20302	12	15	4.9	5.9	2.9	8000	200	20		3.92
20303	15	18	5.3	6.1	3.3	6000	200	20		4.56
20304	20	22	6.1	7	4	4000	100	20		5.31
20305	25	28	7.2	7.9	4.9	2400	100	10		7.27
23306	32	35	6.8	7.4	4.2	2000	50	5		17.37
23307	40	42	8	8.8	5	1536	48	2		27.76
23308	50	54	10	10.8	6.5	640	20	2		33.17
20309	65	76.1	15.9	16.7	10.6	160	10		1	108.20
20310	80	88.9	18.5	19.5	12.5		5		1	131.58
20311	100	108	23	24.1	15.5	60	5		1	179.87

Geberit Mapress Carbon Steel bend with plain ends 90°

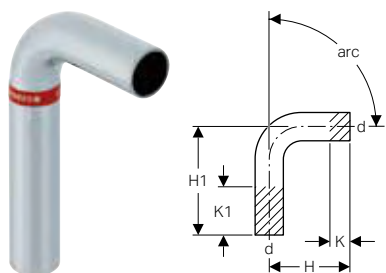

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20401	10	12	4.8	11.9	0	7.1		25	5		2.91
20402	12	15	5.9	12.9	0	7		100	20		3.57
20403	15	18	6.1	13.3	0	7.2		50	10		3.86
20404	20	22	7	14.2	0	7.2	3200	50	10		3.86
20405	25	28	7.9	15.5	0	7.6		50	10		4.56

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20406	32	35	7.7	15.4	0	7.7		25	5		10.59
20407	40	42	9	18	0	9			5	1	17.19
20408	50	54	11.1	20.5	0	9.4				1	21.75

Geberit Mapress Carbon Steel pipe bridge

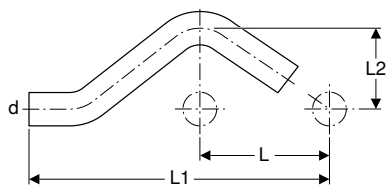

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
20801	10	12	6	16.4	3.2		25	5	3.92
20802	12	15	6	16.5	3.2		100	10	4.35
20803	15	18	6	16.6	3.3		50	10	4.73
20804	20	22	6	16.8	3.5	3200	50	10	5.46
20805	25	28	6	17.9	3.8		50	10	6.74

T-pieces

Geberit Mapress Carbon Steel T-piece, equal



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21001	10	12	5.6	3.5	2.8	1.1	1.8		50	10		6.78
21002	12	15	6.4	3.9	3.2	1.2	1.9		200	20		7.41
21003	15	18	6.8	4.1	3.4	1.4	2.1	5000	100	20		7.97
21004	20	22	7.4	4.4	3.7	1.6	2.3		100	20		8.53
21005	25	28	8.4	5	4.2	1.9	2.7	2500	50	10		11.45
21006	32	35	10	5.7	5	2.4	3.1	1600	50	5		17.87
21007	40	42	11.4	6.5	5.7	2.7	3.5	768	48	4		26.36
21008	50	54	13.8	7.7	6.9	3.4	4.2	320	20	2		31.62
21012	65	66.7	22	10.5	11	6	5.5		5		1	127.86
21009	65	76.1	23	11	11.5	6.2	5.7	160	10		1	181.90
21010	80	88.9	26	12.7	13	7	6.7	80	5		1	210.21
21011	100	108	31	15.3	15.5	8	7.8	60	5		1	255.84

Geberit Mapress T-piece, reduced

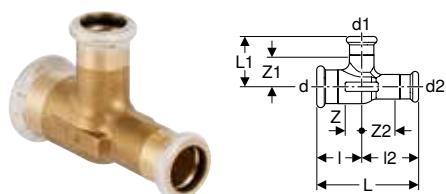

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61191	12 / 10 / 10	15	12	12	6.4	3.3	3.2	3.2	1.2	1.6	1.5			1	9.04
61192	15 / 12 / 12	18	15	15	7.4	3.5	3.4	4	1.4	1.5	2	25	5		9.98
61193	15 / 15 / 12	18	18	15	7.4	3.4	3.4	4	1.4	1.4	2		5	1	9.98
61194	20 / 12 / 12	22	15	15	7.7	3.8	3.4	4.3	1.3	1.8	2.3	25	5		12.34
61195	20 / 15 / 15	22	18	18	7.4	4	3.7	3.7	1.6	2	1.7		5	1	12.34
61196	20 / 20 / 12	22	22	15	8.3	3.7	3.7	4.6	1.6	1.6	2.6	25	5		12.34
61197	25 / 20 / 20	28	22	22	8	4.1	4.2	3.8	1.9	2	1.7	25	5		14.32

Geberit Mapress Carbon Steel T-piece, reduced

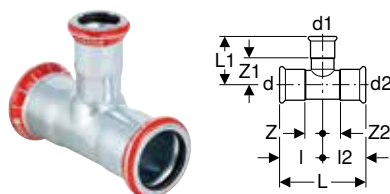

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21101	10 / 12 / 10	12	15	12	5.6	3.5	2.8	2.8	1.1	1.5	1.1			5	1	7.34
21201	12 / 10 / 10	15	12	12	7.2	3.6	3.2	4	1.2	1.9	2.3			5		7.34
21202	12 / 10 / 12	15	12	15	6.4	3.6	3.2	3.2	1.2	1.9	1.2		50	10		7.34
21103	12 / 15 / 12	15	18	15	6.4	3.6	3.2	3.2	1.2	1.6	1.2		50	10		7.78
21104	12 / 20 / 12	15	22	15	6.4	4.2	3.2	3.2	1.2	2.1	1.2		50	10		7.78
21203	15 / 10 / 15	18	12	18	6.8	3.8	3.4	3.4	1.4	2.1	1.4		50	10		7.78
21204	15 / 12 / 15	18	15	18	6.8	4.2	3.4	3.4	1.4	2.2	1.4	5000	100	20		7.78
21105	15 / 20 / 15	18	22	18	6.8	4.1	3.4	3.4	1.4	2	1.4		25	5		8.14
21205	20 / 10 / 20	22	12	22	7.4	4	3.7	3.7	1.6	2.3	1.6		50	10		8.14
21206	20 / 12 / 20	22	15	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6		100	20		8.14
21207	20 / 15 / 20	22	18	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6		100	20		8.14
21107	20 / 25 / 20	22	28	22	7.4	4.5	3.7	3.7	1.6	2.2	1.6		25	5		11.50
21209	25 / 12 / 25	28	15	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	3200	100	10		11.50
21210	25 / 15 / 25	28	18	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9		100	10		11.50
21211	25 / 20 / 25	28	22	28	8.4	4.8	4.2	4.2	1.9	2.7	1.9		100	10		11.50
21212	32 / 12 / 32	35	15	35	10	5.1	5	5	2.4	3.1	2.4	1600	50	5		17.31
21213	32 / 15 / 32	35	18	35	10	5.1	5	5	2.4	3.1	2.4	1600	50	5		17.31
21214	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4		50	5		17.31
21215	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	1600	50	5		17.31
21216	40 / 12 / 40	42	15	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7		48	4		24.16
21217	40 / 15 / 40	42	18	42	11.4	5.3	5.7	5.7	2.7	3.3	2.7	768	48	4		24.16
21218	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	768	48	4		24.16
21219	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	768	48	4		24.16
21220	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	768	48	4		24.16
21221	50 / 12 / 50	54	15	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	768	24	4		29.52
21222	50 / 15 / 50	54	18	54	13.8	5.9	6.9	6.9	3.4	3.9	3.4	640	40	2		29.52

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21223	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	640	40	2		29.52
21224	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	480	30	2		29.52
21225	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	384	24	2		29.52
21226	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4	480	30	2		29.52
21229	65 / 50 / 65	66.7	54	66.7	22	8.2	11	11	6	4.7	6		5		1	127.86
21208	65 / 20 / 65	76.1	22	76.1	23	7.2	11.5	11.5	6.2	5.1	6.2	160	10		1	181.97
21230	65 / 25 / 65	76.1	28	76.1	23	7.5	11.5	11.5	6.2	5.2	6.2	160	10		1	181.97
21231	65 / 32 / 65	76.1	35	76.1	23	7.9	11.5	11.5	6.2	5.3	6.2	200	5		1	181.97
21232	65 / 40 / 65	76.1	42	76.1	23	8.3	11.5	11.5	6.2	5.3	6.2	200	5		1	181.97
21233	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2	160	10		1	181.97
21234	65 / 65 / 65	76.1	66.7	76.1	23	11	11.5	11.5	6.2	6	6.2		5		1	181.97
21236	80 / 20 / 80	88.9	22	88.9	26	7.8	13	13	7	5.7	7	160	5		1	204.25
21237	80 / 25 / 80	88.9	28	88.9	26	8.1	13	13	7	5.8	7	160	5		1	204.25
21238	80 / 32 / 80	88.9	35	88.9	26	8.5	13	13	7	5.9	7	160	5		1	204.25
21239	80 / 40 / 80	88.9	42	88.9	26	8.9	13	13	7	5.9	7		5		1	204.25
21240	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7		5		1	204.25
21241	80 / 65 / 80	88.9	76.1	88.9	26	11.6	13	13	7	6.3	7	80	5		1	204.25
21244	100 / 20 / 100	108	22	108	31	8.8	15.5	15.5	8	6.7	8		5		1	241.37
21245	100 / 25 / 100	108	28	108	31	9.1	15.5	15.5	8	6.8	8	80	5		1	241.37
21246	100 / 32 / 100	108	35	108	31	9.5	15.5	15.5	8	6.9	8	80	5		1	241.37
21247	100 / 40 / 100	108	42	108	31	9.9	15.5	15.5	8	6.9	8	80	5		1	241.37
21248	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8	80	5		1	241.37
21249	100 / 65 / 100	108	76.1	108	31	12.6	15.5	15.5	8	7.3	8	80	5		1	241.37
21250	100 / 80 / 100	108	88.9	108	31	13.7	15.5	15.5	8	7.7	8				1	241.37



Geberit Mapress Carbon Steel T-piece with female thread



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21301	10	12	3/8	12	5.6	3.3	2.8	2.8	1.1	2.3	1.1				1	17.06
21302	10 / 15 / 10	12	1/2	12	5.6	3.6	2.8	2.8	1.1	2.3	1.1			5		17.06
21304	12 / 15 / 12	15	1/2	15	6.4	3.7	3.2	3.2	1.2	2.4	1.2	4800	100	20		10.61
21305	15	18	1/2	18	6.8	3.9	3.4	3.4	1.4	2.6	1.4	5000	100	20		10.61
21307	20 / 15 / 20	22	1/2	22	7.4	4	3.7	3.7	1.6	2.7	1.6		100	20		11.63
21308	20 / 20 / 20	22	3/4	22	7.4	4.4	3.7	3.7	1.6	2.8	1.6		25	5		11.63
21309	25 / 15 / 25	28	1/2	28	8.4	4.4	4.2	4.2	1.9	3.1	1.9	2500	50	10		13.51
21310	25 / 20 / 25	28	3/4	28	8.4	4.7	4.2	4.2	1.9	3.2	1.9		50	10		13.51
21311	25	28	1	28	8.4	5.3	4.2	4.2	1.9	3.6	1.9			5	1	13.51
21312	32 / 15 / 32	35	1/2	35	10	4.8	5	5	2.4	3.5	2.4		50	5		18.65
21313	32 / 20 / 32	35	3/4	35	10	5.1	5	5	2.4	3.6	2.4	1600	50	5		18.65
21314	32 / 25 / 32	35	1	35	10	5.6	5	5	2.4	3.9	2.4			5	1	18.65
21316	40 / 15 / 40	42	1/2	42	11.4	5.1	5.7	5.7	2.7	3.8	2.7	768	48	4		29.81
21317	40 / 20 / 40	42	3/4	42	11.4	5.4	5.7	5.7	2.7	3.9	2.7		48	4		29.81
21318	40 / 25 / 40	42	1	42	11.4	6	5.7	5.7	2.7	4.3	2.7			5	1	29.81
21320	50 / 15 / 50	54	1/2	54	13.8	5.7	6.9	6.9	3.4	4.4	3.4	640	20	2		31.58
21321	50 / 20 / 50	54	3/4	54	13.8	6	6.9	6.9	3.4	4.5	3.4		20	2		37.57
21322	50 / 25 / 50	54	1	54	13.8	6.6	6.9	6.9	3.4	4.9	3.4			5	1	37.57
21324	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4		5		1	37.57
21325	65 / 20 / 65	66.7	3/4	66.7	22	6.4	11	11	6	4.9	6	200	5		1	107.38
21326	65 / 20 / 65	76.1	3/4	76.1	23	7.4	11.5	11.5	6.2	5.9	6.2	320	10		1	159.72
21329	65 / 50 / 65	76.1	2	76.1	23	9.1	11.5	11.5	6.2	6.8	6.2				1	159.72
21331	80 / 20 / 80	88.9	3/4	88.9	26	8	13	13	7	6.5	7		5		1	173.24
21334	80 / 50 / 80	88.9	2	88.9	26	9.7	13	13	7	7.4	7				1	173.24
21336	100 / 20 / 100	108	3/4	108	31	9	15.5	15.5	8	7.5	8	80	5		1	208.47

Geberit Mapress Carbon Steel T-piece with female thread and plain ends



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	H [cm]	H1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21341	15	18	1/2	18	10	3.4	5	5	2.1	25	5	1	8.81
21342	20 / 15 / 20	22	1/2	22	10	3.6	5	5	2.3	50	10	1	9.62
21343	25 / 15 / 25	28	1/2	28	10	4.3	5	5	3		10	1	11.22
21344	32 / 15 / 32	35	1/2	35	11.4	4.7	5.7	5.7	3.4		10	1	15.56
21345	40 / 15 / 40	42	1/2	42	13.4	5	6.7	6.7	3.7		10	1	24.22
21346	50 / 15 / 50	54	1/2	54	14.6	5.7	7.3	7.3	4.4	25	5	1	26.15

Pipe crosses

Geberit Mapress Carbon Steel pipe cross, reduced



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21121	40 / 25	42	28	11.4	11.6	5.7	5.8	2.7	3.5	5	1	39.96
21122	50 / 25	54	28	13.8	12.8	6.9	6.4	3.4	4.1		1	44.80
21123	50 / 32	54	35	13.8	13.6	6.9	6.8	3.4	4.2		1	44.80
21127	65 / 25	76.1	28	23	15.8	11.5	7.9	6.2	5.6		1	275.10
21128	65 / 32	76.1	35	23	16.2	11.5	8.1	6.2	5.5		1	272.58
21130	80 / 25	88.9	28	26	17.4	13	8.7	7	6.4		1	307.98
21131	80 / 32	88.9	35	26	18	13	9	7	6.4		1	307.98
21133	100 / 25	108	28	31	20	15.5	10	8	7.7		1	380.77
21134	100 / 32	108	35	31	20	15.5	10	8	7.4		1	380.77

Geberit Mapress Carbon Steel pipe cross 30°, reduced

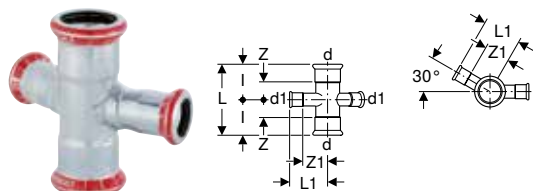

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21404	15 / 12	18	15	6.8	4	3.4	1.4	2	5	1	20.77
21406	20 / 12	22	15	7.4	4.2	3.7	1.6	2.2	5	1	21.47
21409	25 / 12	28	15	8.4	4.5	4.2	1.9	2.5		1	24.38

Geberit Mapress Carbon Steel pipe cross, reduced, offset

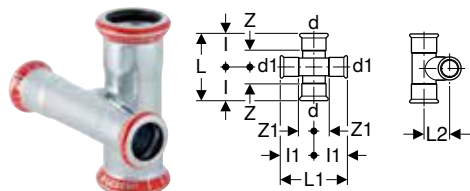

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21504	12	15	15	6.4	6.4	2	3.2	3.2	1.2	1.2	25	5		22.94
21505	15 / 12	18	15	6.8	8.4	2.5	3.4	4.2	1.4	2.2	25	5		25.45
21506	20 / 12	22	15	7.4	8.4	2.7	3.7	4.2	1.6	2.2	25	5		26.83
21509	20 / 15	22	18	7.4	8.4	2.8	3.7	4.2	1.6	2.2		5	1	27.16
21507	25 / 12	28	15	8.4	8.4	2.9	4.2	4.2	1.9	2.2		5	1	28.42
21510	25 / 15	28	18	8.4	8.4	3.2	4.2	4.2	1.9	2.2		5	1	28.82
21512	25 / 20	28	22	8.4	8.4	3.3	4.2	4.2	1.9	2.1			1	30.56

Adaptors, permanent

New

Geberit FlowFit adaptor to Geberit Mapress, with plain end

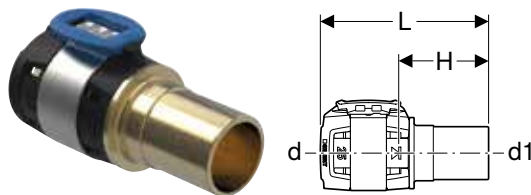

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap


Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77 GBP
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77 GBP
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01 GBP
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01 GBP
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01 GBP
620.232.00.1	20	25	22	7	3.7	25	5		13.91 GBP
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93 GBP
620.234.00.1	32	40	35	8	4.4	25	5		22.24 GBP
620.235.00.1	40	50	42	12.8	6.9	10			150.07 GBP
620.236.00.1	50	63	54	13.8	7.5	5			177.86 GBP

Available as of April 2023

Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	3.4		50	10	1	11.93
602.507.00.5	15 / 12	20	15	6.1	3.4		50	10	1	11.93
602.508.00.5	15	20	18	6.1	3.4		50	10		11.93
602.509.00.5	15 / 20	20	22	6.2	3.5		50	10	1	11.93
603.508.00.5	20	26	22	6.7	3.5		25	5		18.60
604.508.00.5	25	32	28	6.6	3.7		25	5		21.06
605.508.00.5	32	40	35	7.5	4.1		25	5		26.31
606.508.00.5	40	50	42	10.1	6.3		10		1	52.00
607.508.00.5	50	63	54	13.6	7	180	10		1	80.07

Geberit Mapress Carbon Steel adaptor with weld-on and plain end



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Not zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s [mm]	s1 [mm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
12412	12	15	17.2	1.2	2.3	12	3	25	5		6.84
12413	15	18	21.3	1.2	2.9	12	3	25	5		7.05
12414	20	22	26.9	1.5	4	12	3.4	25	5		7.65
12415	25	28	33.7	1.5	4.4	12	3.4	25	5		9.87
12416	32	35	42.4	1.5	5.2	12	4	25	5		10.86
12417	40	42	48.3	1.5	4.7	12	4.5	24	4		13.89
12418	50	54	60.3	1.5	4.7	12	5	24	4		17.12
12419	65	76.1	76.1	2	3.7	12	7	15	5	1	20.92
12420	80	88.9	88.9	2	4.1	12	7.5	5		1	26.18
12421	100	108	114.3	2	5.2	12	9	5		1	31.83

Geberit Mapress Carbon Steel adaptor with male thread



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21701	10	12	3/8	3.3	1.6		50	10		7.62
21700	10 / 15	12	1/2	3.6	2.2		25	5		7.62
21702	12 / 10	15	3/8	3.8	1.8		100	20		7.62
21703	12 / 15	15	1/2	4.1	2.1	6400	200	20		7.62
21714	12 / 20	15	3/4	4.3	2.6		50	10		7.62
21704	15	18	1/2	4.2	2.2	6400	200	20		8.61
21705	15 / 20	18	3/4	4.4	2.4	6400	100	20		8.61
21715	20 / 15	22	1/2	4	2.2		100	20		8.95
21707	20	22	3/4	4.4	2.3	4000	100	20		8.95
21716	20 / 25	22	1	4.6	2.6		100	20		8.95
21717	25 / 20	28	3/4	4.6	2.6		100	20		11.61
21708	25	28	1	4.8	2.5	4000	100	20		12.62
21727	25 / 32	28	1 1/4	4.8	2.8	2400	50	10		12.62
21719	32 / 25	35	1	5.1	2.5	3200	50	5		16.24
21709	32	35	1 1/4	5.3	2.7	2000	50	5		16.24
21720	32 / 40	35	1 1/2	5.3	3		50	5		16.24
21721	40 / 32	42	1 1/4	5.7	2.7		48	4		23.79
21710	40	42	1 1/2	5.7	2.7	1920	48	4		23.79
21722	50 / 40	54	1 1/2	7.1	3.6	960	24	4		28.05
21711	50	54	2	7.1	3.6	960	24	4		28.05
21712	65	66.7	2 1/2	11.8	4	480	5		1	41.00
21713	65	76.1	2 1/2	11.9	4.3		15		1	45.93
21724	80	88.9	3	13.7	5		5		1	51.53
21725	100	108	4	16	6.1		5		1	67.64

Geberit Mapress Carbon Steel adaptor with male thread and plain end



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21930	10	12	3/8	4.8				1	7.62
21931	10 / 15	12	1/2	5.5				1	7.62
21932	12 / 15	15	1/2	5.7		50	10		7.62
21933	15	18	1/2	5.7		50	5		8.61
21934	15 / 20	18	3/4	5.9			5	1	8.61
21935	20 / 15	22	1/2	5.7		50	5		8.95
21936	20	22	3/4	5.9		50	10		8.95
21937	25	28	1	6.6		50	10		12.02
21938	32	35	1 1/4	8	400		5	1	15.46
21939	40	42	1 1/2	9.1				1	17.70
21940	50	54	2	10.2			5	1	26.74

Geberit Mapress Carbon Steel adaptor with female thread



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21800	10	12	3/8	3.1	0.3			5	1	7.62
21801	10 / 15	12	1/2	3.4	0.4		25	5		7.62
21827	12 / 10	15	3/8	3.3	0.3		50	10		7.62
21802	12 / 15	15	1/2	3.7	0.4	9600	200	20		7.62
21823	12 / 20	15	3/4	3.8	0.7		25	5		7.62
21803	15	18	1/2	3.7	0.4		200	20		8.61
21804	15 / 20	18	3/4	3.8	0.3		50	10		8.61
21805	20 / 15	22	1/2	3.8	0.3	4800	100	20		8.95
21806	20	22	3/4	3.9	0.3	4800	100	20		8.95
21824	20 / 25	22	1	4.2	0.4		50	10		8.95
21807	25 / 15	28	1/2	3.8	0.2	2400	50	10		12.62
21808	25 / 20	28	3/4	3.8	0.1		50	10		12.62
21809	25	28	1	4.4	0.4	4000	50	10		12.62
21810	32 / 20	35	3/4	4.2	0.1		25	5		16.24
21820	32 / 25	35	1	4.5	0.2		50	5		16.24
21811	32	35	1 1/4	4.9	0.4	2500	50	5		16.24
21814	40	42	1 1/2	5.3	0.4	1920	48	4		18.64
21818	50	54	2	6.2	0.5	960	24	4		28.05

Geberit Mapress Carbon Steel adaptor with female thread and plain end



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21907	10	12	3/8	5.4	4.4				1	7.62
21901	10 / 15	12	1/2	5.8	4.5			5	1	7.62
21908	12 / 10	15	3/8	7.4	6			5	1	7.25
21902	12 / 15	15	1/2	6.1	4.8		50	10		7.62
21903	15	18	1/2	6.1	4.8		50	10		8.34
21904	15 / 20	18	3/4	6.4	4.9			5	1	8.34
21905	20 / 15	22	1/2	6.2	4.9	6400	100	20		8.88
21906	20	22	3/4	6.5	5		25	5		8.88
21910	25 / 15	28	1/2	7.1	5.6			5	1	10.63
21912	32 / 15	35	1/2	7.7	5.2			5	1	15.46
21914	40 / 15	42	1/2	8.1	5.7			5	1	18.05
21916	50 / 15	54	1/2	8.6	6.2			5	1	23.21
21918	65 / 15	76.1	1/2	10.5	8.7				1	59.92
21920	80 / 15	88.9	1/2	11.5	10.2				1	79.91
21922	100 / 15	108	1/2	12.7	11.4				1	117.26

Geberit Mapress Carbon Steel elbow adaptor 90° with male thread



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21611	10	12	3/8	3.2	2.5	1.5		5	1	7.62
21612	12 / 10	15	3/8	3.6	2.6	1.6		5	1	8.43
21613	12 / 15	15	1/2	3.5	3.1	1.5	100	20		8.43
21615	15	18	1/2	3.7	3.1	1.7	50	10		8.88
21618	20	22	3/4	4.1	3.5	2	25	5		12.02
21609	25 / 20	28	3/4	5.8	5	3.5		5	1	20.54
21610	25	28	1	5.8	5.4	3.5		5	1	20.54

Geberit Mapress Carbon Steel elbow adaptor 90° with female thread

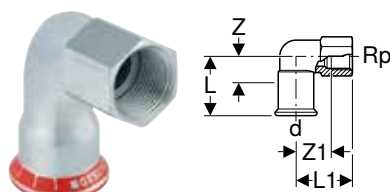

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21659	20 / 15	22	1/2	4.2	4	2.1	2.7		5	1	13.52
21660	25 / 15	28	1/2	4.7	4.4	2.4	3.1	50	5		17.24
21661	25 / 20	28	3/4	5.8	5	3.5	3.5		5	1	19.57
21662	25	28	1	5.8	5.4	3.5	3.6		5	1	19.57

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Geberit Mapress Carbon Steel bend adaptor 90° with male thread

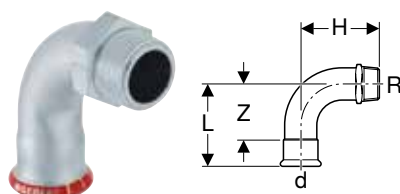

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20501	10	12	3/8	4.2	3.4	2.5	25	5		9.07
20502	12 / 10	15	3/8	4.9	3.7	2.9	50	10		9.75
20503	12 / 15	15	1/2	4.9	4	2.9	100	20		10.13
20505	15	18	1/2	5.3	4.7	3.3	50	10		10.98
20507	20	22	3/4	6.1	5.4	4	50	10		13.58
20508	25	28	1	7.2	6.6	4.9	50	10		17.24
23509	32	35	1 1/4	6.8	9.8	4.2	25	5		25.64
23510	40	42	1 1/2	8	11.3	5		5	1	45.12
23511	50	54	2	10	13.8	6.5		5	1	61.66



- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Carbon Steel – April 2022 to April 2023' overview

Geberit Mapress Carbon Steel bend adaptor 90° with female thread

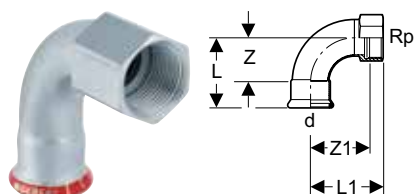

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20551	10	12	3/8	4.2	4.1	2.5	3			1	9.07
20552	12 / 10	15	3/8	4.9	4.5	2.9	3.4		5	1	9.75
20553	12 / 15	15	1/2	4.9	4.8	2.9	3.3	50	5		10.13
20555	15	18	1/2	5.3	5.2	3.3	3.7	50	5		10.98
20557	20	22	3/4	6.1	6	4	4.4	25	5		13.58
20558	25 / 15	28	1/2	7.2	6.5	4.9	5		5	1	17.24
20559	25	28	1	7.2	6.6	4.9	4.7	25	5		19.57
20560	32	35	1 1/4	6.8	7.5	4.2	5.4		5	1	26.46
20561	40	42	1 1/2	8	8.4	5	6.3			1	46.55
20562	50	54	2	10	10.4	6.5	7.8			1	59.35

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit Mapress Carbon Steel union



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25319	10	12	1/2	5.8	2.1		1	20.71
25320	12	15	3/4	6.6	2.6	5	1	21.08
25321	15	18	3/4	6.9	2.9	5	1	24.00
25322	20	22	1	7.2	3	5	1	29.72
25323	25	28	1 1/4	7.7	3.1	5	1	49.41
25324	32	35	1 1/2	8.2	3	5	1	67.98
25325	40	42	1 3/4	9.5	3.5	5	1	97.86
25326	50	54	2 3/8	11.3	4.3	5	1	162.42

Geberit Mapress Carbon Steel adaptor union with male thread



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	R [°]	G [°]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25330	12 / 15	15	1/2	3/4	6.1	4.1	50	10		10.61
25332	15	18	1/2	3/4	6.1	4.1	50	10		12.00
25335	20	22	3/4	1	6.8	4.7	50	2		15.00
25329	20 / 25	22	1	1	6.9	4.8	25	5		15.16
25337	25	28	1	1 1/4	7.5	5.2	40	2		24.75
25338	32	35	1 1/4	1 1/2	8	5.4	20	2		33.73
25339	40	42	1 1/2	1 3/4	8.5	5.5	20	2		51.20
25340	50	54	2	2 3/8	9.7	6.2	15		1	116.91

Geberit Mapress Carbon Steel adaptor union with female thread



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp [°]	G [°]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25300	12 / 15	15	1/2	3/4	5.8	2.3	25	5		11.34
25302	15	18	1/2	3/4	5.8	2.3	50	5		12.34
25304	20	22	3/4	1	6.3	2.3	50	5		16.89
25305	20 / 25	22	1	1	6.6	3		5	1	16.89
25306	25	28	1	1 1/4	7.1	3.3	50	5		24.98
25307	32	35	1 1/4	1 1/2	7.7	3.5	25		1	35.87
25308	40	42	1 1/2	1 3/4	8.2	3.1		5	1	52.21
25309	50	54	2	2 3/8	9.5	3.4		5	1	116.58

Geberit Mapress Carbon Steel connector with union nut



Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass, nickel-plated
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, \varnothing [mm]	G ["]	d _i , \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25042	12	15	1/2	10	5.1	2.5	25	5	6.14
25048	15	18	1/2	10	5.3	2.6	25	5	6.24
25049	20	22	3/4	13	5.4	2.7	50	10	8.83

Geberit Mapress Carbon Steel adaptor with union nut

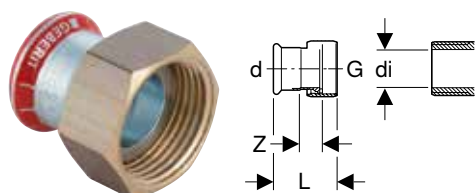

Application purposes

- For compressed air (oil purity class 3)
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Technical data

Media temperature with flat gasket EPDM	0–100 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, \varnothing [mm]	G ["]	d _i , \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
25032	12	15	3/4	13	3.7	1.1	50	10		6.14
25033	15	18	3/4	13	3.7	1.1	50	10		6.24
25040	15	18	1	20	3.9	1.1		5	1	6.24
25034	20	22	1	20	4	1.1	50	10		8.83
25044	20	22	1 1/4	26	4.3	1.3		5	1	8.83
25035	25	28	1 1/4	26	4.4	1.3	50	10		12.33
25050	25	28	1 1/2	32	4.6	1.3	50	10		12.33
25036	32	35	1 1/2	32	4.8	1.3	50	5		19.62
25051	32	35	2	42	4.8	1.2	25	5		19.62
25037	40	42	1 3/4	39	5.2	1.3	24	4		26.54
25052	40	42	2	42	5.4	1.4	24	4		26.54
25053	40	42	2 1/4	42	5.6	1.4			1	26.54
25038	50	54	2 3/8	51	5.8	1.5			1	35.77
25054	50	54	2 1/2	54	6.3	1.4		5	1	35.77
25055	50	54	2 3/4	57	6.3	1.4			1	35.77
25045	65	76.1	3	73	9.9	3.3			1	104.67
25046	80	88.9	3 1/2	84	11.1	3.7			1	181.20

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes

- Suitable exclusively for liquid media

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, \varnothing [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	19.52
22431	12	20	15	6.7	5.2	10	2	22.77
22422	15	16	18	6.4	4.9	10	2	21.17
22432	15	20	18	6.7	5.2	10	2	24.42
22423	20	16	22	6.8	5.9	10	2	22.77
22433	20	20	22	6.8	5.9	10	2	26.02
22444	25	25	28	6.8	5.9	10	2	35.78



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Carbon Steel flange PN 6, with pressing socket

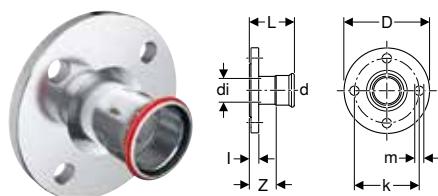

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23744	20	22	19	9	65	11	6.1	1.4	4	4	6		1	56.40
23745	25	28	25	10	75	11	6.5	1.4	4.2	4	6		1	70.46
23746	32	35	32	12	90	14	6.8	1.4	4.2	4	6		1	90.59
23747	40	42	39	13	100	14	7.5	1.4	4.5	4	6		1	112.75
23748	50	54	51	14	110	14	8.3	1.4	4.8	4	6		1	140.89
23749	65	76.1	72	16	130	14	11.4	1.4	6.1	4	6	75	1	181.20
23750	80	88.9	84.8	19	150	18	12.1	1.6	6.1	4	6	75	1	221.45
23751	100	108	103.9	21	170	18	12.6	1.6	5.1	4	6	75	1	261.69

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171
- Geberit flange gasket PN 6 → p. 111

Geberit Mapress Carbon Steel flange PN 10/16, with pressing socket

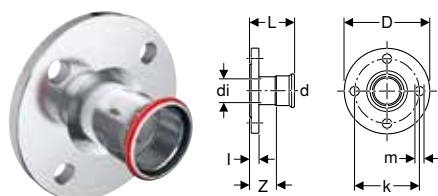

Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23754	20	22	19	10.5	75	14	6.5	1.8	4.4	4	10 / 16		1	47.15
23755	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	56.74
23756	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	84.38
23757	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	97.02
23758	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16	192	1	124.02
23762	65	66.7	63.1	18.5	145	18	11.8	1.8	6.8	4	10 / 16	75	1	136.66
23759	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	183.25
23760	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16	75	1	217.77
23761	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16	75	1	258.51

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Carbon Steel flange PN 6, with plain end

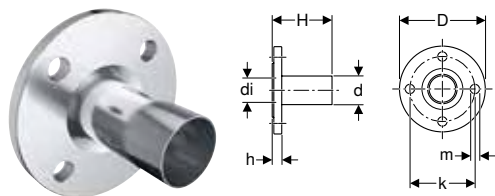

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Outside zinc-plated
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23764	20	22	19	9	65	11	7.5	1.4	4	6		1	53.70
23765	25	28	25	10	75	11	7.7	1.4	4	6		1	67.08
23766	32	35	32	12	90	14	8.6	1.4	4	6		1	90.59
23767	40	42	39	13	100	14	10.4	1.4	4	6		1	107.38
23768	50	54	51	14	110	14	10.9	1.4	4	6	96	1	140.89
23769	65	76.1	72	16	130	14	13.2	1.4	4	6	75	1	181.20
23770	80	88.9	84.8	19	150	18	14.8	1.6	4	6	75	1	221.45
23771	100	108	103.9	21	170	18	16.1	1.6	4	6	75	1	261.69

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171
- Geberit flange gasket PN 6 → p. 111

Geberit Mapress Carbon Steel flange PN 10/16, with plain end

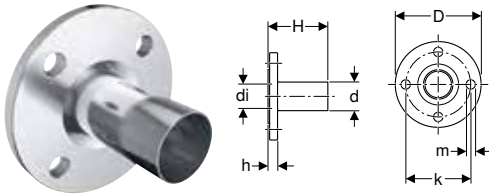

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics

- Outside zinc-plated
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23784	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	52.56
23785	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	65.84
23786	32	35	32	14	100	18	9	1.8	4	10 / 16		1	88.91
23787	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	105.36
23788	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16		1	138.20
23789	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	177.91
23790	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	217.25
23791	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	256.87

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171
- Geberit flange gasket PN 10/16 → p. 112

Compensators

Geberit Mapress Carbon Steel axial expansion fitting with pressing sockets



Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For technical building systems, industry and shipbuilding
- Exclusively for absorption of axial linear expansion during operation

Characteristics

- Pressing indicator
- Leaky if unpressed
- White exterior
- Bellows made of stainless steel
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Maximum operating pressure	16 bar
Operating temperature	-30 – +120 °C
Product material	Non-alloy steel 1.0034 E195 (EN 10305)

Art. no.	DN	d, ø [mm]	D [cm]	La [mm]	L [cm]	SU1 [pc.]	GBP/pc.
23932	12	15	2.6	+/- 7	15.1	1	132.97
23933	15	18	2.6	+/- 7	14.7	1	134.84
23934	20	22	3.1	+/- 11	10.6	1	146.01
23935	25	28	3.9	+/- 13	12	1	156.95
23936	32	35	4.6	+/- 13	13.9	1	168.25
23937	40	42	5.9	+/- 13	14.9	1	367.26
23938	50	54	7	+/- 18	17.6	1	397.08
23939	65	76.1	8.8	+/- 22	26.2	1	484.50
23940	80	88.9	11.7	+/- 23	28.6	1	504.02
23941	100	108	14.4	+/- 23	54.2	1	1189.98

Sealings

Geberit Mapress Carbon Steel cap



Application purposes

- For compressed air (oil purity class 3)
- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20211	10	12	2	0.3	25	5		5.08
20212	12	15	2.3	0.3	100	20		5.08
20213	15	18	2.3	0.3	100	10		6.09
20214	20	22	2.4	0.3	100	10		6.57
20215	25	28	2.6	0.3	50	10		7.62
20216	32	35	2.9	0.3	50	5		10.79
20217	40	42	3.3	0.3	48	4		22.79
20218	50	54	3.8	0.3	48	4		25.65
20222	65	66.7	5.5	0.5			1	35.78
20219	65	76.1	6	0.7	5		1	38.27
20220	80	88.9	6.7	0.7			1	52.98
20221	100	108	8.2	0.7			1	68.43

T-pieces for heating

Geberit Mapress T-piece crossing with insulation box

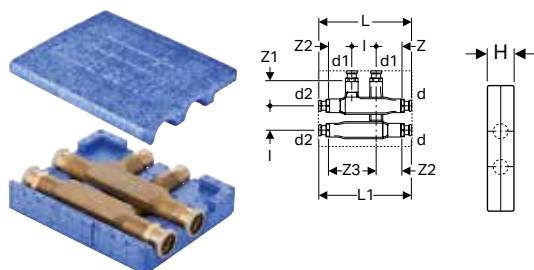

Application purposes

- For connecting to two parallel pipes without intersecting
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	DR brass CC752S
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63113	12 / 12 / 12	15	15	15	19	19	5	5	4.8	5.2	5.3	9.8	5	1	34.30
63115	15 / 12 / 15	18	15	18	19	19	5	5	4.8	5.2	5.3	9.8	5	1	99.73
63117	20 / 12 / 20	22	15	22	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	104.45
63118	20 / 15 / 20	22	18	22	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	104.45

Connections for heating

Geberit Mapress metal pipe connector bend 90° with insulation box and union connector for Euro cone

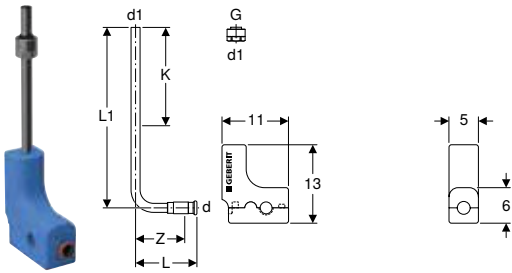

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connector bend 90°, made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63126	12 / 20	15	3/4	15	10.2	30	8.2	17	20	2	15.10



- Tighten the union as far as it will go

Geberit Mapress metal pipe connector T-piece with insulation box and union connector for Euro cone

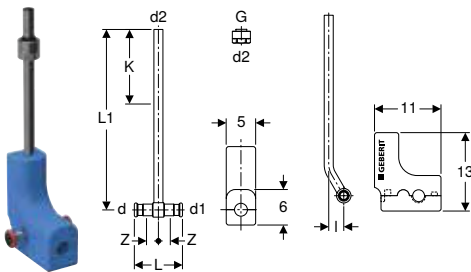

Application purposes

- For connecting radiator valves
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connection T-piece made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63127	12 / 20 / 12	15	3/4	15	15	8	30	2.5	2	17	20	2	53.96
63128	15 / 20 / 15	18	3/4	18	15	9.4	30	2.5	2.7	17	20	2	56.82



- Tighten the union as far as it will go

Geberit Mapress type C connection box

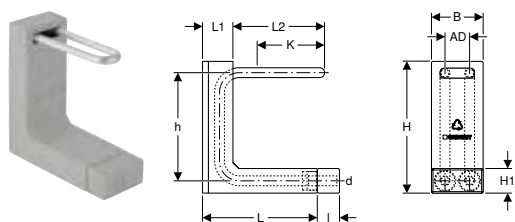

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	EPS
Insulation thickness	13 mm
Thermal conductivity, insulation	0.031 W/(m·K)

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63108	12	15	5	22.3	6.3	17.6	4.5	10.5	27	5	22	13.6	80	10	1	36.21

Geberit Mapress type L connection box

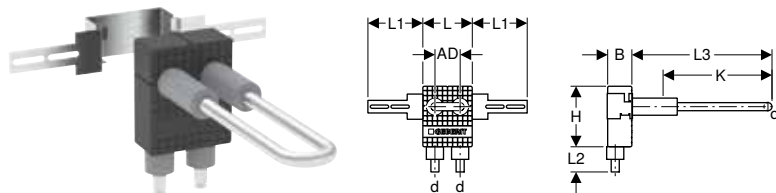

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	PUR
Insulation thickness	7 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Scope of delivery

- Installation sheet

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	B [cm]	H [cm]	K [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63109	12	15	5	10	11	5	25	5	12	21	160	10	1	47.22

Geberit Mapress Carbon Steel connector T-piece set for return flow

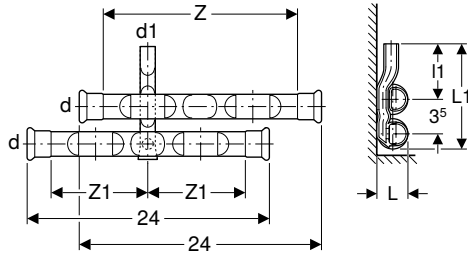

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with long connection
- Socket, offset, long

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
23602	12	15	15	2.7	10.8	6.5	10	20		1	32.13
23603	15 / 12	18	15	2.9	11	6.5	10	20	5	1	33.21
23604	20 / 12	22	15	3.3	11.2	6.5	9.9	19.8		1	34.36

Geberit Mapress Carbon Steel set of connector T-pieces for inlet and return flow

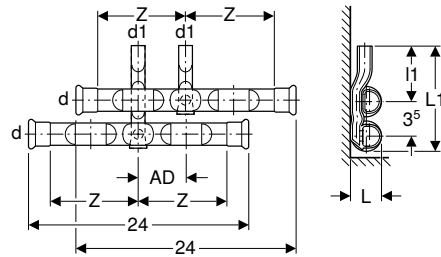

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	AD [cm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
24002	12	15	15	4-6	2.7	10.8	6.5	10	25		1	52.92
24003	15 / 12	18	15	4-6	2.9	11	6.5	10	25		1	54.78
24004	20 / 12	22	15	4-6	3.3	11.2	6.5	10	5		1	57.54

Geberit Mapress Carbon Steel set of connector T-pieces for inlet and return flow, with union connector for Euro cone

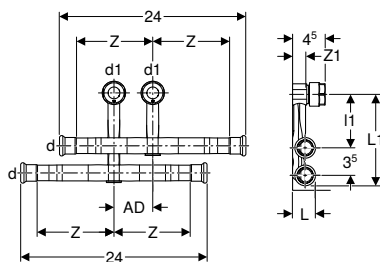

Application purposes

- For skirting board systems
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Characteristics


- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside zinc-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Union connector for Geberit Mapress Stainless Steel 1.4401 system pipes
- Union connector for Geberit Mapress Carbon Steel system pipes
- Union connector for copper pipes, rough, nickel-plated and chrome-plated
- Installation completely in front of the wall

Art. no.	DN	d, ø [mm]	d1, ø [mm]	AD [cm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
24045	12	15	15	5	2.7	12.6	6.8	10	1.7	5	1	92.17
24046	15 / 12	18	15	5	2.9	12.7	6.8	10	1.7	5	1	94.89
24047	20 / 12	22	15	5	3.3	13	6.8	10	1.7	5	1	99.06



- Tighten the union as far as it will go

Geberit metal pipe bend with plain ends 90° with union connector for Euro cone



Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.601.22.3	12 / 20	15	3/4	13	10	7.5	4.5	20	2	7.39



- Tighten the union as far as it will go

Geberit metal pipe elbow 90°, lockable, with union connector for Euro cone

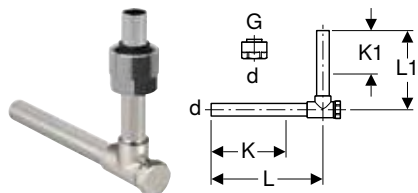

Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data


Product material	Brass / copper
------------------	----------------

Art. no.	DN	d, \varnothing [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.603.22.3	12 / 20	15	3/4	12.5	10	8	5.5	50	10	2	24.07



- Tighten the union as far as it will go

Geberit Mapress Carbon Steel connector with union nut



Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Leaky if unpressed
- Outside zinc-plated
- Union nut made of brass, nickel-plated
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug


Technical data

Media temperature with flat gasket EPDM	0–100 °C
---	----------

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
25042	12	15	1/2	10	5.1	2.5	25	5	6.14
25048	15	18	1/2	10	5.3	2.6	25	5	6.24
25049	20	22	3/4	13	5.4	2.7	50	10	8.83

Geberit Mapress Carbon Steel suction nozzle for single-pipe heating

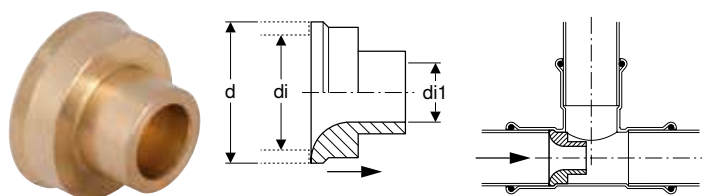

Application purposes

- For heating
- For inserting in Geberit Mapress T-pieces
- Application overview – Geberit Mapress Carbon Steel → p. 119


Technical data

Product material	Brass CW614N
------------------	--------------

Art. no.	DN	d, ø [mm]	di, ø [mm]	di1, ø [mm]	SU1 [pc.]	GBP/pc.
90253	15	18	15.6	7	1	1.42
90254	20	22	19	9	1	1.63
90255	25	28	25	12	1	1.81

Geberit Mapress Carbon Steel, FKM, blue System pipes 1.0034

Geberit Mapress Carbon Steel system pipe, outside zinc-plated

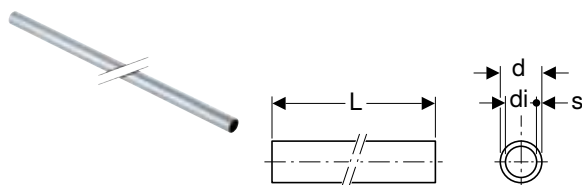

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
L / length: 6 m								
29101	10	12	9.6	1.2	420	60		4.08
29102	12	15	12.6	1.2	840	120		4.16
29103	15	18	15.6	1.2	840	120		5.00
29104	20	22	19	1.5	840	60		6.64
29105	25	28	25	1.5	420	60		9.08
29106	32	35	32	1.5	420	30		12.05
29107	40	42	39	1.5	420	30		16.51
29108	50	54	51	1.5	420	30		21.44
29159	65	76.1	72.1	2	144		6	47.24
29160	80	88.9	84.9	2	96		6	53.40
29161	100	108	104	2	78		6	62.37

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

System pipes 1.0215

Geberit Mapress Carbon Steel system pipe, inside and outside zinc-plated

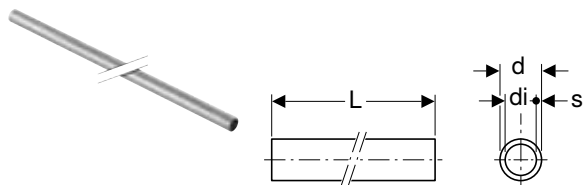

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Sendzimir galvanized

Technical data

Product material	Non-alloy steel 1.0215 E220 (EN 10305)
Surface roughness	10 µm
Thermal expansion	0.012 mm/(m·K)
Thermal conductivity, pipe	60 W/(m·K)
Specific thermal capacity	500 J/(kg·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
19404	20	22	19	1.5	6	840	60		6.45
19405	25	28	25	1.5	6	420	60		9.09
19406	32	35	32	1.5	6	420	30		11.20
19407	40	42	39	1.5	6	420	30		13.28
19408	50	54	51	1.5	6	420	30		17.05
19409	65	76.1	72.1	2	6	144		6	31.96
19410	80	88.9	84.9	2	6	96		6	39.46
19411	100	108	104	2	6	78		6	51.18

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Pipe nipples

Geberit Mapress Carbon Steel pipe nipple, outside zinc-plated



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
22050	12	15	12.6	1.2	5		5	1	1.55
22051	15	18	15.6	1.2	5	25	5		1.72
22052	20	22	19	1.5	5.2		5	1	1.82
22053	25	28	25	1.5	5.6	25	5		2.48
22054	32	35	32	1.5	6.2		5	1	4.35
22055	40	42	39	1.5	8		5	1	6.17
22056	50	54	51	1.5	9		5	1	7.97
22057	65	76.1	72.1	2	13.6			1	37.04
22058	80	88.9	84.9	2	15			1	43.37
22059	100	108	104	2	18			1	61.46

Couplings

Geberit Mapress Carbon Steel coupling (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51062	12	15	4.8	0.8	1	5.27
51063	15	18	4.8	0.8	1	6.05
51064	20	22	5	0.8	1	7.53
51065	25	28	5.4	0.8	1	8.95
51066	32	35	6.2	1	1	13.20
51067	40	42	7.1	1.1	1	18.48
51068	50	54	8.3	1.3	1	25.95
51071	65	76.1	12.7	2.1	1	102.14
51072	80	88.9	14.5	2.5	1	119.61
51073	100	108	17.6	2.6	1	182.84

Geberit Mapress Carbon Steel slip coupling (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51082	12	15	2.5	8	3	1	6.02
51083	15	18	2.5	8	3	1	6.84
51084	20	22	2.5	8.4	3.4	1	8.06
51085	25	28	3	9.1	3.1	1	10.11
51086	32	35	3	10.2	4.2	1	17.23
51087	40	42	4	12	4	1	20.91
51088	50	54	4	14	6	1	29.99
51091	65	76.1	6	23	11	1	146.17
51092	80	88.9	7	26	12	1	166.79
51093	100	108	8	31	15	1	234.65

Reducers

Geberit Mapress Carbon Steel reducer with plain end (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Concentric
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--


Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
51133	15 / 12	18	15	5.5	3.5	1	3.72
51134	20 / 12	22	15	5.9	3.9	1	3.52
51135	20 / 15	22	18	5.7	3.7	1	3.52
51136	25 / 12	28	15	6.6	4.6	1	4.83
51137	25 / 15	28	18	6.4	4.4	1	4.83
51138	25 / 20	28	22	6	3.9	1	4.83
51141	32 / 20	35	22	7.1	5	1	5.09
51142	32 / 25	35	28	6.8	4.5	1	5.09
51145	40 / 20	42	22	8.2	6.1	1	12.31
51146	40 / 25	42	28	8.3	6	1	12.31
51147	40 / 32	42	35	7.7	5.1	1	12.31
51150	50 / 20	54	22	9.5	7.4	1	24.21
51151	50 / 25	54	28	11	8.7	1	24.21
51152	50 / 32	54	35	10.6	8	1	24.21
51153	50 / 40	54	42	9.2	6.2	1	24.21
51164	65 / 50	76.1	54	14.6	11.1	1	66.17
51167	80 / 50	88.9	54	16.2	12.8	1	89.80
51168	80 / 65	88.9	76.1	16.1	10.8	1	89.80
51169	100 / 50	108	54	17.2	13.7	1	98.63
51171	100 / 65	108	76.1	18.4	13.1	1	98.63
51172	100 / 80	108	88.9	20.3	14.3	1	98.63



- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Carbon Steel – April 2022 to April 2023' overview

Bends

Geberit Mapress Carbon Steel bend (FKM, blue)

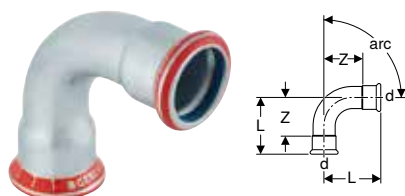

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 45°						
51222	12	15	3.6	1.6	1	6.04
51223	15	18	3.7	1.7	1	6.81
51224	20	22	4.2	2.1	1	9.53
51225	25	28	4.8	2.5	1	12.27

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51226	32	35	4.3	1.7	1	19.96
51227	40	42	5.1	2.1	1	30.87
51228	50	54	6.2	2.7	1	41.48
51231	65	76.1	10.3	5	1	135.56
51232	80	88.9	11.7	5.7	1	161.96
51233	100	108	14.3	6.8	1	277.29
arc / angle: 90°						
51282	12	15	4.9	2.9	1	5.70
51283	15	18	5.3	3.3	1	7.06
51284	20	22	6.1	4	1	9.50
51285	25	28	7.2	4.9	1	12.26
51286	32	35	6.8	4.2	1	25.69
51287	40	42	8	5	1	38.16
51288	50	54	10	6.5	1	48.55
51291	65	76.1	15.9	10.6	1	144.14
51292	80	88.9	18.5	12.5	1	181.46
51293	100	108	23	15.5	1	277.29



Geberit Mapress Carbon Steel bend with plain end (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
arc / angle: 45°							
51242	12	15	3.6	4.5	1.6	1	6.04
51243	15	18	3.7	4.2	1.7	1	6.81
51244	20	22	4.2	5.2	2.1	1	9.53
51245	25	28	4.8	5.6	2.5	1	12.27
51246	32	35	4.3	5.3	1.7	1	16.83
51247	40	42	5.1	6.1	2.1	1	25.65
51248	50	54	6.2	7.3	2.7	1	36.50
51251	65	76.1	10.3	11.1	5	1	135.56
51252	80	88.9	11.7	12.8	5.7	1	161.96
51253	100	108	14.3	15.8	6.8	1	277.29
arc / angle: 90°							
51312	12	15	4.9	5.9	2.9	1	5.67
51313	15	18	5.3	6.1	3.3	1	7.06
51314	20	22	6.1	7	4	1	9.50
51315	25	28	7.2	7.9	4.9	1	12.26
51316	32	35	6.8	7.4	4.2	1	25.69
51317	40	42	8	8.8	5	1	38.16
51318	50	54	10	10.8	6.5	1	48.55
51321	65	76.1	15.9	16.7	10.6	1	153.60
51322	80	88.9	18.5	19.5	12.5	1	185.94
51323	100	108	23	24.1	15.5	1	283.46

Geberit Mapress Carbon Steel bend with plain ends 90°

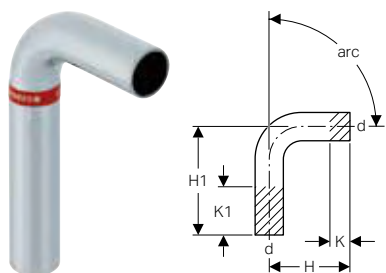

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
20401	10	12	4.8	11.9	0	7.1		25	5		2.91
20402	12	15	5.9	12.9	0	7		100	20		3.57
20403	15	18	6.1	13.3	0	7.2		50	10		3.86
20404	20	22	7	14.2	0	7.2	3200	50	10		3.86
20405	25	28	7.9	15.5	0	7.6		50	10		4.56
20406	32	35	7.7	15.4	0	7.7		25	5		10.59
20407	40	42	9	18	0	9			5	1	17.19
20408	50	54	11.1	20.5	0	9.4				1	21.75

Geberit Mapress Carbon Steel pipe bridge

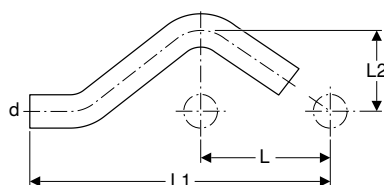

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
20801	10	12	6	16.4	3.2		25	5	3.92
20802	12	15	6	16.5	3.2		100	10	4.35
20803	15	18	6	16.6	3.3		50	10	4.73
20804	20	22	6	16.8	3.5	3200	50	10	5.46
20805	25	28	6	17.9	3.8		50	10	6.74

T-pieces

Geberit Mapress Carbon Steel T-piece, equal (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
51332	12	15	6.4	3.9	3.2	1.2	1.9	1	11.50
51333	15	18	6.8	4.1	3.4	1.4	2.1	1	13.03
51334	20	22	7.4	4.4	3.7	1.6	2.3	1	15.05
51335	25	28	8.4	5	4.2	1.9	2.7	1	18.91
51336	32	35	10	5.7	5	2.4	3.1	1	27.75
51337	40	42	11.4	6.5	5.7	2.7	3.5	1	41.42
51338	50	54	13.8	7.7	6.9	3.4	4.2	1	52.71
51341	65	76.1	23	11	11.5	6.2	5.7	1	243.81
51342	80	88.9	26	12.7	13	7	6.7	1	282.66
51343	100	108	31	15.3	15.5	8	7.8	1	400.02

Geberit Mapress Carbon Steel T-piece, reduced (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
51356	15 / 12 / 15	18	15	18	6.8	4.2	3.4	3.4	1.4	2.2	1.4	1	12.78
51357	20 / 12 / 20	22	15	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6	1	14.48
51359	20 / 15 / 20	22	18	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6	1	14.48
51362	25 / 12 / 25	28	15	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	1	18.99
51364	25 / 15 / 25	28	18	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	1	18.99
51366	25 / 20 / 25	28	22	28	8.4	4.8	4.2	4.2	1.9	2.7	1.9	1	18.99
51367	32 / 12 / 32	35	15	35	10	5.1	5	5	2.4	3.1	2.4	1	26.90
51368	32 / 15 / 32	35	18	35	10	5.1	5	5	2.4	3.1	2.4	1	26.90
51369	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4	1	26.90
51370	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	1	26.90
51373	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	1	37.95
51374	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	1	37.95
51375	40 / 32 / 40	42	35	42	11.4	6.1	5.7	5.7	2.7	3.5	2.7	1	37.95
51378	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	1	49.20
51379	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	1	49.20
51380	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	1	49.20
51381	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4	1	49.20
51390	65 / 25 / 65	76.1	28	76.1	23	7.5	11.5	11.5	6.2	5.2	6.2	1	244.02
51391	65 / 32 / 65	76.1	35	76.1	23	7.9	11.5	11.5	6.2	5.3	6.2	1	244.02
51392	65 / 40 / 65	76.1	42	76.1	23	8.3	11.5	11.5	6.2	5.3	6.2	1	244.02
51393	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2	1	244.02
51396	80 / 25 / 80	88.9	28	88.9	26	8.1	13	13	7	5.8	7	1	276.89
51397	80 / 32 / 80	88.9	35	88.9	26	8.5	13	13	7	5.9	7	1	276.89
51398	80 / 40 / 80	88.9	42	88.9	26	8.9	13	13	7	5.9	7	1	276.89
51399	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7	1	276.89
51405	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8	1	377.33
51407	100 / 65 / 100	108	76.1	108	31	12.6	15.5	15.5	8	7.3	8	1	377.33
51408	100 / 80 / 100	108	88.9	108	31	13.7	15.5	15.5	8	7.7	8	1	377.33

Geberit Mapress Carbon Steel T-piece with female thread (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
51413	12 / 15 / 12	15	1/2	15	6.4	3.7	3.2	3.2	1.2	2.4	1.2	1	13.63
51414	15	18	1/2	18	6.8	3.9	3.4	3.4	1.4	2.6	1.4	1	14.16
51416	20 / 15 / 20	22	1/2	22	7.4	4	3.7	3.7	1.6	2.7	1.6	1	16.14
51417	20 / 20 / 20	22	3/4	22	7.4	4.4	3.7	3.7	1.6	2.8	1.6	1	16.14
51418	25 / 15 / 25	28	1/2	28	8.4	4.4	4.2	4.2	1.9	3.1	1.9	1	18.77
51419	25 / 20 / 25	28	3/4	28	8.4	4.7	4.2	4.2	1.9	3.2	1.9	1	18.77
51421	32 / 15 / 32	35	1/2	35	10	4.8	5	5	2.4	3.5	2.4	1	25.39
51422	32 / 20 / 32	35	3/4	35	10	5.1	5	5	2.4	3.6	2.4	1	25.39
51424	40 / 15 / 40	42	1/2	42	11.4	5.1	5.7	5.7	2.7	3.8	2.7	1	39.89
51425	40 / 20 / 40	42	3/4	42	11.4	5.4	5.7	5.7	2.7	3.9	2.7	1	39.89
51427	50 / 15 / 50	54	1/2	54	13.8	5.7	6.9	6.9	3.4	4.4	3.4	1	44.75
51428	50 / 20 / 50	54	3/4	54	13.8	6	6.9	6.9	3.4	4.5	3.4	1	55.87
51429	50	54	2	54	13.8	7.9	6.9	6.9	3.4	5.6	3.4	1	55.87
51437	65 / 20 / 65	76.1	3/4	76.1	23	7.4	11.5	11.5	6.2	5.9	6.2	1	218.97
51438	65 / 50 / 65	76.1	2	76.1	23	9.1	11.5	11.5	6.2	6.8	6.2	1	218.97
51440	80 / 20 / 80	88.9	3/4	88.9	26	8	13	13	7	6.5	7	1	237.76
51441	80 / 50 / 80	88.9	2	88.9	26	9.7	13	13	7	7.4	7	1	237.76
51443	100 / 20 / 100	108	3/4	108	31	9	15.5	15.5	8	7.5	8	1	345.66

Geberit Mapress Carbon Steel T-piece with female thread and plain ends



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--


Characteristics

- Outside zinc-plated

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	H [cm]	H1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21341	15	18	1/2	18	10	3.4	5	5	2.1	25	5	1	8.81
21342	20 / 15 / 20	22	1/2	22	10	3.6	5	5	2.3	50	10	1	9.62
21343	25 / 15 / 25	28	1/2	28	10	4.3	5	5	3		10	1	11.22
21344	32 / 15 / 32	35	1/2	35	11.4	4.7	5.7	5.7	3.4		10	1	15.56
21345	40 / 15 / 40	42	1/2	42	13.4	5	6.7	6.7	3.7		10	1	24.22
21346	50 / 15 / 50	54	1/2	54	14.6	5.7	7.3	7.3	4.4	25	5	1	26.15

Adaptors, permanent

Geberit Mapress Carbon Steel adaptor with weld-on and plain end



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Not zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	d1, ø [mm]	s [mm]	s1 [mm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
12412	12	15	17.2	1.2	2.3	12	3	25	5		6.84
12413	15	18	21.3	1.2	2.9	12	3	25	5		7.05
12414	20	22	26.9	1.5	4	12	3.4	25	5		7.65
12415	25	28	33.7	1.5	4.4	12	3.4	25	5		9.87
12416	32	35	42.4	1.5	5.2	12	4	25	5		10.86
12417	40	42	48.3	1.5	4.7	12	4.5	24	4		13.89
12418	50	54	60.3	1.5	4.7	12	5	24	4		17.12
12419	65	76.1	76.1	2	3.7	12	7	15	5	1	20.92
12420	80	88.9	88.9	2	4.1	12	7.5	5		1	26.18
12421	100	108	114.3	2	5.2	12	9	5		1	31.83

Geberit Mapress Carbon Steel adaptor with male thread (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R [°]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
51453	12 / 15	15	1/2	4.1	2.1	1	9.25
51454	12 / 20	15	3/4	4.3	2.6	1	9.25
51455	15	18	1/2	4.2	2.2	1	10.61
51458	20	22	3/4	4.4	2.3	1	11.40
51461	25	28	1	4.8	2.5	1	15.70
51464	32	35	1 1/4	5.3	2.7	1	20.01
51466	40	42	1 1/2	5.7	2.7	1	23.75
51468	50	54	2	7.1	3.6	1	36.53

Geberit Mapress Carbon Steel adaptor with male thread and plain end



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21930	10	12	3/8	4.8				1	7.62
21931	10 / 15	12	1/2	5.5				1	7.62
21932	12 / 15	15	1/2	5.7		50	10		7.62
21933	15	18	1/2	5.7		50	5		8.61
21934	15 / 20	18	3/4	5.9			5	1	8.61
21935	20 / 15	22	1/2	5.7		50	5		8.95
21936	20	22	3/4	5.9		50	10		8.95
21937	25	28	1	6.6		50	10		12.02
21938	32	35	1 1/4	8	400		5	1	15.46
21939	40	42	1 1/2	9.1				1	17.70
21940	50	54	2	10.2			5	1	26.74

Geberit Mapress Carbon Steel adaptor with female thread (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51484	12 / 15	15	1/2	3.7	0.4	1	9.25
51486	15	18	1/2	3.7	0.4	1	10.61
51488	20 / 15	22	1/2	3.8	0.3	1	11.60
51489	20	22	3/4	3.9	0.3	1	11.60
51490	20 / 25	22	1	4.2	0.4	1	11.60
51491	25 / 15	28	1/2	3.8	0.2	1	15.70
51492	25 / 20	28	3/4	3.8	0.1	1	15.70
51493	25	28	1	4.4	0.4	1	15.70
51495	32	35	1 1/4	4.9	0.4	1	20.43
51498	40	42	1 1/2	5.3	0.4	1	24.27
51500	50	54	2	6.2	0.5	1	37.26

Geberit Mapress Carbon Steel adaptor with female thread and plain end



Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Outside zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
21907	10	12	3/8	5.4	4.4				1	7.62
21901	10 / 15	12	1/2	5.8	4.5			5	1	7.62
21908	12 / 10	15	3/8	7.4	6			5	1	7.25
21902	12 / 15	15	1/2	6.1	4.8		50	10		7.62
21903	15	18	1/2	6.1	4.8		50	10		8.34
21904	15 / 20	18	3/4	6.4	4.9			5	1	8.34
21905	20 / 15	22	1/2	6.2	4.9	6400	100	20		8.88
21906	20	22	3/4	6.5	5		25	5		8.88
21910	25 / 15	28	1/2	7.1	5.6			5	1	10.63
21912	32 / 15	35	1/2	7.7	5.2			5	1	15.46
21914	40 / 15	42	1/2	8.1	5.7			5	1	18.05
21916	50 / 15	54	1/2	8.6	6.2			5	1	23.21
21918	65 / 15	76.1	1/2	10.5	8.7				1	59.92
21920	80 / 15	88.9	1/2	11.5	10.2				1	79.91
21922	100 / 15	108	1/2	12.7	11.4				1	117.26

Geberit Mapress Carbon Steel elbow adaptor 90° with male thread (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51532	25	28	1	5.8	5.4	3.5	1	20.53

Geberit Mapress Carbon Steel elbow adaptor 90° with female thread (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
51552	25	28	1	5.8	5.4	3.5	3.6	1	22.94

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit Mapress Carbon Steel union (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51772	12	15	3/4	6.6	2.6	1	24.56
51773	15	18	3/4	6.9	2.9	1	28.27
51774	20	22	1	7.2	3	1	35.10
51775	25	28	1 1/4	7.7	3.1	1	56.48
51776	32	35	1 1/2	8.2	3	1	77.16
51777	40	42	1 3/4	9.5	3.5	1	111.12
51778	50	54	2 3/8	11.3	4.3	1	184.31

Geberit Mapress Carbon Steel adaptor union with male thread (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
51562	12 / 15	15	1/2	3/4	6.1	4.1	1	12.37
51564	15	18	1/2	3/4	6.1	4.1	1	14.14
51567	20	22	3/4	1	6.8	4.7	1	17.45
51570	25	28	1	1 1/4	7.5	5.2	1	27.09
51571	32	35	1 1/4	1 1/2	8	5.4	1	36.54
51572	40	42	1 1/2	1 3/4	8.5	5.5	1	58.23
51573	50	54	2	2 3/8	9.7	6.2	1	130.19

Geberit Mapress Carbon Steel adaptor union with female thread (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Adaptor made of gunmetal
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green


Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51611	12 / 15	15	1/2	3/4	5.8	2.3	1	13.52
51613	15	18	1/2	3/4	5.8	2.3	1	14.84
51615	20	22	3/4	1	6.3	2.3	1	20.34
51617	25	28	1	1 1/4	7.1	3.3	1	29.28
51618	32	35	1 1/4	1 1/2	7.7	3.5	1	41.62
51619	40	42	1 1/2	1 3/4	8.2	3.1	1	60.55
51620	50	54	2	2 3/8	9.5	3.4	1	132.50



Geberit Mapress Carbon Steel adaptor with union nut (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics


- Pressing indicator
- Outside zinc-plated
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51653	12	15	3/4	13	3.7	1.1	1	7.69
51656	15	18	3/4	13	3.7	1.1	1	8.06
51661	20	22	1	20	4	1.1	1	11.25
51665	25	28	1 1/4	26	4.4	1.3	1	15.28
51667	32	35	1 1/2	32	4.8	1.3	1	23.50

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes

- Suitable exclusively for liquid media

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	19.52
22431	12	20	15	6.7	5.2	10	2	22.77
22422	15	16	18	6.4	4.9	10	2	21.17
22432	15	20	18	6.7	5.2	10	2	24.42
22423	20	16	22	6.8	5.9	10	2	22.77
22433	20	20	22	6.8	5.9	10	2	26.02
22444	25	25	28	6.8	5.9	10	2	35.78



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Carbon Steel flange PN 10/16, with pressing socket (FKM, blue)

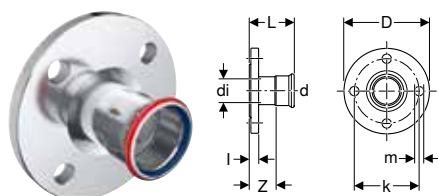

Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
51675	25	28	25	11.5	85	14	6.9	1.8	4.6	4	10 / 16		1	62.00
51676	32	35	32	14	100	18	7.2	1.8	4.6	4	10 / 16		1	91.67
51677	40	42	39	15	110	18	7.9	1.8	4.9	4	10 / 16		1	106.30
51678	50	54	51	16.5	125	18	8.7	1.8	5.2	4	10 / 16		1	139.18
51679	65	76.1	72	18.5	145	18	11.8	1.8	6.5	4	10 / 16	75	1	211.00
51680	80	88.9	84.8	20	160	18	12.5	2	6.5	8	10 / 16		1	250.91
51681	100	108	103.9	22	180	18	13	2	5.5	8	10 / 16		1	315.14

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress Carbon Steel flange PN 6, with plain end

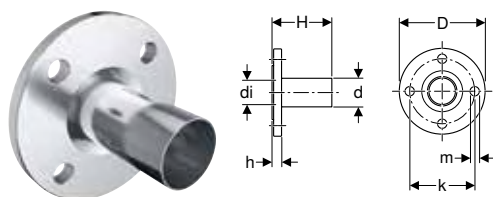

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data


Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23764	20	22	19	9	65	11	7.5	1.4	4	6		1	53.70
23765	25	28	25	10	75	11	7.7	1.4	4	6		1	67.08
23766	32	35	32	12	90	14	8.6	1.4	4	6		1	90.59
23767	40	42	39	13	100	14	10.4	1.4	4	6		1	107.38
23768	50	54	51	14	110	14	10.9	1.4	4	6	96	1	140.89
23769	65	76.1	72	16	130	14	13.2	1.4	4	6	75	1	181.20
23770	80	88.9	84.8	19	150	18	14.8	1.6	4	6	75	1	221.45
23771	100	108	103.9	21	170	18	16.1	1.6	4	6	75	1	261.69

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171
- Geberit flange gasket PN 6 → p. 111

Geberit Mapress Carbon Steel flange PN 10/16, with plain end

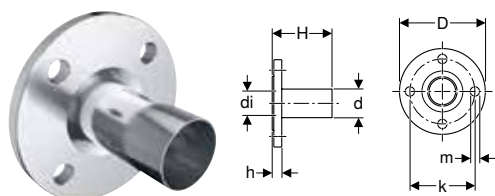

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Outside zinc-plated
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-1

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	h [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23784	20	22	19	10.5	75	14	7.9	1.8	4	10 / 16		1	52.56
23785	25	28	25	11.5	85	14	8.1	1.8	4	10 / 16		1	65.84
23786	32	35	32	14	100	18	9	1.8	4	10 / 16		1	88.91
23787	40	42	39	15	110	18	10.8	1.8	4	10 / 16		1	105.36
23788	50	54	51	16.5	125	18	11.3	1.8	4	10 / 16		1	138.20
23789	65	76.1	72	18.5	145	18	13.6	1.8	4	10 / 16	75	1	177.91
23790	80	88.9	84.8	20	160	18	15.2	2	8	10 / 16	75	1	217.25
23791	100	108	103.9	22	180	18	16.5	2	8	10 / 16	75	1	256.87

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171
- Geberit flange gasket PN 10/16 → p. 112

Sealings

Geberit Mapress Carbon Steel cap (FKM, blue)



Application purposes

- For compressed air (oil purity class 3–4)
- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Carbon Steel → p. 119

Characteristics

- Pressing indicator
- Outside zinc-plated
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data



Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
51752	12	15	2.3	0.3	1	6.56
51753	15	18	2.3	0.3	1	7.95
51754	20	22	2.4	0.3	1	8.86
51755	25	28	2.6	0.3	1	10.31
51756	32	35	2.9	0.3	1	14.21
51757	40	42	3.3	0.3	1	28.15
51758	50	54	3.8	0.3	1	33.87
51761	65	76.1	6	0.7	1	56.14
51762	80	88.9	6.7	0.7	1	78.66
51763	100	108	8.2	0.7	1	117.51

Accessories for Geberit Mapress Carbon Steel

Caulks for pipes and fittings

Geberit sealing tape



Application purposes

- For protecting the pipe cross-sections of Geberit FlowFit against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Mapress system pipes and fittings against external corrosion factors

Characteristics

- UV-resistant
- Black

Technical data

Installation temperature	-10 – +50 °C
Temperature resistance	-60 – +100 °C
Product material	IIR


Art. no.	s [mm]	L [m]	B [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	12.5	3	6	1	45.96
601.815.00.1	1	12.5	5	5	1	76.56



- Attach after pressure test

Pipe covers

Geberit pipe sleeve, slit



Application purposes

- For cladding visible pipes

Characteristics


- Pure white RAL 9010

Technical data

Product material	PP
------------------	----

Art. no.	di, Ø [mm]	L [m]	SU2 [m]	GBP/m
611.605.BM.1	15–20	1	5	3.30

Geberit double collar



Application purposes

- For covering pipe feed-throughs

Characteristics

- Two-piece
- Pure white RAL 9010


Technical data

Product material	PS
------------------	----

Art. no.	a [cm]	di, Ø [mm]	L [cm]	B [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.610.BM.1	5	14 / 15 / 16 / 18 / 20	10	5	100	10	1.64

Pipe fastenings

Geberit pipe bracket, insulated, with threaded socket M8 / M10

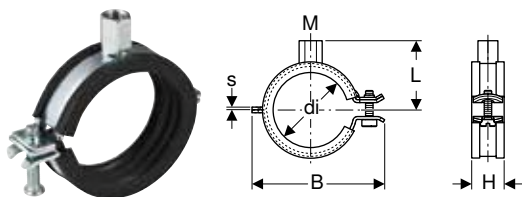

Application purposes

- For fastening Geberit system pipes for supply systems

Technical data


Product material	Steel
------------------	-------

Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Art. no.	Colour / surface	M [mm]	di, \varnothing [mm]	s [mm]	L [cm]	B [cm]	H [cm]	SU2 [pc.]	GBP/pc.
601.850.26.1	galvanized	8 / 10	12–14	1.5	2.9	4.7	2.3	50	2.13
601.851.26.1	galvanized	8 / 10	15–19	1.5	3.1	5.2	2.3	50	2.13
601.852.26.1	galvanized	8 / 10	20–24	1.5	3.4	5.6	2.3	50	2.13
601.853.26.1	galvanized	8 / 10	25–30	1.5	3.6	6.3	2.3	50	2.29
601.854.26.1	galvanized	8 / 10	32–37	1.5	3.9	6.8	2.3	50	2.46
601.855.26.1	galvanized	8 / 10	40–46	2	4.3	7.6	2.3	50	2.64
601.857.26.1	galvanized	8 / 10	54–58	2	4.8	8.9	2.3	50	3.17
601.858.26.1	galvanized	8 / 10	63–67	2	5.5	10	2.3	50	4.22
601.859.26.1	galvanized	8 / 10	74–80	2	6.4	11.9	2.3	50	4.41
601.860.26.1	galvanized	8 / 10	83–91	2	6.8	13	2.3	50	4.59
601.861.26.1	galvanized	8 / 10	108–114	2.5	8.1	15.3	2.8	25	5.28

Geberit double nipple M10 / G 1/2"



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Technical data


Product material	Steel
------------------	-------

Characteristics

- Reduced
- Zinc-plated

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.71

Geberit threaded rod



Application purposes


- For building drainage
- For fastening Geberit pipe brackets to base plates
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

Characteristics

- Zinc-plated

Art. no.	Colour / surface	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.834.26.1	galvanized	10	200	25	1	16.27

Geberit threaded pipe

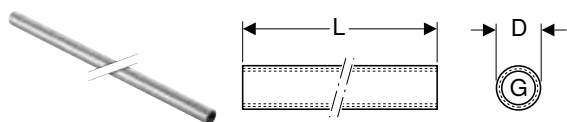

Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1.15	2	1	35.02

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics

- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.37

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	3.92

Connector fastenings

Fastening for Geberit Mapress elbow adaptor 90°

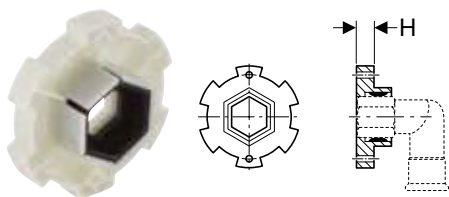

Application purposes

- For double panelling in drywall construction
- For fastening Geberit Mapress Carbon Steel elbow adaptors with female thread Rp 1/2"
- For fastening Geberit Mapress Stainless Steel elbow adaptors with female thread Rp 1/2"

Characteristics

- Sound-absorbing

Technical data

Product material	Duroplast
------------------	-----------

Art. no.	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90282	1.3	5	1	9.59

System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12		10		0.45
90402	12	15	50	10		0.45
90403	15	18	50	10		0.57
90404	20	22	50	10		0.57
90405	25	28	50	10		0.62
90406	32	35	50	10		0.62
90407	40	42		10		0.91
90408	50	54		10		0.91
90412	65	66.7		5		1.98
90409	65	76.1			1	2.52
90410	80	88.9			1	3.44
90411	100	108			1	6.67

Geberit Mapress seal ring, FKM, blue



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics


- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 – +180 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	2.64
90882	12	15	100	10	1.12
90883	15	18	100	10	1.35
90884	20	22	100	10	1.61
90885	25	28	100	10	1.90
90886	32	35	100	10	2.21
90887	40	42	100	10	4.06
90888	50	54	100	10	5.68
90891	65	76.1	50	5	16.76
90892	80	88.9	50	5	20.84
90893	100	108	25	5	46.48

Geberit Mapress flat gasket, EPDM, black



Application purposes


- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.32
90081	3/4	24	13	2	50	10	0.32
90082	1	30	19.6	2		10	0.32
90083	1 1/4	39	25.6	2		10	0.51
90084	1 1/2	45	32	2		10	0.70
90085	1 3/4	50	39	2		10	0.83
90086	2 3/8	66	51	3		10	1.71

Geberit Mapress flat gasket, FPM, green

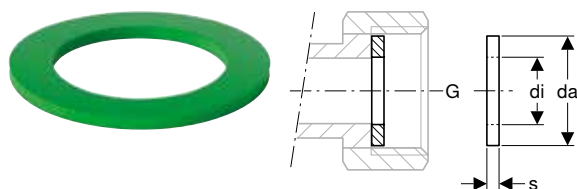

Application purposes


- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	FPM

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.82
90094	1	30	19.6	2	10	3.22
90095	1 1/4	39	25.6	2	10	1.39
90096	1 1/2	45	32	2	10	1.71
90097	1 3/4	50	39	2	10	2.42
90098	2 3/8	66	51	2	10	4.42

Geberit Mapress flat gasket Centellen® R WS 3825

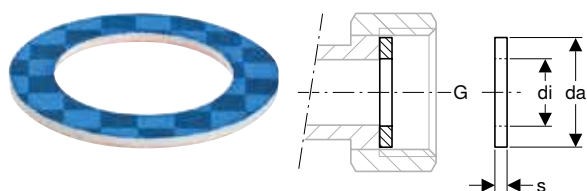

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +150 °C
Product material	Centellen® R WS 3825

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.021.00.1	1/2	18	10	2	5	1.35
600.022.00.1	3/4	24	13	2	5	1.39
600.023.00.1	1	30	20	2	5	1.42
600.024.00.1	1 1/8	35	21	2	5	1.69
600.025.00.1	1 1/4	39	26	2	5	1.77
600.026.00.1	1 1/2	45	32	2	5	1.82
600.027.00.1	1 3/4	51	39	2	5	1.93
600.028.00.1	2	56	42	2	5	2.05
600.029.00.1	2 1/4	63	42	2	5	2.11
600.030.00.1	2 3/8	66	51	2	5	2.27
600.031.00.1	2 1/2	72	54	2	5	2.57
600.032.00.1	2 3/4	78	57	2	5	3.11
600.033.00.1	3	85	72	2	5	3.39
600.034.00.1	3 1/2	97	85	2	5	3.82

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	44	20	2	6	1	2.23
91042	20	54	25	2	6	1	2.74
91043	25	64	30	2	6	1	3.24
91044	32	76	38	2	6	1	4.00
91045	40	86	45	2	6	1	5.02
91046	50	96	57	2	6	1	5.75
91047	65	116	76	2	6	1	6.49
91048	80	132	89	2	6	1	8.76
91049	100	152	108	2	6	1	9.99

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91031	15	50	20	2	10 / 16		1	1.77
91032	20	60	25	2	10 / 16	5	1	2.15
91033	25	70	30	2	10 / 16	5	1	2.56
91034	32	82	38	2	10 / 16	5	1	3.15
91035	40	92	45	2	10 / 16	5	1	3.93
91036	50	107	57	2	10 / 16	5	1	4.50
91037	65	127	76	2	10 / 16	5	1	5.10
91038	80	142	89	2	10 / 16	5	1	6.29
91039	100	162	108	2	10 / 16	5	1	7.88

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of zinc-plated steel



Application purposes

- For flanges made of carbon steel, gunmetal and brass

Technical data

Product material	Steel
------------------	-------


Characteristics

- Zinc-plated
- Strength class 8.8, EN 20898-2

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	2.49
91065	10	11	5	3.6	4	2.49
91066	12	14	5	3	4	2.49
91067	12	14	5.5	3.5	4	2.49
91068	12	14	6	4	4	2.49
91069	16	18	5.5	3.3	4	2.49
91070	16	18	6	3.8	4	2.49
91071	16	18	6.5	4.3	4	2.49
91072	16	18	7	4.8	4	2.49
91073	16	18	8	5.8	4	2.49

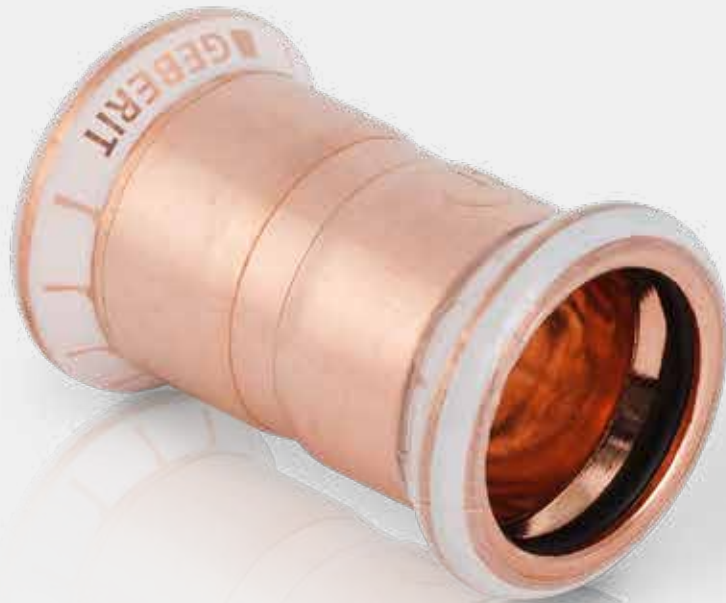

Geberit Mapress Copper

Preliminary remarks.....	175
Application overview – Geberit Mapress Copper.....	177
Geberit Mapress Copper	178
Couplings	178
Reducers.....	179
Bends	180
T-pieces.....	182
Pipe crosses	184
Adaptors, permanent.....	185
Adaptors and connections, detachable.....	189
Sealings.....	195
Connections	196
T-pieces for heating.....	199
Connections for heating.....	200
Geberit Mapress Copper, gas.....	204
Couplings	204
Reducers.....	205
Bends	206
T-pieces.....	208
Adaptors, permanent.....	209
Adaptors and connections, detachable.....	211
Sealings.....	212
Connections	213
Geberit Mapress Copper, FKM, blue.....	214
Couplings	214
Reducers.....	215
Bends	216
T-pieces.....	218
Adaptors, permanent.....	219
Adaptors and connections, detachable.....	221
Sealings.....	223
Accessories for Geberit Mapress Copper.....	223
Insulations for connectors.....	223
Caulks for pipes and fittings.....	224
Pipe covers	225
Pipe fastenings.....	225
Connector fastenings	227
System seals.....	230
Sets of bolts for flange connections.....	234



Preliminary remarks

Introduction to Geberit Mapress Copper

Geberit Mapress Copper is especially suited for potable water installations as well as for open and closed heating and cooling circuits. There are special fittings available for gas installations, as well as solar and industrial applications.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

In addition to copper pressfittings, the Geberit Mapress Copper product range includes fittings made of gunmetal and brass.

Benefits of Geberit Mapress Copper

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Hygienic

Meets the requirements of DVGW W 270 regarding microbiological safety

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. See page 158 - 159 for an in depth overview of the applications for Geberit Mapress Copper.

Ensure you are using the correct pipe for Geberit Mapress Copper. BS EN 1057 copper pipe is suitable to press with Geberit Mapress Copper fittings. Please see the Geberit Mapress Installation Guide for more information.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress Copper

Geberit Great Britain, Version: December 2022

Application purposes	Operating temperature	Maximum operating pressure	Pipes	Fittings				
			Copper	Copper	Gunmetal	Brass	Carbon steel, copper-plated	
Liquid media								
For cold and hot potable water	0–100 °C	16 bar / 1600 kPa ⁴⁾	✓	✓	✓			
For cooling and heating water without antifreeze agent	0–100 °C	16 bar / 1600 kPa	✓	✓	✓	✓		✓
For cooling and heating water with antifreeze agent	-30 – +120 °C	16 bar / 1600 kPa	✓	✓	✓	✓		✓
For district heating water ≤ 120 °C	0–120 °C	16 bar / 1600 kPa	✓	✓	✓	✓		
For service water and process water	0–100 °C	16 bar / 1600 kPa	6)	6)	6)	6)		
For thermal media (solar)	-25 – +220 °C ²⁾³⁾	10 bar / 1000 kPa	✓	✓	✓	✓		
For mineral and lubricating oil	Upon request	Upon request	6)	6)	6)			
For motor fuels (e.g. diesel)	Upon request	Upon request	6)	6)	6)			
Gaseous media								
For compressed air (oil purity class 0–3)	0–100 °C	12 bar / 1200 kPa ⁵⁾	✓	✓	✓			
For compressed air (oil purity class 0–X)	0–100 °C	12 bar / 1200 kPa ⁵⁾	✓	✓	✓			
For negative pressure ¹⁾	0–100 °C	Abs. ≥ 0,2 bar/20 kPa	✓	✓	✓			
For inert gases (e.g. nitrogen)	0–100 °C	12 bar / 1200 kPa ⁵⁾	✓	✓	✓	✓		
For natural gases	-20 – +70 °C	MOP 5 / GT 1	✓	✓	✓	✓		
For liquefied gases	-20 – +70 °C	MOP 5 / GT 1	✓	✓	✓	✓		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

²⁾ Lifetime with collector standstill: 200 h/a at 180 °C; 60 h/a at 200 °C; total 500 h/lifetime at 220 °C

³⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

⁴⁾ 10 bar / 1000 kPa for MasterFix and MeplaFix

⁵⁾ Approved up to d54 mm

⁶⁾ Following Geberit approval

⁷⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

	Seal rings				Flat gaskets for screw connections				Flange gaskets
	CIIR, black	EPDM, black	FKM, blue	HNBR, yellow	EPDM, black	FPM, green	Centellen® R WS 3825	Centellen® HD WS 3822	Centellen® HD WS 3822
	✓	✓			✓				✓
	✓ ³⁾	✓			✓				✓
	✓ ³⁾						✓		✓
	✓ ³⁾	✓				✓	✓		✓
	6)	6)			6)		6)		6)
			✓			✓			✓
			6)			6)			6)
			6)			6)			6)
	✓ ⁷⁾				✓ ⁷⁾				✓
			✓ ⁷⁾			✓ ⁷⁾			✓
	✓	✓							✓
	✓				✓				✓
				✓				✓	✓
				✓				✓	✓



Geberit Mapress Copper

Couplings

Geberit Mapress Copper coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62001	10	12	4.2	0.8	16000	200	20		2.65
62002	12	15	4.8	0.8	12800	200	20		3.00
62003	15	18	4.8	0.8		100	20		3.77
62004	20	22	5	0.8	8000	200	20		4.52
62005	25	28	5.4	0.8	5000	100	20		8.22
62006	32	35	6.2	1	3200	100	5		10.85
62007	40	42	7.1	1.1	1920	48	4		19.40
62008	50	54	8.3	1.3	768	48	4		24.06
62010	65	66.7	12.7	2.7	400	25	5		60.60
62011	65	76.1	12.7	2.1	240			1	78.09
62012	80	88.9	14.5	2.5	144			1	88.95
62013	100	108	17.6	2.6	80			1	131.57

Geberit Mapress Copper coupling, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62050	12 / 10	15	12	4	0.3	25	5		12.48
62055	20 / 12	22	15	4.4	0.3		5	1	12.91

Geberit Mapress Copper slip coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62102	12	15	2.5	8	3		100	20		15.87
62103	15	18	2.5	8	3		50	10		17.90

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62104	20	22	2.5	8.4	3.4		100	20		18.34
62105	25	28	3	9.1	3.1		50	10		21.89
62106	32	35	3	10.2	4.2		50	5		29.11
62107	40	42	4	12	4		48	4		40.26
62108	50	54	4	14	6		24	4		43.32
62110	65	66.7	5	22	12		5		1	88.67
62111	65	76.1	5.3	23	12.4				1	113.08
62112	80	88.9	6	26	14	96			1	152.74
62113	100	108	7.5	31	16	50			1	179.36

Reducers

Geberit Mapress Copper reducer with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Concentric
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62301	12 / 10	15	12	5	3.3		100	20		2.65
62302	15 / 10	18	12	5.4	3.7		50	10		2.65
62303	15 / 12	18	15	5.5	3.5		100	20		2.84
62305	20 / 12	22	15	5.9	3.9		200	20		3.26
62306	20 / 15	22	18	5.7	3.7		100	20		3.26
62307	25 / 12	28	15	6.6	4.6		100	10		8.09
62308	25 / 15	28	18	6.4	4.4		50	10		8.09
62309	25 / 20	28	22	6	3.9		200	20		8.09
62312	32 / 20	35	22	7.1	5			50	10	10.41
62313	32 / 25	35	28	6.8	4.5	3200	100	5		10.41
62316	40 / 20	42	22	8.1	6		24	4		17.05
62317	40 / 25	42	28	7.9	5.6		48	4		17.05
62318	40 / 32	42	35	7.6	5		48	4		17.05
62322	50 / 25	54	28	9.7	7.4		24	4		22.25
62323	50 / 32	54	35	9.6	7		48	4		22.25
62324	50 / 40	54	42	9.2	6.1	1536	48	4		22.25
62325	65 / 25	66.7	28	12	9.7				1	67.26
62326	65 / 32	66.7	35	12.1	9.5				1	67.26
62327	65 / 40	66.7	42	12.1	9.1		5		1	67.26
62328	65 / 50	66.7	54	12.7	9.2	720	5		1	79.16
62329	65 / 32	76.1	35	12.6	10				1	90.46
62330	65 / 40	76.1	42	12.6	9.6	264			1	90.46
62331	65 / 50	76.1	54	14.6	11.1				1	90.46
62332	65 / 65	76.1	66.7	15.1	10.1				1	90.46
62333	80 / 40	88.9	42	14	11				1	111.48
62334	80 / 50	88.9	54	16.2	12.8	144			1	111.48
62336	80 / 65	88.9	76.1	16.1	10.8	144			1	111.48
62337	100 / 40	108	42	17.3	14.3	144			1	135.10
62338	100 / 50	108	54	17.3	13.8	96			1	135.10
62339	100 / 65	108	66.7	18.9	13.9	96			1	146.71
62340	100 / 65	108	76.1	18.4	13.1	96			1	146.71
62341	100 / 80	108	88.9	20.3	14.3				1	146.71



- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress Copper – April 2022 to April 2023' overview

Bends

Geberit Mapress Copper bend

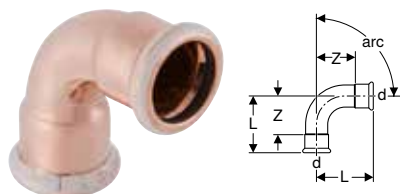

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
60601	10	12	2.6	0.9		50	10		2.84
60602	12	15	2.8	0.8		100	20		2.96
60603	15	18	2.9	0.9		100	20		4.02
60604	20	22	3.2	1.1	6000	200	20		4.94
60605	25	28	3.7	1.4		100	10		9.94
60606	32	35	4	1.4		100	5		20.55
60607	40	42	4.7	1.7			48	4	38.80
60608	50	54	5.7	2.2	768	48	4		53.94
60610	65	66.7	9.2	4.2		5		1	115.14
60611	65	76.1	10.3	5				1	150.10
60612	80	88.9	11.7	5.7				1	185.04
60613	100	108	14.3	6.8				1	226.18
arc / angle: 90°									
60101	10	12	3.1	1.4	12800	200	20		2.84
60102	12	15	3.8	1.8	8000	200	20		2.96
60103	15	18	4.2	2.2	8000	200	20		4.02
60104	20	22	4.7	2.6	5600	140	20		4.94
60105	25	28	5.7	3.4	3000	100	10		9.94
60106	32	35	6.5	3.9	2000	50	5		20.55
60107	40	42	7.6	4.6	1200	50	2		38.80
60108	50	54	9.5	6	480	30	2		53.94
60110	65	66.7	14.1	9.1	320	10		1	98.69
60111	65	76.1	15.9	10.6	144			1	156.26
60112	80	88.9	18.5	12.5				1	185.04
60113	100	108	23	15.5	32			1	285.80

Geberit Mapress Copper bend with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, \varnothing [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°										
60701	10	12	2.6	3.5	0.9		50	10		2.84
60702	12	15	2.8	3.8	0.8	9600	200	20		2.96
60703	15	18	2.9	3.9	0.9		100	20		4.02

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60704	20	22	3.2	4.4	1.1	6000	200	20		4.94
60705	25	28	3.7	4.5	1.2		100	10		9.94
60706	32	35	4	4.9	1.4		50	10		20.55
60707	40	42	4.7	5.7	1.7		48	4		38.80
60708	50	54	5.7	6.8	2.2	768	48	4		53.94
60710	65	66.7	9.2	10.1	4.2				1	135.68
60711	65	76.1	10.3	11.1	5				1	156.26
60712	80	88.9	11.7	12.8	5.7				1	185.04
60713	100	108	14.3	15.8	6.8				1	226.18
arc / angle: 90°										
60301	10	12	3.1	4.5	1.4		50	10		2.84
60302	12	15	3.8	5.1	1.8	9600	200	20		2.96
60303	15	18	4.2	5.3	2.2		100	20		4.02
60304	20	22	4.7	6	2.6	5600	140	20		4.94
60305	25	28	5.7	6.5	3.4		100	10		9.94
60306	32	35	6.5	7.4	3.9		50	5		20.55
60307	40	42	7.6	8.6	4.6	768	48	4		38.80
60308	50	54	9.5	10.6	6		24	4		53.94
60310	65	66.7	14.1	15	9.1		5		1	115.14
60311	65	76.1	15.9	16.7	10.6				1	156.26
60312	80	88.9	18.5	19.5	12.5				1	185.04
60313	100	108	23	24.1	15.5				1	285.80



Geberit Mapress Copper bend with plain ends



Application purposes

- Application overview – Geberit Mapress Copper → p. 177


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
60905	25	28	4.3	11.9	0	7.6			1	9.59
60906	32	35	4.1	11.8	0	7.7			1	17.93
60907	40	42	4.7	13.7	0	9			1	29.54
60908	50	54	5.5	14.9	0	9.4			1	40.15
arc / angle: 30°										
60935	25	28	4.8	12.4	0	7.6			1	9.59
60936	32	35	4.6	12.3	0	7.7			1	17.93
60937	40	42	5.4	14.4	0	9			1	29.54
60938	50	54	6.3	15.7	0	9.4			1	40.15
arc / angle: 45°										
60875	25	28	4.5	11.8	0	7.3			1	9.59
60876	32	35	4.9	12.6	0	7.7			1	17.93
60877	P	40	42	5.7	14.7	0	9		1	29.54
60878	50	54	6.8	16.2	0	9.4			1	40.15
arc / angle: 60°										
60955	25	28	6.1	13.7	0	7.6			1	9.59
60956	32	35	5.9	13.6	0	7.7			1	17.93
60957	40	42	6.9	15.9	0	9			1	29.54
60958	P	50	54	8.3	17.7	0	9.4		1	40.15
arc / angle: 90°										
60082	12	15	5.1	11.8	0	6.7	50	10		8.25
60083	15	18	5.3	12.2	0	6.9		5	1	8.44
60084	20	22	6	12.8	0	6.8	25	5		8.72
60085	25	28	6.5	14	0	7.5	25	5		9.59
60086	32	35	7.4	15.1	0	7.7			1	17.93
60087	40	42	8.6	17.6	0	9			1	29.54
60088	50	54	10.6	20	0	9.4			1	40.15

P: Phase out

Geberit Mapress Copper pipe bridge

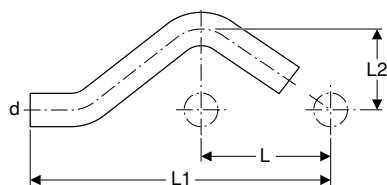

Application purposes

- Application overview – Geberit Mapress Copper → p. 177


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60801	10	12	4	15.4	3.4			1	7.32
60802	12	15	6	16.5	3.2	25	5		11.22
60803	15	18	6	16.6	3.3		5	1	10.90
60804	20	22	6	16.8	3.5		5	1	19.69

T-pieces

Geberit Mapress Copper T-piece, equal



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61000	10	12	6.2	3.1	3.1	1.4	1.4		50	10		4.68
61002	12	15	6.4	3.1	3.2	1.2	1.2	6400	100	20		5.06
61003	15	18	6.8	3.4	3.4	1.4	1.4		100	20		6.60
61004	20	22	7.4	3.7	3.7	1.6	1.6		100	20		8.16
61005	25	28	8.4	4.2	4.2	1.9	1.9		50	10		14.47
61006	32	35	10	5.9	5	2.4	3.3	1600	50	10		24.72
61007	40	42	11.4	6.6	5.7	2.7	3.6	640	40	4		48.87
61008	50	54	13.8	7.8	6.9	3.4	4.3	320	20	2		62.67
61010	65	66.7	22	10.5	11	6	5.5		5		1	193.61
61011	65	76.1	23	11	11.5	6.2	5.7				1	271.39
61012	80	88.9	26	12.7	13	7	6.7	32			1	289.80
61013	100	108	31	15.3	15.5	8	7.8				1	370.09

Geberit Mapress Copper T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug

Art. no.	DN	d, \varnothing [mm]	d1, \varnothing [mm]	d2, \varnothing [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61243	12 / 10 / 10	15	12	12	6.7	3.3	3.2	3.5	2	1.6	1.7		25	5		7.32
61252	12 / 10 / 12	15	12	15	6.4	3.3	3.2	3.2	1.2	1.6	1.2		50	10		4.68
61104	12 / 20 / 12	15	22	15	7.4	3.4	3.7	3.7	1.7	1.3	1.7			5	1	7.32
61253	15 / 10 / 15	18	12	18	6.8	3.5	3.4	3.4	1.4	1.8	1.4		50	10		6.11
61235	15 / 12 / 12	18	15	15	7.4	3.5	3.4	4	1.4	1.5	2		50	10		6.60
61254	15 / 12 / 15	18	15	18	6.8	3.5	3.4	3.4	1.4	1.5	1.4		50	10		6.60
61236	15 / 15 / 12	18	18	15	7.4	3.4	3.4	4	1.4	1.4	2			5	1	6.60
61244	20 / 10 / 20	22	12	22	7.4	3.5	3.7	3.7	2.1	1.7	2.1		50	10		8.25
61240	20 / 12 / 12	22	15	15	8	3.8	3.7	4.3	1.6	1.8	2.3	4000	50	10		7.32
61256	20 / 12 / 20	22	15	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6	4000	100	20		7.32
61257	20 / 15 / 20	22	18	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6		50	10		7.32
61242	20 / 20 / 12	22	22	15	7.4	3.7	3.7	4.5	1.6	1.6	2.5	4000	50	10		13.08
61259	25 / 12 / 25	28	15	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9	3200	50	10		14.47
61260	25 / 15 / 25	28	18	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9		50	10		14.47
61261	25 / 20 / 25	28	22	28	8.4	4.1	4.2	4.2	1.9	2	1.9		50	10		14.47
61212	32 / 12 / 32	35	15	35	10	5.1	5	5	2.4	3.1	2.4	1600	50	10		24.57
61213	32 / 15 / 32	35	18	35	10	5	5	5	2.4	3	2.4			5	1	26.23
61214	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4	1600	50	10		24.57
61215	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	1600	50	10		24.57
61229	40 / 12 / 40	42	15	42	11.4	5.4	5.7	5.7	2.7	3.4	2.7	1200	24	4		45.84
61217	40 / 15 / 40	42	18	42	11.4	5.4	5.7	5.7	2.7	3.4	2.7				1	45.84
61218	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	768	48	4		45.84
61219	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	768	48	4		45.84
61220	40 / 32 / 40	42	35	42	11.4	6.2	5.7	5.7	2.7	3.6	2.7	768	48	4		45.84
61227	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	480	30	2		74.89
61228	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	500	10	2		74.89
61225	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4		24	2		74.89
61226	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4	500	10	2		74.89
61280	65 / 20 / 65	66.7	22	66.7	22	6.5	11	11	6	4.4	6	250	5		1	201.86
61281	65 / 25 / 65	66.7	28	66.7	22	6.8	11	11	6	4.5	6	250	5		1	201.86
61282	65 / 50 / 65	66.7	54	66.7	22	8.2	11	11	6	4.7	6		5		1	201.86
61283	65 / 20 / 65	76.1	22	76.1	23	7.2	11.5	11.5	6.2	5.1	6.2	144			1	231.23
61284	65 / 32 / 65	76.1	35	76.1	23	7.9	11.5	11.5	6.2	5.3	6.2	144			1	231.23
61285	65 / 40 / 65	76.1	42	76.1	23	8.3	11.5	11.5	6.2	5.3	6.2	144			1	231.23
61286	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2				1	231.23
61287	65 / 65 / 65	76.1	66.7	76.1	23	11	11.5	11.5	6.2	6	6.2				1	231.23
61288	80 / 20 / 80	88.9	22	88.9	26	7.8	13	13	7	5.7	7	144			1	282.74
61289	80 / 40 / 80	88.9	42	88.9	26	8.9	13	13	7	5.9	7	96			1	282.74
61290	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7				1	282.74
61292	80 / 65 / 80	88.9	76.1	88.9	26	11.6	13	13	7	6.3	7				1	282.74
61293	100 / 20 / 100	108	22	108	31	8.8	15.5	15.5	8	6.7	8	50			1	308.44
61294	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8	50			1	308.44
61295	100 / 65 / 100	108	66.7	108	31	12.6	15.5	15.5	8	7.6	8	50			1	349.50
61296	100 / 65 / 100	108	76.1	108	31	12.6	15.5	15.5	8	7.3	8	50			1	349.50
61297	100 / 80 / 100	108	88.9	108	31	13.7	15.5	15.5	8	7.7	8				1	349.50



Geberit Mapress Copper T-piece with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61352	10 / 15 / 10	12	1/2	12	6.8	2.4	3.4	3.4	1.7	1.1	1.7			5	1	14.76
61354	12 / 15 / 12	15	1/2	15	6.8	2.6	3.4	3.4	1.4	1.3	1.4		100	20		14.76
61355	15	18	1/2	18	8.2	2.4	4.1	4.1	2.1	1.1	2.1		50	10		14.76
61357	20 / 15 / 20	22	1/2	22	8.4	2.6	4.2	4.2	2.1	1.3	2.1	3200	50	10		20.21
61395	20	22	3/4	22	9	2.7	4.5	4.5	2.4	1.2	2.4		25	5		20.21
61359	25 / 15 / 25	28	1/2	28	8.8	2.9	4.4	4.4	2.1	1.6	2.1	2000	50	10		29.74
61360	25 / 20 / 25	28	3/4	28	8.4	3.5	4.2	4.2	1.9	2	1.9		25	5		29.74
61362	32 / 15 / 32	35	1/2	35	10	3.5	5	5	2.4	2.2	2.4		50	5		36.16
61366	40 / 15 / 40	42	1/2	42	11.4	3.8	5.7	5.7	2.7	2.5	2.7		24	4		44.39
61370	50 / 15 / 50	54	1/2	54	13.8	4.4	6.9	6.9	3.4	3.1	3.4		20	2		53.94

Pipe crosses

Geberit Mapress Copper pipe cross 30°, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61404	15 / 12	18	15	6.8	4.2	3.4	1.4	2.2	10	1	32.07
61406	20 / 12	22	15	7.4	4.4	3.7	1.6	2.4	5	1	33.93
61409	25 / 12	28	15	8.4	4.7	4.2	1.9	2.7	10	1	41.41

Geberit Mapress Copper pipe cross, reduced, offset



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
61504	12	15	15	10.8	10.8	2.5	5.4	5.4	3.4	3.4	1	32.07
61505	15 / 12	18	15	10.8	10.8	2.5	5.4	5.4	3.4	3.4	1	32.07
61506	20 / 12	22	15	10.8	11	2.5	5.4	5.5	3.4	3.4	1	33.93

Adaptors, permanent

Geberit Mapress Copper adaptor socket



Application purposes

- For connecting copper pipe diameters alien to the system
- For transitions from copper pipes to mild steel pipes
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- ø 14 mm to be pressed with Geberit Mapress pressing jaw ø 15 mm
- ø 16 mm should be pressed with the Geberit Mapress pressing jaw ø 18 mm
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
62020	12	15	14	4.1	0.1		5	1	22.63
62022	12	15	16	4.1	0.1	25	5		22.63
62024	15	18	16	4.1	0.1			1	22.63

New

Geberit FlowFit adaptor to Geberit Mapress, with plain end

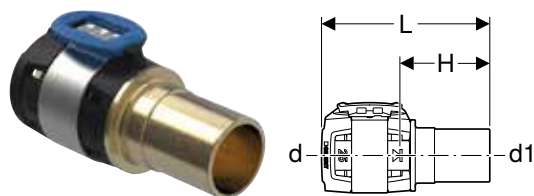

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77 GBP
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77 GBP
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01 GBP
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01 GBP
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01 GBP
620.232.00.1	20	25	22	7	3.7	25	5		13.91 GBP
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93 GBP
620.234.00.1	32	40	35	8	4.4	25	5		22.24 GBP
620.235.00.1	40	50	42	12.8	6.9	10			150.07 GBP
620.236.00.1	50	63	54	13.8	7.5	5			177.86 GBP

Available as of April 2023

Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	3.4		50	10	1	11.93
602.507.00.5	15 / 12	20	15	6.1	3.4		50	10	1	11.93
602.508.00.5	15	20	18	6.1	3.4		50	10		11.93
602.509.00.5	15 / 20	20	22	6.2	3.5		50	10	1	11.93
603.508.00.5	20	26	22	6.7	3.5		25	5		18.60
604.508.00.5	25	32	28	6.6	3.7		25	5		21.06
605.508.00.5	32	40	35	7.5	4.1		25	5		26.31
606.508.00.5	40	50	42	10.1	6.3		10		1	52.00
607.508.00.5	50	63	54	13.6	7	180	10		1	80.07

Geberit Mapress Copper adaptor with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed up to ø ≤ 54 mm
- Seal ring made of CIIR, black, up to ø ≤ 54 mm
- Seal ring made of EPDM, black, from ø > 54 mm
- Pressing socket with transparent protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61701	10	12	3/8	3.2	1.5		50	10		3.96
61745	10 / 15	12	1/2	3.6	1.9		50	10		3.96
61702	12 / 10	15	3/8	3.3	1.3		50	10		4.14
61703	12 / 15	15	1/2	3.6	1.6	9600	200	20		4.14
61714	12 / 20	15	3/4	3.8	1.8		50	10		4.14
61704	15	18	1/2	3.7	1.7		100	20		4.23
61705	15 / 20	18	3/4	3.8	1.8		100	20		4.23
61715	20 / 15	22	1/2	3.8	1.7		100	20		7.09
61707	20	22	3/4	3.9	1.8		200	20		7.09
61716	20 / 25	22	1	4.1	2	3200	100	20		7.09
61717	25 / 20	28	3/4	4.2	1.9		100	20		15.61
61708	25	28	1	4.3	2	4800	100	20		15.61
61718	25 / 32	28	1 1/4	4.4	2.1		50	10		15.61
61719	32 / 25	35	1	4.8	2.2		50	10		31.45
61709	32	35	1 1/4	4.9	2.3		50	10		31.45
61721	40 / 32	42	1 1/4	5.8	2.8		48	4		41.90
61710	40	42	1 1/2	5.8	2.8		48	4		41.90
61711	50	54	2	6.3	2.8		48	4		85.80
61730	65	66.7	2 1/2	9.7	4.7	400	5		1	181.35
61732	65	76.1	2 1/2	10.1	4.8				1	308.44
61733	65 / 80	76.1	3	10.6	5.3				1	308.44
61734	80	88.9	3	11	5				1	366.58

Geberit Mapress Copper adaptor with male thread and plain end



Application purposes


- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	3.48
61933	15	18	1/2	5.7		1	4.23
61935	20 / 15	22	1/2	5.7		1	6.49
61936	20	22	3/4	5.9	5	1	6.49

Geberit Mapress Copper adaptor with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61845	10	12	3/8	3.1	0.4		25	5	3.96
61801	10 / 15	12	1/2	3.5	0.5		50	10	3.96
61846	12 / 10	15	3/8	3.3	0.3		50	10	4.14
61802	12 / 15	15	1/2	3.8	0.5	9600	200	20	4.14
61823	12 / 20	15	3/4	3.9	0.4		50	10	4.14
61803	15	18	1/2	3.7	0.4		100	20	4.23
61804	15 / 20	18	3/4	3.9	0.4		50	10	4.23
61805	20 / 15	22	1/2	3.6	0.2		50	10	7.09
61806	20	22	3/4	3.9	0.3	8000	100	20	7.09
61824	20 / 25	22	1	4.3	0.5		50	10	7.09
61819	25 / 20	28	3/4	3.9	0.3		50	10	15.61
61809	25	28	1	4.5	0.5	5000	100	10	15.61
61825	25 / 32	28	1 1/4	4.8	0.6		25	5	15.61
61820	32 / 25	35	1	4.6	0.3		50	5	31.45
61811	32	35	1 1/4	5	0.5		50	5	31.45
61821	40 / 32	42	1 1/4	5.2	0.3		24	4	41.90
61814	40	42	1 1/2	5.4	0.5		48	4	41.90
61818	50	54	2	6.3	0.5		24	4	85.80

Geberit Mapress Copper adaptor with female thread and plain end



Application purposes


- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63558	12 / 15	15	1/2	4.6	3.3	5	1	5.20
63559	15	18	1/2	4.6	3.3		1	6.31
63560	15 / 20	18	3/4	4.8	3.3		1	6.31
63561	20 / 15	22	1/2	4.6	3.3	5	1	10.15
63562	20	22	3/4	4.9	3.4	5	1	10.15
63564	32 / 25	35	1	6.3	4.6		1	34.33
63565	50	54	2	8.5	6.2		1	48.01

Geberit Mapress Copper elbow adaptor 90° with male thread

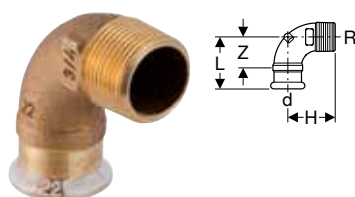

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63892	10	12	3/8	3	2.5	1.3			1	14.23
63893	10 / 15	12	1/2	3.2	3.1	1.5			1	14.23
63894	12 / 10	15	3/8	3.2	2.7	1.2			1	15.59
63873	12 / 15	15	1/2	3.5	3.1	1.5	50	10		15.59
63884	15	18	1/2	3.5	3.4	1.5	25	5		19.51
63895	15 / 20	18	3/4	3.8	3.3	1.8		5	1	19.51
63885	20	22	3/4	4.8	4.4	2.7	50	10		25.13
63886	25	28	1	5.8	5.3	3.5	25	5		34.24
63887	32	35	1 1/4	5.5	4.7	2.9			1	52.71
63888	40	42	1 1/2	6.2	5.1	3.2			1	86.08
63889	50	54	2	7	6.3	3.5			1	109.76

Geberit Mapress Copper elbow adaptor 90° with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63860	10	12	3/8	3.2	2.3	1.5	1.3			1	13.85
63861	10 / 15	12	1/2	3.4	2.4	1.7	1.1			1	13.85

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63862	12 / 10	15	3/8	3.3	2.4	1.3	1.4			1	15.59
63853	12 / 15	15	1/2	3.6	2.7	1.6	1.4	50	10		15.59
63854	15	18	1/2	3.6	3	1.6	1.7	25	5		19.51
63863	15 / 20	18	3/4	3.8	3.1	1.8	1.6			1	19.51
63864	20 / 15	22	1/2	3.8	3.2	1.7	1.9			1	25.13
63855	20	22	3/4	4.5	2.7	2.4	1.2	25	5		25.13
63856	25	28	1	5.1	3.3	2.8	1.6	25	5		32.78
63857	32	35	1 1/4	5.5	4.5	2.9	2.6			1	52.71
63865	40	42	1 1/2	6.7	5.2	3.7	3.3			1	86.08
63866	50	54	2	7.4	6	3.9	3.7			1	109.76

Adaptors and connections, detachable

Geberit adaptor with male thread MF 1/2" and male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
632.007.00.1	15	1/2	1/2	4.2	10	1	12.19
632.008.00.1	20 / 15	1/2	3/4	4.2	10	1	16.65

Geberit adaptor with male thread MF 1/2" and female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Flat gasket made of Centellen® R WS 3825

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	G ["]	L [cm]	L1 [cm]	I1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
632.006.00.1	15	1/2	1/2	3.8	2.3	0.8	50	10	8.29

Geberit Mapress adaptor with MasterFix



Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61110	12 / 15	15	1/2	5.4	1.8	50	5	30.12

Geberit Mapress adaptor with MasterFix and plain end



Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- O-ring made of EPDM
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61112	12 / 15	15	1/2	5.6	4	30	5	40.39

Geberit Mapress elbow adaptor 90° with MasterFix

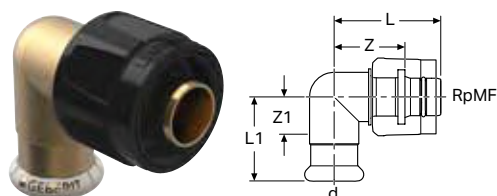

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing socket with transparent protection plug
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61120	12 / 15	15	1/2	4.4	3.3	2.8	1.4	50	5	52.56

Geberit Mapress elbow adaptor 90° with MasterFix and plain end

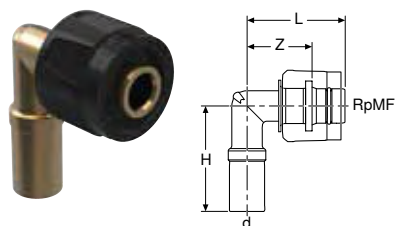

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- O-ring made of EPDM
- MasterFix with blue protective cap

Technical data

Maximum operating pressure	10 bar
Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
61121	12 / 15	15	1/2	4.4	4.5	2.8	30	5	55.12

Geberit Mapress Copper adaptor union with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65531	10	12	3/8	1/2	5.1	3.4		5	1	20.50
65540	10 / 15	12	1/2	1/2	5.5	3.8		5	1	20.50
65532	12 / 15	15	1/2	3/4	6.1	4.1	50	5		28.41
65541	12 / 20	15	3/4	3/4	6.3	4.3		5	1	22.12
65533	15	18	1/2	3/4	6.1	4.1	50	5		25.34
65542	15 / 20	18	3/4	3/4	6.3	4.3	25	5		25.34
65534	20 / 15	22	1/2	1	6.7	4.6		5	1	26.39
65543	20	22	3/4	1	6.8	4.7	50	5		42.03
65544	20 / 25	22	1	1	6.9	4.8	25	5		26.39
65535	25	28	1	1 1/4	7.5	5.2	25	5		44.65
65536	32	35	1 1/4	1 1/2	8	5.4	25	5		51.52
65537	40	42	1 1/2	1 3/4	8.5	5.5	24	4		68.67
65538	50	54	2	2 3/8	9.7	6.2	10		1	114.04

Geberit Mapress Copper adaptor union with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65481	10 / 15	12	1/2	1/2	5.2	2.2			1	20.50
65482	12 / 15	15	1/2	3/4	5	1.7	25	5		28.41
65490	12 / 20	15	3/4	3/4	5.9	2.4			1	22.12
65483	15	18	1/2	3/4	5	1.7		5	1	25.34
65491	15 / 20	18	3/4	3/4	5.9	2.4		5	1	25.34
65484	20	22	3/4	1	6.2	2.6	50	5		42.03
65492	20 / 25	22	1	1	6.6	2.8		5	1	26.39
65485	25	28	1	1 1/4	6.3	2.3	25	5		44.65
65486	32	35	1 1/4	1 1/2	7.5	3	25	5		51.52
65487	40	42	1 1/2	1 3/4	7.9	3		5	1	68.67
65488	50	54	2	2 3/8	8.5	2.7		5	1	114.04

Geberit Mapress Copper elbow adaptor union 90° with female thread

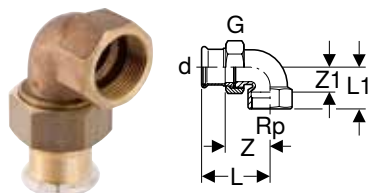

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp [°]	G [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
65382	12 / 15	15	1/2	3/4	5.7	3.2	3.7	1.9	1	32.21
65392	15	18	1/2	3/4	5.7	3.2	3.7	1.9	1	33.52
65384	20	22	3/4	1	6.4	3.6	4.3	2.1	1	45.05
65385	25	28	1	1 1/4	7.2	4.4	4.9	2.7	1	48.87
65386	32	35	1 1/4	1 1/2	8	5	5.4	3.1	1	65.62
65387	40	42	1 1/2	1 3/4	8.7	5.3	5.7	3.4	1	92.54
65388	50	54	2	2 3/8	10.1	6.4	6.6	4.1	1	127.27

Geberit Mapress Copper adaptor with union nut



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Union nut made of brass
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	G [°]	di, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
65081	10	12	1/2	10	3.2	0.9			1	7.65
65182	12	15	1/2	10	5.1	2.5	50	5		8.25
65082	12	15	3/4	13	3.7	1.1	50	10		8.25
65083	15	18	3/4	13	3.7	1.1	50	10		8.72
65040	15	18	1	20	3.9	1.3			1	8.72
65084	20	22	1	20	4	1.1	50	10		13.42
65044	20	22	1 1/4	26	4.3	1.3		5	1	13.42
65045	20	22	1 1/2	32	4.4	1.3		5	1	13.42
65046	25	28	1	20	5.5	1.3	25	5		13.56
65085	25	28	1 1/4	26	4.4	1.3	50	10		13.56
65050	25	28	1 1/2	32	4.6	1.3		5	1	13.56
65086	32	35	1 1/2	32	4.8	1.3	50	10		15.81
65051	32	35	2	42	4.8	1.2			1	25.31
65087	40	42	1 3/4	39	5.2	1.3	24	4		30.02
65052	40	42	2	42	5.4	1.4			1	30.02
65053	40	42	2 1/4	42	5.6	1.4			1	30.02
65088	50	54	2 3/8	51	5.8	1.5	24	4		42.78
65054	50	54	2 1/2	54	6.3	1.4			1	42.78
65090	65	76.1	3	73	9.1	2.5			1	383.24
65091	80	88.9	3 1/2	84	9.8	2.4			1	383.24

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes

- Suitable exclusively for liquid media

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, \varnothing [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	19.52
22431	12	20	15	6.7	5.2	10	2	22.77
22422	15	16	18	6.4	4.9	10	2	21.17
22432	15	20	18	6.7	5.2	10	2	24.42
22423	20	16	22	6.8	5.9	10	2	22.77
22433	20	20	22	6.8	5.9	10	2	26.02
22444	25	25	28	6.8	5.9	10	2	35.78



- If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Geberit Mapress Copper flanged stub with plain end, for loose flange PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	di, \varnothing [mm]	D [cm]	H [cm]	h [cm]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
63706	25	28	25.2	6.8	8.1	0.2	10 / 16		1	189.04
63707	32	35	32	7.8	9.3	0.2	10 / 16		1	216.57
63708	40	42	39	8.8	10.9	0.2	10 / 16		1	244.47
63709	50	54	51	10.2	10.9	0.2	10 / 16		1	303.18
63710	65	66.7	62.7	12.2	14.2	0.2	10 / 16	96	1	236.73
63711	65	76.1	72.1	12.2	14.5	0.2	10 / 16	96	1	253.87
63712	80	88.9	84.9	13.8	15.2	0.2	10 / 16		1	297.00
63713	100	108	104	15.8	17.4	0.3	10 / 16		1	369.09


To order additionally

- Geberit Mapress loose flange PN 10/16 → p. 195

Accessories

- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress loose flange PN 10/16



Application purposes

- For Geberit Mapress Copper flanged stubs with plain end

Characteristics

- Zinc-plated

Technical data

Product material	Non-alloy steel 1.0215 E220 (EN 10305)
------------------	--


Art. no.	DN	di, \varnothing [mm]	D [cm]	k [mm]	m [mm]	H [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
23715	25	31	11.5	85	14	1.6	4	10 / 16		1	72.19
23716	32	39	14	100	18	1.6	4	10 / 16		1	82.24
23717	40	47	15	115	18	1.6	4	10 / 16		1	90.34
23718	50	59	16.5	125	18	1.6	4	10 / 16		1	98.91
23719	65	82	18.5	145	18	1.6	4	10 / 16	192	1	75.04
23720	80	96	20	160	18	1.8	8	10 / 16		1	93.18
23721	100	119	22	180	18	1.8	8	10 / 16		1	123.15

Accessories

- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171

Sealings

Geberit Mapress Copper cap



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54$ mm
- Seal ring made of CIIR, black, up to $\varnothing \leq 54$ mm
- Seal ring made of EPDM, black, from $\varnothing > 54$ mm
- Pressing socket with transparent protection plug


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60231	10	12	2	0.3	50	10		5.51
60232	12	15	2.3	0.3	100	20		5.79
60233	15	18	2.3	0.3	50	10		7.22
60234	20	22	2.5	0.4	50	10		9.64
60235	25	28	2.7	0.4	50	10		14.24
60236	32	35	3	0.4	25	5		16.70
60237	40	42	3.4	0.4		5	1	25.81
60238	50	54	3.9	0.4		5	1	33.62
60239	65	66.7	5.9	0.9			1	76.34
60240	65	76.1	6.4	1.1			1	88.11
60241	80	88.9	7.1	1.1			1	107.03
60242	100	108	8.6	1.1			1	146.24

Connections

Geberit tap connector, straight, with male thread MF 1/2"

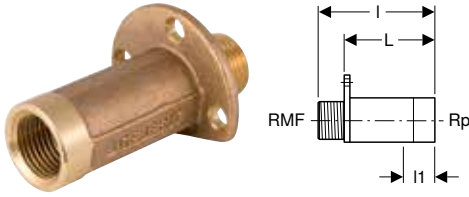

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Volex

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	I [cm]	I1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 5.7 cm									
602.283.00.1	15	1/2	1/2	7.9	2.7	50	10	1	17.57

Accessories

- Geberit sound insulation base for tap connector, straight → p. 224

Geberit set of tap connector, straight, with male thread MF 1/2", premounted, drywall construction

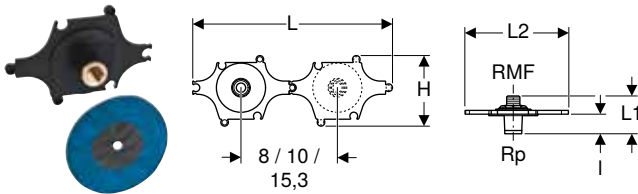

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Scope of delivery

- Tap connector, straight
- Insulating sleeve
- Drilling template
- Sealing washer
- Fastening material

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
602.295.00.1	15	1/2	1/2	31.6	6	16.5	3.1	11	20	2	28.46

Accessories

- Geberit mounting aid set for straight connector, for drywall construction → p. 230

Geberit Mapress Copper elbow tap connector 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
L1 / length: 3.6 cm													
63458	10 / 15	12	1/2	3.4	1.8	1.8	1.7				5	1	24.20
63459	12 / 15	15	1/2	3.8	1.8	1.8	1.8	3200	50	10			17.18
63460	15	18	1/2	3.8	1.8	1.8	1.8		25	5			26.14
L1 / length: 5.2 cm													
63452	10 / 15	12	1/2	3.4	1.8	3.4	1.7			25	5		26.13
63453	12 / 15	15	1/2	3.4	1.8	3.4	1.4	3200	50	10			17.18
63455	15	18	1/2	3.4	1.8	3.4	1.4				5	1	26.07
63457	20	22	3/4	3.7	2.2	3	1.6			25	5		28.70

Characteristics

- Pressing indicator
- Leaky if unpressed
- Three fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug



Geberit Mapress Copper double elbow tap connector 90°

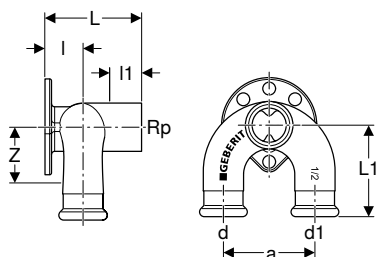

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	a [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L / length: 5.2 cm											
63462	12	15	1/2	15	5	5	1.8	2.4	3	1	52.70
63463	15	18	1/2	18	5	5	2	2.4	3	1	57.73
63464	20	22	1/2	22	5	5	1.8	2.4	2.9	1	64.16

Characteristics

- Pressing indicator
- Leaky if unpressed
- Four fastening points
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Geberit elbow tap connector 90° with male thread MF 1/2"

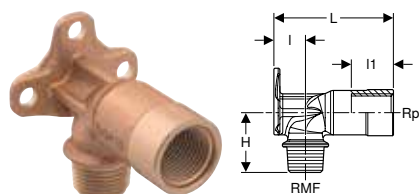

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	l [cm]	l1 [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 5.7 cm										
602.285.00.1	15	1/2	1/2	1.8	2.6	3.5	2500	50	10	13.27
L / length: 7.3 cm										
602.287.00.2	15	1/2	1/2	1.8	3	3.5		50	10	16.20

Accessories

- Geberit sound insulation set for single elbow tap connector 90° → p. 103

Geberit Mapress Copper elbow tap connector 90°, premounted, double

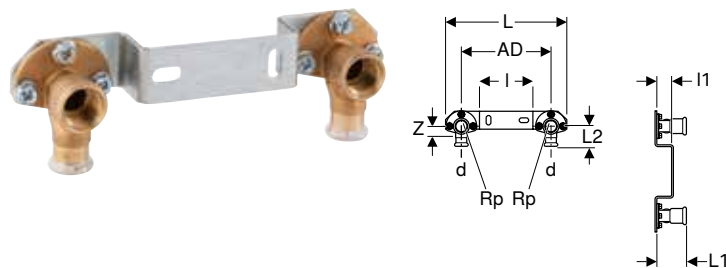

Application purposes

- For potable water
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	L [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 3.6 cm												
63473	12	15	1/2	15.3	20.5	3.8	9	1.8	1.8	10	1	58.65

Geberit elbow tap connector 90° with male thread MF 1/2", premounted, single, short

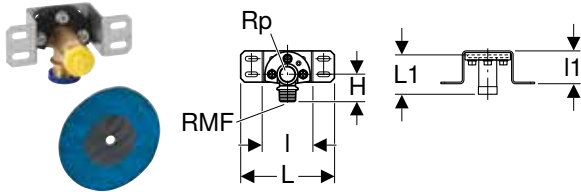

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery

- Sealing washer
- Protection plug
- Fastening material


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	L [cm]	l [cm]	l1 [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.7 cm										
632.856.00.1	15	1/2	1/2	12	6.5	4	3.5	10	1	43.00

T-pieces for heating

Geberit Mapress T-piece crossing with insulation box

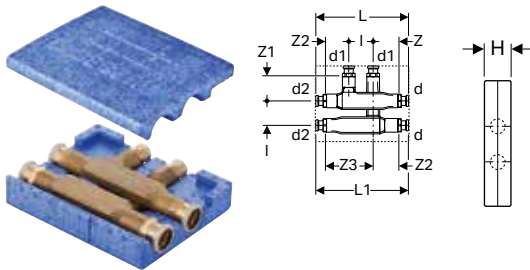

Application purposes

- For connecting to two parallel pipes without intersecting
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	DR brass CC752S
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Art. no.	DN	d, Ø [mm]	d1, Ø [mm]	d2, Ø [mm]	L [cm]	L1 [cm]	l [cm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63113	12 / 12 / 12	15	15	15	19	19	5	5	4.8	5.2	5.3	9.8	5	1	34.30
63115	15 / 12 / 15	18	15	18	19	19	5	5	4.8	5.2	5.3	9.8	5	1	99.73
63117	20 / 12 / 20	22	15	22	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	104.45
63118	20 / 15 / 20	22	18	22	19.2	19.2	5	5	4.8	5.2	5.3	9.8	5	1	104.45

Connections for heating

Geberit Mapress metal pipe connector bend 90° with insulation box and union connector for Euro cone

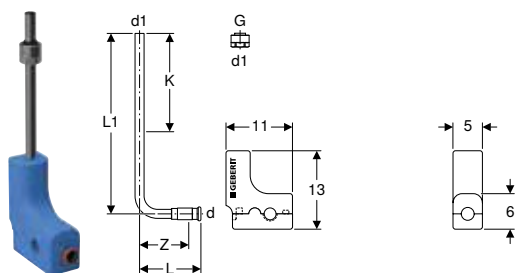

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connector bend 90°, made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63126	12 / 20	15	3/4	15	10.2	30	8.2	17	20	2	15.10



- Tighten the union as far as it will go

Geberit Mapress metal pipe connector T-piece with insulation box and union connector for Euro cone

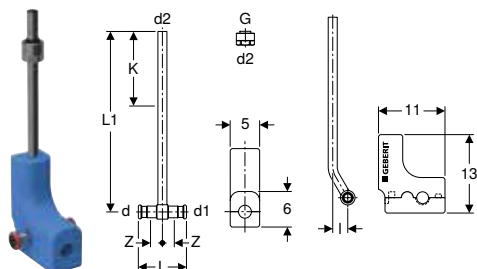

Application purposes

- For connecting radiator valves
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Two-piece insulation box

Scope of delivery


- Metal pipe connection T-piece made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
63127	12 / 20 / 12	15	3/4	15	15	8	30	2.5	2	17	20	2	53.96
63128	15 / 20 / 15	18	3/4	18	15	9.4	30	2.5	2.7	17	20	2	56.82



- Tighten the union as far as it will go

Geberit Mapress type C connection box

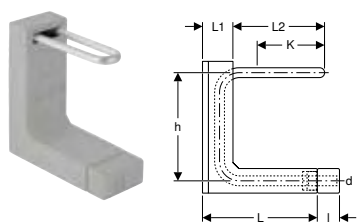

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	EPS
Insulation thickness	13 mm
Thermal conductivity, insulation	0.031 W/(m·K)

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
63108	12	15	5	22.3	6.3	17.6	4.5	10.5	27	5	22	13.6	80	10	1	36.21

Geberit Mapress type L connection box

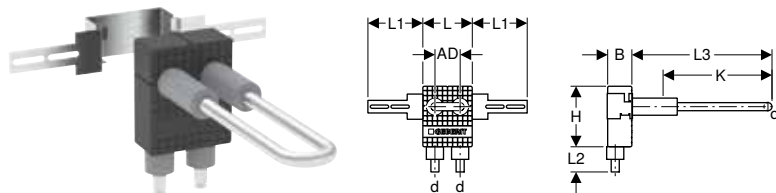

Application purposes

- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- System pipe, outside nickel-plated
- For pressure test without radiator

Technical data



Product material	Cu-DHP copper CW024A (EN 1412)
Material, insulation	PUR
Insulation thickness	7 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Scope of delivery

- Installation sheet

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	B [cm]	H [cm]	K [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63109	12	15	5	10	11	5	25	5	12	21	160	10	1	47.22

Geberit Mapress Copper connector T-piece set for return flow

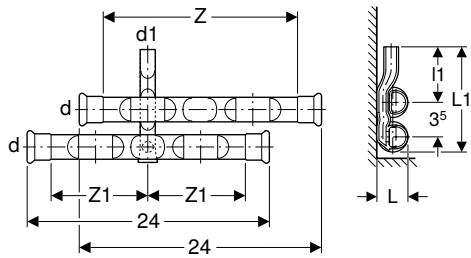

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with long connection
- Socket, offset, long

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
23615	12	15	15	2.7	10.8	6.5	20	10	1	50.02
23617	20 / 12	22	15	3.3	11.2	6.5	20	10	1	59.80

Geberit Mapress Copper set of connector T-pieces for inlet and return flow

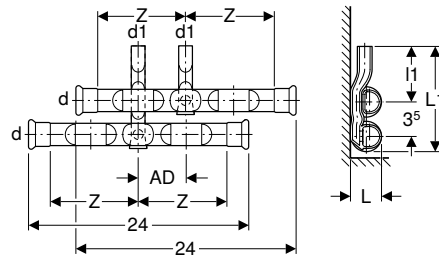

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Characteristics


- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection

Art. no.	DN	d, ø [mm]	d1, ø [mm]	AD [cm]	L [cm]	L1 [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
24005	12	15	15	4-6	2.7	10.8	6.5	10	1	49.04
24006	15 / 12	18	15	4-6	2.9	11	6.5	10	1	50.09
24007	20 / 12	22	15	4-6	3.3	11.2	6.5	10	1	58.61

Geberit Mapress Copper set of connector T-pieces for inlet and return flow, with union connector for Euro cone

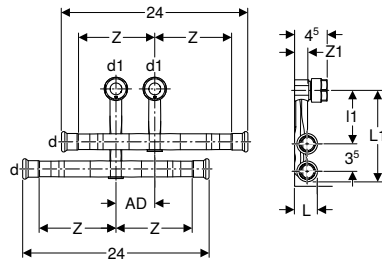

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Characteristics


- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Outside copper-plated
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Union connector for Geberit Mapress Stainless Steel 1.4401 system pipes
- Union connector for Geberit Mapress Carbon Steel system pipes
- Union connector for copper pipes, rough, nickel-plated and chrome-plated
- Installation completely in front of the wall

Art. no.	DN	d, \emptyset [mm]	d1, \emptyset [mm]	AD [cm]	L [cm]	L1 [cm]	I1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
24055	12	15	15	5	2.7	12.6	6.8	10	1.7	1	93.92
24056	15 / 12	18	15	5	2.9	12.7	6.8	10	1.7	1	96.70
24057	20 / 12	22	15	5	3.3	13	6.8	9.9	1.7	1	100.94



- Tighten the union as far as it will go

Geberit metal pipe bend with plain ends 90° with union connector for Euro cone



Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, \emptyset [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.601.22.3	12 / 20	15	3/4	13	10	7.5	4.5	20	2	7.39



- Tighten the union as far as it will go

Geberit metal pipe elbow 90°, lockable, with union connector for Euro cone

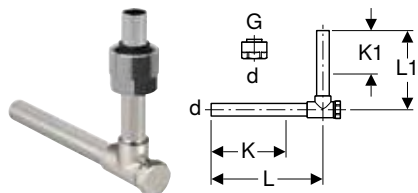

Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data

Product material	Brass / copper
------------------	----------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.603.22.3	12 / 20	15	3/4	12.5	10	8	5.5	50	10	2	24.07



- Tighten the union as far as it will go

**Geberit Mapress Copper, gas
Couplings**

Geberit Mapress Copper coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34601	12	15	4.8	0.8	50	5		3.63
34602	15	18	4.8	0.8	50	5		4.56
34603	20	22	5	0.8	100	5		5.51
34604	25	28	5.4	0.8	50	5		10.09
34605	32	35	6.2	1	25	5		12.62
34606	40	42	7.1	1.1	24	4		22.51
34607	50	54	8.3	1.3		5	1	27.98

Geberit Mapress Copper slip coupling (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34608	12	15	2.5	8	3	5	1	19.29
34609	15	18	2.5	8	3		1	21.77
34610	20	22	2.5	8.4	3.4	5	1	22.30
34611	25	28	3	9.1	3.1		1	26.69
34612	32	35	3	10.2	4.2		1	33.78
34613	40	42	4	12	4		1	46.73
34614	50	54	4	14	6		1	50.27

Reducers

Geberit Mapress Copper reducer with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Concentric
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34615	15 / 12	18	15	5.5	3.5		5	1	3.46
34616	20 / 12	22	15	5.9	3.9	50	5		4.01
34617	20 / 15	22	18	5.7	3.7	25	5		4.01
34618	25 / 12	28	15	6.6	4.6		5	1	10.99
34619	25 / 15	28	18	6.4	4.4		5	1	9.87
34620	25 / 20	28	22	6	3.9	50	5		9.87
34623	32 / 20	35	22	7.1	5		5	1	12.09
34624	32 / 25	35	28	6.8	4.5		5	1	12.08
34625	40 / 25	42	28	7.9	5.6		5	1	19.75
34626	40 / 32	42	35	7.6	5		5	1	19.75
34627	50 / 25	54	28	11	8.7			1	25.80
34628	50 / 32	54	35	9.6	7			1	25.80
34629	50 / 40	54	42	9.2	6.2			1	25.80

Bends

Geberit Mapress Copper bend (gas)

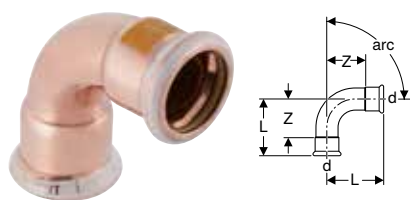

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34514	12	15	2.8	0.8		50	5		3.62
34515	15	18	2.9	0.9		25	5		4.90
34516	20	22	3.2	1.1	4000	50	5		6.00
34517	25	28	3.7	1.4		50	5		12.09
34518	32	35	4	1.4			5	1	23.87
34519	40	42	4.7	1.7			5	1	44.99
34520	50	54	5.7	2.2			5	1	62.57
arc / angle: 90°									
34500	12	15	3.8	1.8	8000	100	5		3.62
34501	15	18	4.2	2.2		100	5		4.90
34502	20	22	4.7	2.6	5000	100	5		6.00
34503	25	28	5.7	3.4	3200	100	5		12.09
34504	32	35	6.5	3.9		50	5		23.87
34505	40	42	7.6	4.6		24	4		44.99
34506	50	54	9.5	6		24	4		62.57

Geberit Mapress Copper bend with plain end (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
34521	12	15	2.8	3.8	0.8	50	5		4.01
34522	15	18	2.9	3.9	0.9	50	5		4.47
34523	20	22	3.2	4.4	1.1	50	5		5.50
34524	25	28	3.7	4.5	1.4	50	5		11.02
34525	32	35	4	4.9	1.4		5	1	21.77
34526	40	42	4.7	5.7	1.7			1	41.10
34527	50	54	5.7	6.8	2.2			1	57.10
arc / angle: 90°									
34507	12	15	3.8	5.1	1.8	50	5		3.62
34508	15	18	4.2	5.3	2.2	50	5		4.90
34509	20	22	4.7	6	2.6	100	5		6.00
34510	25	28	5.7	6.5	3.4	50	5		12.09
34511	32	35	6.5	7.4	3.9	5		1	23.87

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34512	40	42	7.6	8.6	4.6		5	1	44.99
34513	50	54	9.5	10.6	6		5	1	62.57

Geberit Mapress Copper bend with plain ends



Application purposes

- Application overview – Geberit Mapress Copper → p. 177


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
60905	25	28	4.3	11.9	0	7.6			1	9.59
60906	32	35	4.1	11.8	0	7.7			1	17.93
60907	40	42	4.7	13.7	0	9			1	29.54
60908	50	54	5.5	14.9	0	9.4			1	40.15
arc / angle: 30°										
60935	25	28	4.8	12.4	0	7.6			1	9.59
60936	32	35	4.6	12.3	0	7.7			1	17.93
60937	40	42	5.4	14.4	0	9			1	29.54
60938	50	54	6.3	15.7	0	9.4			1	40.15
arc / angle: 45°										
60875	25	28	4.5	11.8	0	7.3			1	9.59
60876	32	35	4.9	12.6	0	7.7			1	17.93
60877	P	40	5.7	14.7	0	9			1	29.54
60878	50	54	6.8	16.2	0	9.4			1	40.15
arc / angle: 60°										
60955	25	28	6.1	13.7	0	7.6			1	9.59
60956	32	35	5.9	13.6	0	7.7			1	17.93
60957	40	42	6.9	15.9	0	9			1	29.54
60958	P	50	8.3	17.7	0	9.4			1	40.15
arc / angle: 90°										
60082	12	15	5.1	11.8	0	6.7	50	10		8.25
60083	15	18	5.3	12.2	0	6.9		5	1	8.44
60084	20	22	6	12.8	0	6.8	25	5		8.72
60085	25	28	6.5	14	0	7.5	25	5		9.59
60086	32	35	7.4	15.1	0	7.7			1	17.93
60087	40	42	8.6	17.6	0	9			1	29.54
60088	50	54	10.6	20	0	9.4			1	40.15

P: Phase out

Geberit Mapress Copper pipe bridge

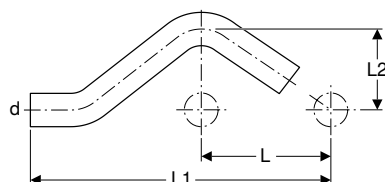

Application purposes

- Application overview – Geberit Mapress Copper → p. 177


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60801	10	12	4	15.4	3.4			1	7.32
60802	12	15	6	16.5	3.2	25	5		11.22
60803	15	18	6	16.6	3.3		5	1	10.90
60804	20	22	6	16.8	3.5		5	1	19.69

T-pieces

Geberit Mapress Copper T-piece, equal (gas)

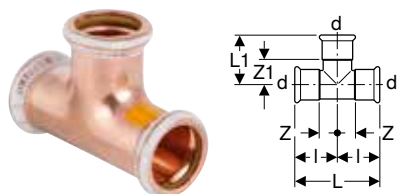

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34528	12	15	6.4	3.2	3.2	1.2	1.2	50	5		6.11
34529	15	18	6.8	3.4	3.4	1.4	1.4		5	1	8.04
34530	20	22	7.4	3.7	3.7	1.6	1.6	50	5		9.88
34531	25	28	8.4	4.2	4.2	1.9	1.9	25	5		17.57
34532	32	35	10	5.9	5	2.4	3.3		5	1	28.69
34533	40	42	11.4	6.6	5.7	2.7	3.6			1	56.71
34534	50	54	13.8	7.8	6.9	3.4	4.3			1	72.72

Geberit Mapress Copper T-piece, reduced (gas)

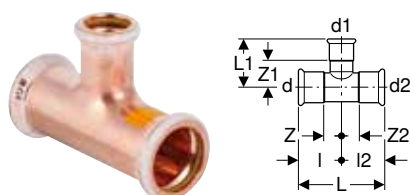

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34535	15 / 12 / 15	18	15	18	6.8	3.5	3.4	3.4	1.4	1.5	1.4			1	8.04
34553	20 / 12 / 12	22	15	15	8	3.8	3.7	4.3	1.6	1.8	2.3		5	1	8.11
34536	20 / 12 / 20	22	15	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6	25	5		8.88
34537	20 / 15 / 20	22	18	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6		5	1	8.88
34554	20 / 20 / 12	22	22	15	8.3	3.7	3.7	4.6	1.6	1.6	2.6		5	1	8.11
34588	25 / 12 / 25	28	15	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9		5	1	16.79
34589	25 / 15 / 25	28	18	28	8.4	4.1	4.2	4.2	1.9	2.1	1.9			1	16.79
34590	25 / 20 / 25	28	22	28	8.4	4.1	4.2	4.2	1.9	2	1.9		5	1	16.79
34543	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4		5	1	28.49
34544	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4			1	28.49
34545	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7			1	53.17
34546	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7			1	53.17
34547	40 / 32 / 40	42	35	42	11.4	6.2	5.7	5.7	2.7	3.6	2.7			1	53.17
34548	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4			1	86.98
34549	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4			1	86.98
34550	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4			1	86.98
34551	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4			1	86.98

Geberit Mapress Copper T-piece with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug


Technical data

Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34735	12 / 15 / 12	15	1/2	15	7.4	2.6	3.7	3.7	1.7	1.6	1.7	5	1	17.99
34736	15	18	1/2	18	7.4	2.4	3.7	3.7	1.7	1.6	1.7		1	17.99
34740	20 / 15 / 20	22	1/2	22	8	2.6	4	4	1.9	1.8	1.9	5	1	23.48
34737	20	22	3/4	22	8	2.7	4	4	1.9	2.1	1.9	5	1	24.66
34738	25 / 15 / 25	28	1/2	28	8.4	2.9	4.2	4.2	1.9	2.3	1.9	5	1	36.25
34739	25 / 20 / 25	28	3/4	28	8.4	3.5	4.2	4.2	1.9	2.1	1.9		1	36.22

Adaptors, permanent

Geberit Mapress Copper adaptor with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R [°]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34666	12 / 15	15	1/2	3.6	1.6	50	5		5.20
34675	12 / 20	15	3/4	3.8	1.8			1	5.07
34667	15	18	1/2	3.7	1.7	50	5		5.19
34676	15 / 20	18	3/4	3.8	1.8	25	5		5.19
34669	20 / 15	22	1/2	3.8	1.7	50	5		8.68
34670	20	22	3/4	3.9	1.8	100	5		8.68
34677	20 / 25	22	1	4.1	2	50	5		8.68
34678	25 / 20	28	3/4	4.2	1.9		5	1	18.99
34671	25	28	1	4.3	2	50	5		18.99
34679	32 / 25	35	1	4.8	2.2		5	1	36.51
34672	32	35	1 1/4	4.9	2.3	25	5		36.51
34673	40	42	1 1/2	5.8	2.8	24	4		48.70
34674	50	54	2	6.3	2.8		5	1	99.63

Geberit Mapress Copper adaptor with male thread and plain end



Application purposes


- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	3.48
61933	15	18	1/2	5.7		1	4.23
61935	20 / 15	22	1/2	5.7		1	6.49
61936	20	22	3/4	5.9	5	1	6.49

Geberit Mapress Copper adaptor with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34683	12 / 15	15	1/2	3.8	0.5	50	5		5.07
34693	12 / 20	15	3/4	3.9	0.4			1	5.07
34684	15	18	1/2	3.7	0.4	25	5		5.19
34685	15 / 20	18	3/4	3.9	0.4		5	1	5.19
34686	20 / 15	22	1/2	3.6	0.2	25	5		8.68
34687	20	22	3/4	3.9	0.3	50	5		8.68
34688	20 / 25	22	1	4.3	0.5	25	5		8.68
34689	25	28	1	4.5	0.5	50	5		18.99
34690	32	35	1 1/4	5	0.5		5	1	36.51
34691	40	42	1 1/2	5.4	0.5			1	48.70
34692	50	54	2	6.3	0.5			1	99.63

Geberit Mapress Copper adaptor with female thread and plain end



Application purposes


- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63558	12 / 15	15	1/2	4.6	3.3	5	1	5.20
63559	15	18	1/2	4.6	3.3		1	6.31
63560	15 / 20	18	3/4	4.8	3.3		1	6.31
63561	20 / 15	22	1/2	4.6	3.3	5	1	10.15
63562	20	22	3/4	4.9	3.4	5	1	10.15
63564	32 / 25	35	1	6.3	4.6		1	34.33
63565	50	54	2	8.5	6.2		1	48.01

Geberit Mapress Copper elbow adaptor 90° with male thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34728	12 / 15	15	1/2	3.5	3.1	1.5	25	5		18.97
34729	15	18	1/2	3.5	3.4	1.5			1	23.73
34730	20	22	3/4	3.8	3.7	1.7		5	1	30.62

Characteristics

- Pressing indicator
- Leaky if unpriessed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Geberit Mapress Copper elbow adaptor 90° with female thread (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34725	12 / 15	15	1/2	3.6	2.7	1.6	1.7	5	1	18.97
34726	15	18	1/2	3.6	3	1.6	2		1	23.73
34727	20	22	3/4	4.5	3.3	2.4	2.1	5	1	30.62

Characteristics


- Pressing indicator
- Leaky if unpriessed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit Mapress Copper adaptor with union nut (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34556	20	22	1 1/8	3.7	1.6	5	1	15.63
34552	20	22	1 3/8	4	1.9		1	14.91
34557	25	28	1 3/8	4	1.7	5	1	15.69

Characteristics

- Pressing indicator
- Leaky if unpriessed
- Conical-sealing
- Marked in yellow
- Union nut made of brass
- Seal ring made of HNBR, yellow
- O-ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Geberit Mapress Copper flange PN 10/16, with pressing socket (gas)

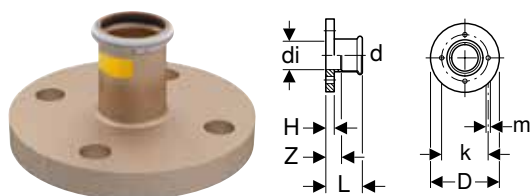

Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug
- Type A (smooth sealing surface), EN 1092-1


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	H [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
34715	25	28	26	11.5	85	14	5.7	1.4	3.4	4	10 / 16	1	596.23

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Sealings

Geberit Mapress Copper cap (gas)



Application purposes

- For natural and liquefied gases
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
34752	12	15	2.3	0.3	5		1	6.39
34753	15	18	2.3	0.3			1	8.01
34754	20	22	2.5	0.4		5	1	10.68
34755	25	28	2.7	0.4			1	15.76
34756	32	35	3	0.4			1	17.57
34757	40	42	3.4	0.4			1	27.29
34758	50	54	3.9	0.4			1	35.56

Connections

Geberit Mapress Copper elbow tap connector 90° (gas)



Application purposes

- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	DR brass CW602N
------------------	-----------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 4.3 cm												
34731	12	15	1/2	3.2	1.3	2.2	1.2	3600	25	5		20.91
34732	15	18	1/2	3.2	1.3	2.2	1.2			5	1	31.83
L1 / length: 5.1 cm												
34733	20	22	3/4	3.5	1.7	2.2	1.4			5	1	34.99

Geberit Mapress Copper elbow tap connector 90°, offset, circular hole 50 mm (gas)



Application purposes

- For connecting one- and two-pipe gas metres
- For natural and liquefied gases
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	DR brass CW602N
------------------	-----------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Marked in yellow
- Two fastening points for circular hole ø 50 mm
- Seal ring made of HNBR, yellow
- Pressing socket with yellow protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	l1 [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
L1 / length: 6.5 cm									
91103	20	22	3/4	4.2	3	1.8	2.1	1	37.50
91105	20 / 25	22	1	4.2	3	2.2	2.1	1	30.36
91104	25 / 20	28	3/4	4.4	3	1.8	2.1	1	40.05
91106	25	28	1	4.4	3	2.2	2.1	1	32.40

Accessories

- Geberit Mapress mounting bracket for gas metre → p. 64

Geberit Mapress mounting bracket for gas metre

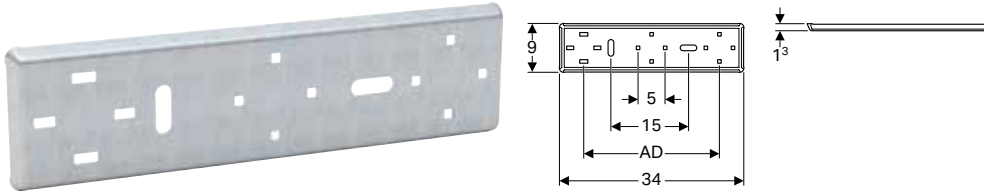

Application purposes

- For one- and two-pipe gas metres

Technical data

Product material	Steel
------------------	-------

Characteristics

- Connecting distance adjustable by ± 3 mm at the gas metre
- Zinc-plated
- Circular hole \varnothing 50 mm


Scope of delivery

- Fastening material

Art. no.	AD [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
91096	25	10	1	25.03

**Geberit Mapress Copper, FKM, blue
 Couplings**

Geberit Mapress Copper coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Art. no.	DN	d, \varnothing [mm]	L [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52062	12	15	4.8	0.8		1	4.94
52063	15	18	4.8	0.8		1	6.42
52064	20	22	5	0.8	5	1	8.22
52065	25	28	5.4	0.8		1	13.13
52066	32	35	6.2	1		1	17.33
52067	40	42	7.1	1.1		1	28.93
52068	50	54	8.3	1.3		1	39.39

Geberit Mapress Copper slip coupling (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52082	12	15	2.5	8	3	1	19.19
52083	15	18	2.5	8	3	1	21.87
52084	20	22	2.5	8.4	3.4	1	23.27
52085	25	28	3	9.1	3.1	1	27.47
52086	32	35	3	10.2	4.2	1	36.50
52087	40	42	4	12	4	1	50.84
52088	50	54	4	14	6	1	59.55

Reducers

Geberit Mapress Copper reducer with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Concentric
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
52133	15 / 12	18	15	5.5	3.5	1	4.15
52134	20 / 12	22	15	5.9	3.9	1	5.00
52135	20 / 15	22	18	5.7	3.7	1	5.00
52136	25 / 12	28	15	6.6	4.6	1	10.45
52137	25 / 15	28	18	6.4	4.4	1	10.45
52138	25 / 20	28	22	6	3.9	1	10.45
52141	32 / 20	35	22	7.1	5	1	13.25
52142	32 / 25	35	28	6.8	4.5	1	13.25
52145	40 / 20	42	22	8.1	6	1	20.91
52146	40 / 25	42	28	7.9	5.6	1	20.91
52147	40 / 32	42	35	7.6	5	1	20.91
52152	50 / 32	54	35	9.6	7	1	27.57
52153	50 / 40	54	42	9.1	6.1	1	27.57

Bends

Geberit Mapress Copper bend (FKM, blue)

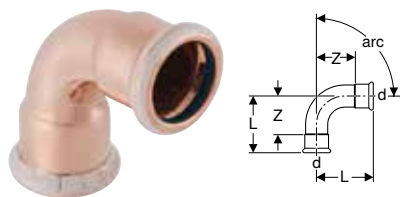

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
52222	12	15	2.8	0.8			1	4.94
52223	15	18	2.9	0.9			1	7.04
52224	20	22	3.2	1.1		5	1	8.81
52225	25	28	3.7	1.4			1	14.89
52226	32	35	4	1.4			1	27.50
52227	40	42	4.7	1.7			1	49.28
52228	50	54	5.7	2.2			1	67.28
arc / angle: 90°								
52282	12	15	3.8	1.8		5	1	4.94
52283	15	18	4.2	2.2		5	1	7.04
52284	20	22	4.7	2.6	50	5		8.81
52285	25	28	5.7	3.4		5	1	14.89
52286	32	35	6.5	3.9			1	27.50
52287	40	42	7.6	4.6			1	46.94
52288	50	54	9.5	6			1	67.28

Geberit Mapress Copper bend with plain end (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
52242	12	15	2.8	3.8	0.8		1	4.94
52243	15	18	2.9	3.9	0.9		1	7.04
52244	20	22	3.2	4.4	1.1	5	1	8.81
52245	25	28	3.7	4.5	1.2		1	14.89
52246	32	35	4	4.9	1.4		1	27.50
52247	40	42	4.7	5.7	1.7		1	49.28
52248	50	54	5.7	6.8	2.2		1	67.28
arc / angle: 90°								
52312	12	15	3.8	5.1	1.8		1	4.94
52313	15	18	4.2	5.3	2.2	5	1	7.04
52314	20	22	4.7	6	2.6	5	1	8.81
52315	25	28	5.7	6.5	3.4		1	14.89
52316	32	35	6.5	7.4	3.9		1	27.50

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52317	40	42	7.6	8.6	4.6		1	46.94
52318	50	54	9.5	10.6	6		1	67.28

Geberit Mapress Copper bend with plain ends



Application purposes

- Application overview – Geberit Mapress Copper → p. 177


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
60905	25	28	4.3	11.9	0	7.6			1	9.59
60906	32	35	4.1	11.8	0	7.7			1	17.93
60907	40	42	4.7	13.7	0	9			1	29.54
60908	50	54	5.5	14.9	0	9.4			1	40.15
arc / angle: 30°										
60935	25	28	4.8	12.4	0	7.6			1	9.59
60936	32	35	4.6	12.3	0	7.7			1	17.93
60937	40	42	5.4	14.4	0	9			1	29.54
60938	50	54	6.3	15.7	0	9.4			1	40.15
arc / angle: 45°										
60875	25	28	4.5	11.8	0	7.3			1	9.59
60876	32	35	4.9	12.6	0	7.7			1	17.93
60877 P	40	42	5.7	14.7	0	9			1	29.54
60878	50	54	6.8	16.2	0	9.4			1	40.15
arc / angle: 60°										
60955	25	28	6.1	13.7	0	7.6			1	9.59
60956	32	35	5.9	13.6	0	7.7			1	17.93
60957	40	42	6.9	15.9	0	9			1	29.54
60958 P	50	54	8.3	17.7	0	9.4			1	40.15
arc / angle: 90°										
60082	12	15	5.1	11.8	0	6.7	50	10		8.25
60083	15	18	5.3	12.2	0	6.9		5	1	8.44
60084	20	22	6	12.8	0	6.8	25	5		8.72
60085	25	28	6.5	14	0	7.5	25	5		9.59
60086	32	35	7.4	15.1	0	7.7			1	17.93
60087	40	42	8.6	17.6	0	9			1	29.54
60088	50	54	10.6	20	0	9.4			1	40.15

P: Phase out

Geberit Mapress Copper pipe bridge

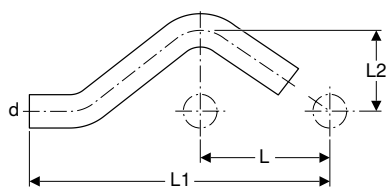

Application purposes

- Application overview – Geberit Mapress Copper → p. 177


Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
60801	10	12	4	15.4	3.4			1	7.32
60802	12	15	6	16.5	3.2	25	5		11.22
60803	15	18	6	16.6	3.3		5	1	10.90
60804	20	22	6	16.8	3.5		5	1	19.69

T-pieces

Geberit Mapress Copper T-piece, equal (FKM, blue)

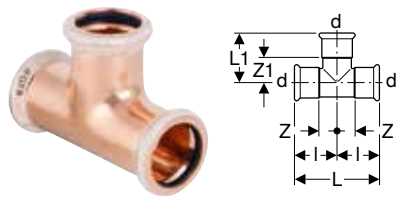

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
52332	12	15	6.4	3.1	3.2	1.2	1.2	1	8.27
52333	15	18	6.8	3.4	3.4	1.4	1.4	1	11.49
52334	20	22	7.4	3.7	3.7	1.6	1.6	1	14.52
52335	25	28	8.4	4.2	4.2	1.9	1.9	1	21.88
52336	32	35	10	5.9	5	2.4	3.3	1	34.99
52337	40	42	11.4	6.6	5.7	2.7	3.6	1	64.99
52338	50	54	13.8	7.8	6.9	3.4	4.3	1	86.88

Geberit Mapress Copper T-piece, reduced (FKM, blue)

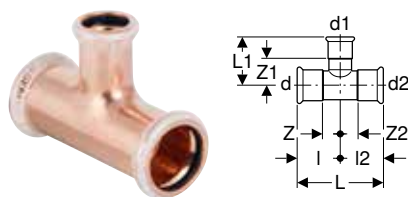

Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	I2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
52356	15 / 12 / 15	18	15	18	6.8	3.5	3.4	3.4	1.4	1.5	1.4	1	11.49
52359	20 / 15 / 20	22	18	22	7.4	3.8	3.7	3.7	1.6	1.8	1.6	1	13.05
52366	25 / 20 / 25	28	22	28	8.4	4.1	4.2	4.2	1.9	2	1.9	1	21.88
52369	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	3.1	2.4	1	34.68
52370	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	1	34.68
52373	40 / 20 / 40	42	22	42	11.4	5.5	5.7	5.7	2.7	3.4	2.7	1	61.00
52374	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	1	61.00
52375	40 / 32 / 40	42	35	42	11.4	6.2	5.7	5.7	2.7	3.6	2.7	1	61.00
52378	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	1	103.88
52379	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	1	103.88
52380	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	1	103.88

Geberit Mapress Copper T-piece with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU1 [pc.]	GBP/pc.
52413	12 / 15 / 12	15	1/2	15	6.8	2.6	3.4	3.4	1.4	1.3	1.4	1	17.25
52414	15	18	1/2	18	8.2	2.4	4.1	4.1	2.1	1.1	2.1	1	17.62
52416	20 / 15 / 20	22	1/2	22	8.4	2.6	4.2	4.2	2.1	1.3	2.1	1	24.82
52418	25 / 15 / 25	28	1/2	28	8.8	2.9	4.4	4.4	2.1	1.6	2.1	1	36.78
52421	32 / 15 / 32	35	1/2	35	10	3.5	5	5	2.4	2.2	2.4	1	43.89
52424	40 / 15 / 40	42	1/2	42	11.4	3.8	5.7	5.7	2.7	2.5	2.7	1	55.17
52427	50 / 15 / 50	54	1/2	54	13.8	4.4	6.9	6.9	3.4	3.1	3.4	1	67.28

Adaptors, permanent

Geberit Mapress Copper adaptor with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
52453	12 / 15	15	1/2	3.6	1.6		1	5.30
52454	12 / 20	15	3/4	3.8	1.8		1	5.30
52455	15	18	1/2	3.7	1.7		1	5.11
52456	15 / 20	18	3/4	3.8	1.8		1	5.11
52457	20 / 15	22	1/2	3.8	1.7		1	8.86
52458	20	22	3/4	3.9	1.8	5	1	8.86
52460	25 / 20	28	3/4	4.2	1.9		1	18.75
52461	25	28	1	4.3	2		1	18.75
52464	32	35	1 1/4	4.9	2.3		1	35.34
52465	40 / 32	42	1 1/4	5.8	2.8		1	46.97
52466	40	42	1 1/2	5.8	2.8		1	46.97
52468	50	54	2	6.3	2.8		1	97.30

Geberit Mapress Copper adaptor with male thread and plain end



Application purposes


- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R [°]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
61932	12 / 15	15	1/2	5.7	5	1	3.48
61933	15	18	1/2	5.7		1	4.23
61935	20 / 15	22	1/2	5.7		1	6.49
61936	20	22	3/4	5.9	5	1	6.49

Geberit Mapress Copper adaptor with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52484	12 / 15	15	1/2	3.8	0.5	1	5.30
52486	15	18	1/2	3.7	0.4	1	5.38
52488	20 / 15	22	1/2	3.6	0.2	1	9.26
52489	20	22	3/4	3.9	0.3	1	9.26
52493	25	28	1	4.5	0.5	1	19.68
52495	32	35	1 1/4	5	0.5	1	37.13
52498	40	42	1 1/2	5.4	0.5	1	49.34
52500	50	54	2	6.3	0.5	1	102.21

Geberit Mapress Copper adaptor with female thread and plain end



Application purposes


- Application overview – Geberit Mapress Copper → p. 177

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
63558	12 / 15	15	1/2	4.6	3.3	5	1	5.20
63559	15	18	1/2	4.6	3.3		1	6.31
63560	15 / 20	18	3/4	4.8	3.3		1	6.31
63561	20 / 15	22	1/2	4.6	3.3	5	1	10.15
63562	20	22	3/4	4.9	3.4	5	1	10.15
63564	32 / 25	35	1	6.3	4.6		1	34.33
63565	50	54	2	8.5	6.2		1	48.01

Geberit Mapress Copper elbow adaptor 90° with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R [°]	L [cm]	H [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52524	12 / 15	15	1/2	3.5	3.1	1.5	1	17.63
52526	15	18	1/2	3.5	3.4	1.5	1	22.02
52529	20	22	3/4	4.8	4.4	2.7	1	28.45
52532	25	28	1	5.8	5.3	3.5	1	38.27

Geberit Mapress Copper elbow adaptor 90° with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU1 [pc.]	GBP/pc.
52544	12 / 15	15	1/2	3.6	2.7	1.6	1.4	1	17.63
52546	15	18	1/2	3.6	3	1.6	1.7	1	22.02
52549	20	22	3/4	4.5	2.7	2.4	1.2	1	28.45
52552	25	28	1	5.1	3.3	2.8	1.6	1	36.68

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106

Adaptors and connections, detachable

Geberit Mapress Copper adaptor union with male thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R [°]	G [°]	L [cm]	H [cm]	SU1 [pc.]	GBP/pc.
52562	12 / 15	15	1/2	3/4	6.1	4.1	1	31.43
52564	15	18	1/2	3/4	6.1	4.1	1	28.14
52566	20 / 15	22	1/2	1	6.7	4.6	1	29.75
52567	20	22	3/4	1	6.8	4.7	1	45.05
52568	20 / 25	22	1	1	6.9	4.8	1	29.75
52570	25	28	1	1 1/4	7.5	5.2	1	47.21
52571	32	35	1 1/4	1 1/2	8	5.4	1	57.22
52572	40	42	1 1/2	1 3/4	8.5	5.5	1	76.92
52573	50	54	2	2 3/8	9.7	6.2	1	126.78

Geberit Mapress Copper adaptor union with female thread (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52611	12 / 15	15	1/2	3/4	5	1.7	1	31.43
52612	12 / 20	15	3/4	3/4	5.9	2.4	1	24.51
52613	15	18	1/2	3/4	5	1.7	1	28.14
52615	20	22	3/4	1	6.2	2.6	1	45.05
52616	20 / 25	22	1	1	6.6	2.8	1	28.33
52617	25	28	1	1 1/4	6.3	2.3	1	47.21
52618	32	35	1 1/4	1 1/2	7.5	3	1	57.22
52619	40	42	1 1/2	1 3/4	7.9	3	1	76.92
52620	50	54	2	2 3/8	8.5	2.7	1	126.78

Geberit Mapress Copper adaptor with union nut (FKM, blue)



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Copper → p. 177

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Pressing indicator
- Union nut made of brass
- Seal ring made of FKM, blue
- Pressing socket with black protection plug
- Flat gasket made of FPM, green

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52653	12	15	3/4	13	3.7	1.1	1	9.88
52656	15	18	3/4	13	3.7	1.1	1	10.72
52661	20	22	1	20	4	1.1	1	16.03
52664	25	28	1	20	4	1.3	1	16.10
52665	25	28	1 1/4	26	4.4	1.3	1	16.10
52667	32	35	1 1/2	32	4.8	1.3	1	19.57

Geberit Mapress adaptor union with clamping ring for corrugated pipes, NPW, plain end



Application purposes

- Suitable exclusively for liquid media

Technical data

Product material	DR brass CW602N
------------------	-----------------

Art. no.	DN	DN1	d, ø [mm]	L [cm]	H [cm]	PN [bar]	SU2 [pc.]	GBP/pc.
22421	12	16	15	6.4	4.9	10	2	19.52
22431	12	20	15	6.7	5.2	10	2	22.77
22422	15	16	18	6.4	4.9	10	2	21.17
22432	15	20	18	6.7	5.2	10	2	24.42
22423	20	16	22	6.8	5.9	10	2	22.77
22433	20	20	22	6.8	5.9	10	2	26.02
22444	25	25	28	6.8	5.9	10	2	35.78

- i** • If the operating pressure of the screw connection and corrugated pipe are different, the lower operating pressure is decisive.

Sealings

Geberit Mapress Copper cap (FKM, blue)



Application purposes

- For solar technology, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Pressing indicator
- Seal ring made of FKM, blue
- Pressing socket with black protection plug

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU1 [pc.]	GBP/pc.
52752	12	15	2.3	0.3	1	7.37
52753	15	18	2.3	0.3	1	9.19
52754	20	22	2.5	0.4	1	12.14
52755	25	28	2.7	0.4	1	17.19
52756	32	35	3	0.4	1	20.55
52757	40	42	3.4	0.4	1	31.44
52758	50	54	3.9	0.4	1	42.40

Accessories for Geberit Mapress Copper

Insulations for connectors

Geberit sound insulation set for single elbow tap connector 90°

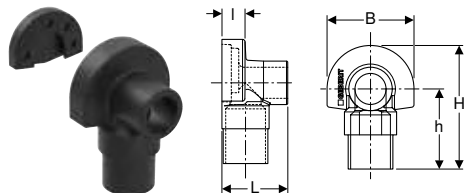

Application purposes

- For Geberit elbow tap connector with female thread Rp 1/2" and Rp 3/4"

Characteristics

- Black

Scope of delivery

- Sound insulation cap
- Sound insulation base

Technical data


Noise reduction at 3 bar flow pressure	12 dB(A)
Product material	EPDM

Art. no.	L [cm]	I [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.801.00.1	5.3	1.9	7	10	6.5	800	100	50	1	4.39

Accessories

- Geberit FlowFit connection bend 90° → p. 294

Geberit sound insulation base for tap connector, straight



Application purposes

- For Geberit tap connector, straight, with female thread Rp 1/2"

Characteristics


- Black

Technical data

Product material	EPDM
------------------	------

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.802.00.1	100	10	1.16

Geberit sound insulation set for double elbow tap connector 90°

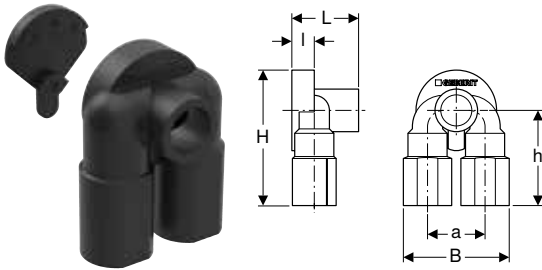

Application purposes

- For Geberit double elbow tap connector with female thread Rp 1/2"

Characteristics

- Black

Scope of delivery

- Sound insulation cap
- Sound insulation base


Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Product material	EPDM

Art. no.	a [cm]	L [cm]	l [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.805.00.1	5	5.3	2	9.2	11.6	8.1	50	10	1	15.71

Caulks for pipes and fittings

Geberit sealing tape



Application purposes

- For protecting the pipe cross-sections of Geberit FlowFit against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Mapress system pipes and fittings against external corrosion factors

Characteristics

- UV-resistant
- Black

Technical data

Installation temperature	-10 – +50 °C
Temperature resistance	-60 – +100 °C
Product material	IIR


Art. no.	s [mm]	L [m]	B [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	12.5	3	6	1	45.96
601.815.00.1	1	12.5	5	5	1	76.56



- Attach after pressure test

Pipe covers

Geberit pipe sleeve, slit



Application purposes

- For cladding visible pipes

Characteristics

- Pure white RAL 9010

Technical data

Product material	PP
------------------	----

Art. no.	di, \emptyset [mm]	L [m]	SU2 [m]	GBP/m
611.605.BM.1	15–20	1	5	3.30

Geberit double collar



Application purposes

- For covering pipe feed-throughs

Characteristics

- Two-piece
- Pure white RAL 9010


Technical data

Product material	PS
------------------	----

Art. no.	a [cm]	di, \emptyset [mm]	L [cm]	B [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.610.BM.1	5	14 / 15 / 16 / 18 / 20	10	5	100	10	1.64

Pipe fastenings

Geberit pipe bracket, insulated, with threaded socket M8 / M10

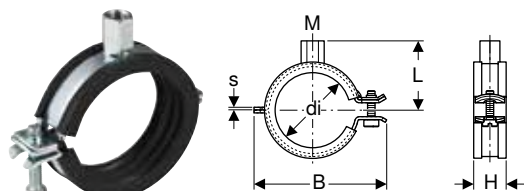

Application purposes

- For fastening Geberit system pipes for supply systems

Characteristics


- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	M [mm]	di, \emptyset [mm]	s [mm]	L [cm]	B [cm]	H [cm]	SU2 [pc.]	GBP/pc.
601.850.26.1	galvanized	8 / 10	12–14	1.5	2.9	4.7	2.3	50	2.13
601.851.26.1	galvanized	8 / 10	15–19	1.5	3.1	5.2	2.3	50	2.13
601.852.26.1	galvanized	8 / 10	20–24	1.5	3.4	5.6	2.3	50	2.13
601.853.26.1	galvanized	8 / 10	25–30	1.5	3.6	6.3	2.3	50	2.29
601.854.26.1	galvanized	8 / 10	32–37	1.5	3.9	6.8	2.3	50	2.46
601.855.26.1	galvanized	8 / 10	40–46	2	4.3	7.6	2.3	50	2.64
601.856.26.1	galvanized	8 / 10	48–53	2	4.5	8.2	2.3	50	2.82
601.857.26.1	galvanized	8 / 10	54–58	2	4.8	8.9	2.3	50	3.17
601.858.26.1	galvanized	8 / 10	63–67	2	5.5	10	2.3	50	4.22
601.859.26.1	galvanized	8 / 10	74–80	2	6.4	11.9	2.3	50	4.41
601.860.26.1	galvanized	8 / 10	83–91	2	6.8	13	2.3	50	4.59
601.861.26.1	galvanized	8 / 10	108–114	2.5	8.1	15.3	2.8	25	5.28

Geberit double nipple M10 / G 1/2"



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Reduced
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.71

Geberit threaded rod



Application purposes


- For building drainage
- For fastening Geberit pipe brackets to base plates
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

Characteristics

- Zinc-plated

Art. no.	Colour / surface	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.834.26.1	galvanized	10	200	25	1	16.27

Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1.15	2	1	35.02

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.37

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	3.92

Connector fastenings

Geberit mounting plate, straight, single

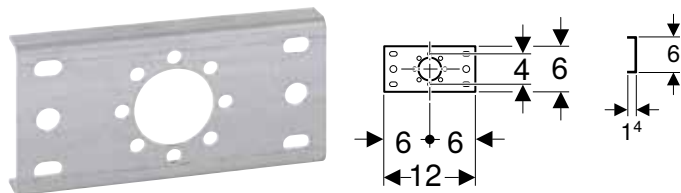

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.736.00.1	40	5	4.17

Geberit mounting plate, straight, double, connecting distance 10 cm or 12 cm



Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.738.00.1	12	10	50	5	9.99

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit mounting plate, straight, double, connecting distance 7.3 cm or 15.3 cm

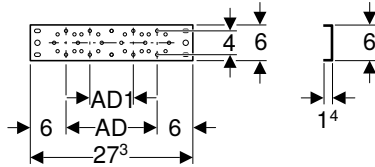

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.737.00.1	15.3	7.3	1500	50	5	5.55

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit mounting plate, offset, single



Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data


Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.733.00.1			400	25	5	6.08

Geberit mounting plate, offset, double, connecting distance 10 cm or 12 cm

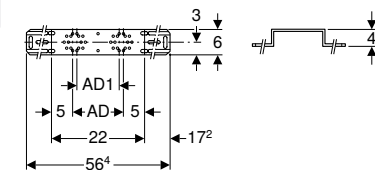

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.731.00.1	12	10	420	5	7.13

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit mounting plate, offset, double, connecting distance 7.3 cm or 15.3 cm

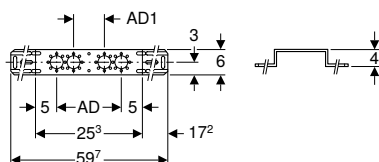

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.732.00.1	15.3	7.3	420	5	6.33


Accessories

- Geberit drain pipe bracket for mounting plates → p. 107



New

Geberit mounting plate, offset, double, connecting distance 15.3 cm

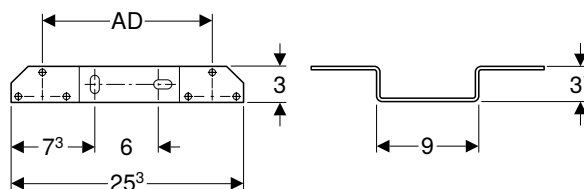

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------


Scope of delivery

- Fastening material

Art. no.	AD [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.742.00.1	15.3	5	1	7.68

Available as of April 2023

Geberit drain pipe bracket for mounting plates

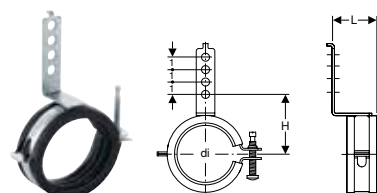

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Characteristics

- Sound-absorbing
- Zinc-plated

Art. no.	di, Ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.741.00.1	50-56	3.6	5.2-5.5	25	5	1	4.08

Geberit mounting aid set for straight connector, for drywall construction



Technical data

Product material	Steel / plastic
------------------	-----------------

Scope of delivery

- Stud bolt G 1/2"
- Protection box

Characteristics

- Reusable

Art. no.	G ["]	SU2 [pc.]	GBP/pc.
601.744.00.1	1/2	2	14.05

System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90401	10	12		10		0.45
90402	12	15	50	10		0.45
90403	15	18	50	10		0.57
90404	20	22	50	10		0.57
90405	25	28	50	10		0.62
90406	32	35	50	10		0.62
90407	40	42		10		0.91
90408	50	54		10		0.91
90412	65	66.7		5		1.98
90409	65	76.1			1	2.52
90410	80	88.9			1	3.44
90411	100	108			1	6.67

Geberit Mapress seal ring, EPDM, black



Application purposes

- For technical building systems, industry and shipbuilding
- For Geberit Mapress Copper pressing sockets
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	EPDM

Art. no.	DN	d, ø [mm]	SU1 [pc.]	GBP/pc.
90465	65	66.7	1	1.49
90466	65	76.1	1	2.07
90467	80	88.9	1	2.65
90468	100	108	1	5.07

Geberit Mapress seal ring, FKM, blue



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics


- Silicone-free (LABS-free)

Technical data

Operating temperature	-25 – +180 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90881	10	12		10	2.64
90882	12	15	100	10	1.12
90883	15	18	100	10	1.35
90884	20	22	100	10	1.61
90885	25	28	100	10	1.90
90886	32	35	100	10	2.21
90887	40	42	100	10	4.06
90888	50	54	100	10	5.68
90891	65	76.1	50	5	16.76
90892	80	88.9	50	5	20.84
90893	100	108	25	5	46.48

Geberit Mapress flat gasket, EPDM, black



Application purposes


- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.32
90081	3/4	24	13	2	50	10	0.32
90082	1	30	19.6	2		10	0.32
90083	1 1/4	39	25.6	2		10	0.51
90084	1 1/2	45	32	2		10	0.70
90085	1 3/4	50	39	2		10	0.83
90086	2 3/8	66	51	3		10	1.71

Geberit Mapress flat gasket, FPM, green

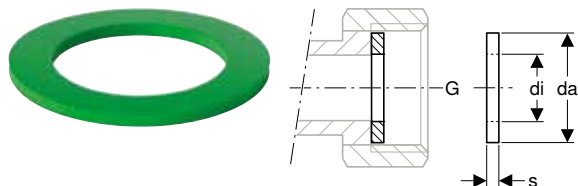

Application purposes


- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	FPM

Art. no.	G [“]	da [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.82
90094	1	30	19.6	2	10	3.22
90095	1 1/4	39	25.6	2	10	1.39
90096	1 1/2	45	32	2	10	1.71
90097	1 3/4	50	39	2	10	2.42
90098	2 3/8	66	51	2	10	4.42

Geberit Mapress flat gasket Centellen® R WS 3825

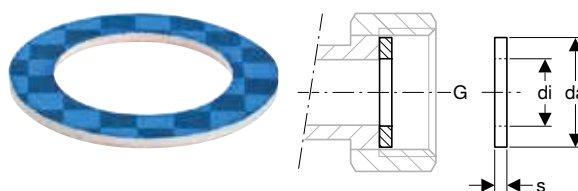

Application purposes


- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +150 °C
Product material	Centellen® R WS 3825

Art. no.	G [“]	da [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.021.00.1	1/2	18	10	2	5	1.35
600.022.00.1	3/4	24	13	2	5	1.39
600.023.00.1	1	30	20	2	5	1.42
600.024.00.1	1 1/8	35	21	2	5	1.69
600.025.00.1	1 1/4	39	26	2	5	1.77
600.026.00.1	1 1/2	45	32	2	5	1.82
600.027.00.1	1 3/4	51	39	2	5	1.93
600.028.00.1	2	56	42	2	5	2.05
600.029.00.1	2 1/4	63	42	2	5	2.11
600.030.00.1	2 3/8	66	51	2	5	2.27
600.031.00.1	2 1/2	72	54	2	5	2.57
600.032.00.1	2 3/4	78	57	2	5	3.11
600.033.00.1	3	85	72	2	5	3.39
600.034.00.1	3 1/2	97	85	2	5	3.82

Geberit Mapress flat gasket Centellen® HD WS 3822

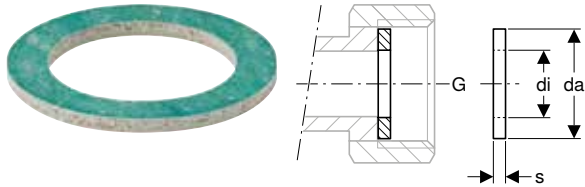

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Technical data

Operating temperature	-20 – +155 °C
Product material	Centellen® HD WS 3822

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU1 [pc.]	GBP/pc.
90072	3/4	24	13	2	1	2.29
90074	1	30	19.6	2	1	2.29
90075	1 1/4	39	25.6	2	1	3.44
90076	1 1/2	45	32	2	1	3.44
90077	1 3/4	50	39	2	1	4.59
90078	2 3/8	66	51	3	1	5.72

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	44	20	2	6	1	2.23
91042	20	54	25	2	6	1	2.74
91043	25	64	30	2	6	1	3.24
91044	32	76	38	2	6	1	4.00
91045	40	86	45	2	6	1	5.02
91046	50	96	57	2	6	1	5.75
91047	65	116	76	2	6	1	6.49
91048	80	132	89	2	6	1	8.76
91049	100	152	108	2	6	1	9.99

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91031	15	50	20	2	10 / 16		1	1.77
91032	20	60	25	2	10 / 16	5	1	2.15
91033	25	70	30	2	10 / 16	5	1	2.56
91034	32	82	38	2	10 / 16	5	1	3.15
91035	40	92	45	2	10 / 16	5	1	3.93
91036	50	107	57	2	10 / 16	5	1	4.50
91037	65	127	76	2	10 / 16	5	1	5.10
91038	80	142	89	2	10 / 16	5	1	6.29
91039	100	162	108	2	10 / 16	5	1	7.88

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data


Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.47
91165	10	11	5	3.6	4	2.47
91166	12	14	5	3	4	3.08
91167	12	14	5.5	3.5	4	3.08
91168	12	14	6	4	4	2.35
91169	16	18	5.5	3.3	4	2.79
91170	16	18	6	3.8	4	2.79
91171	16	18	6.5	4.3	4	2.79
91172	16	18	7	4.8	4	2.79
91173	16	18	8	5.8	4	2.79

Geberit bolt set for flange connection, made of zinc-plated steel



Application purposes

- For flanges made of carbon steel, gunmetal and brass

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated
- Strength class 8.8, EN 20898-2

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	2.49
91065	10	11	5	3.6	4	2.49
91066	12	14	5	3	4	2.49
91067	12	14	5.5	3.5	4	2.49
91068	12	14	6	4	4	2.49
91069	16	18	5.5	3.3	4	2.49
91070	16	18	6	3.8	4	2.49
91071	16	18	6.5	4.3	4	2.49
91072	16	18	7	4.8	4	2.49
91073	16	18	8	5.8	4	2.49





Geberit Mapress CuNiFe

Preliminary remarks.....	239
Dimensional changes for Geberit Mapress CuNiFe – April 2023 to April 2024	240
Application overview – Geberit Mapress CuNiFe.....	241
Geberit Mapress CuNiFe.....	242
System pipes 2.1972	242
Couplings	242
Reducers.....	243
Bends.....	244
T-pieces.....	246
Adaptors, permanent.....	248
Adaptors and connections, detachable.....	250
Feed-throughs	252
Accessories for Geberit Mapress CuNiFe	253
System seals.....	253
Sets of bolts for flange connections.....	256



Preliminary remarks

Introduction to Geberit Mapress CuNiFe

Geberit Mapress CuNiFe is a sea water resistant material. It is especially suited to shipbuilding and has proved itself over many years with pipelines carrying salt water in lots of installations.

The copper-nickel-iron alloy is used in shipbuilding for engine room systems, the supply of service water, pool water and heating water.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

Benefits of Geberit Mapress CuNiFe

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Clean installation using the Geberit pressing technology. No consumables required.

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Resistant to salt water

High resistance to corrosion due to the copper-nickel-iron alloy (CuNi10Fe1,6Mn)

Experienced

More than 30 years of practical experience in pressing technology

Always consider

The 6 stage pressing process

- Cut and deburr the pipe
- Mark the insertion depth on the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar
- Remove the pressing indicator

Check you are using the correct material for the required application. See page 8 for an in depth overview of the applications for Geberit Mapress CuNiFe.

Only Geberit Mapress system pipes are suitable to press Geberit Mapress CuNiFe fittings. To adapt on to existing or dissimilar materials you must use a threaded connection.

Use the correct tooling

Always check that you are using the correct tools, this can be checked in the Geberit Tooling Product Guide and Price List.

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mapress CuNiFe

Geberit Great Britain, Version: December 2022

Application purposes	Operating temperature	Maximum operating pressure	Pipes	Fittings	Seal rings		
			CuNiFe	CuNiFe	CIIR, black	FKM, blue	
Liquid media							
For cooling and heating water without antifreeze agent	0–100 °C	12 bar/1300 kPa	✓	✓	✓		
For cooling and heating water with antifreeze agent	-30 – +120 °C	12 bar/1300 kPa	✓	✓	✓ ⁴⁾		
For service water and process water	0–100 °C	12 bar/1300 kPa	3)	3)	3)		
For grey and black water with pH value > 6.0	0–100 °C	12 bar/1300 kPa	✓	✓	✓		
For seawater	0–100 °C	12 bar/1300 kPa	✓	✓	✓		
For extinguishing water (wet)	0–70 °C	12 bar/1300 kPa	✓	✓	✓		
For sprinklers (wet)	0–70 °C	12 bar/1300 kPa	✓	✓	✓		
For mineral and lubricating oil	Upon request	Upon request	3)	3)			3)
For motor fuels (e.g. diesel)	Upon request	Upon request	3)	3)			3)
Gaseous media							
For compressed air (purity class oil 0–3) ¹⁾	0–100 °C	10 bar /1000 kPa	✓	✓	✓		
For compressed air (oil purity class 0–X) ¹⁾	0–100 °C	10 bar /1000 kPa	✓	✓			✓
For negative pressure ²⁾	0–40 °C	Abs. ≥ 0,2 bar/20 kPa	✓	✓	✓		
For inert gases (e.g. nitrogen)	Upon request	Upon request	3)	3)	3)		

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Purity class oil according to ISO 8573-1:2010E; for details on humidity and particles see Technical Information "Geberit piping systems for compressed air installations"

²⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

³⁾ Following Geberit approval

⁴⁾ Only use approved antifreeze agents



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

Dimensional changes for Geberit Mapress CuNiFe – April 2023 to April 2024

Geberit Great Britain, Version: December 2022

		[°]	DN	d, ø	L	L1	H
Geberit Mapress CuNiFe bend adaptor	67506	90 °	20 / 15	22 mm		8.4 cm	
90° with female thread	67507	90 °	20	22 mm		8.6 cm	
Geberit Mapress CuNiFe bend adaptor	67516	90 °	20 / 15	22 mm			8.2 cm
90° with male thread	67517	90 °	20	22 mm			8.6 cm



- Between April 2022 and April 2023, the dimensions of the articles listed above will be modified in accordance with the table. These articles with the new dimensions
- will then feature an additional X on the label


	Flat gaskets for screw connections			Flange gaskets
	EPDM, black	FPM, green	Centellen® R WS 3825	Centellen® HD WS 3822
	✓			✓
			✓	✓
	3)			3)
	✓			✓
	✓			✓
	✓			✓
	✓			✓
		3)		3)
		3)		3)
				✓
		✓		✓
	✓			✓
	3)			3)



Geberit Mapress CuNiFe

System pipes 2.1972

Geberit Mapress CuNiFe system pipe

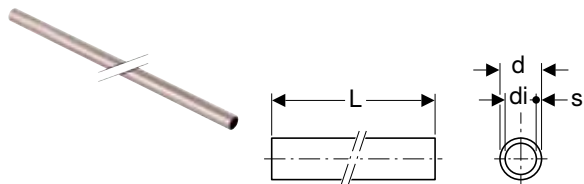

Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
Thermal expansion	0.017 mm/(m·K)
Thermal conductivity, pipe	50 W/(m·K)
Specific thermal capacity	377 J/(kg·K)

Characteristics

- Seamlessly drawn
- Pipe end with black protective cap

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU2 [m]	GBP/m
56319	12	15	13	1	6	6	21.04
56321	20	22	20	1	6	6	38.40
56326	20	22	19	1.5	6	6	47.12
56322	25	28	25	1.5	6	6	53.94
56323	32	35	32	1.5	6	6	70.92
56324	40	42	39	1.5	6	6	87.01
56325	50	54	51	1.5	6	6	110.19
56327	65	76.1	72.1	2	6	6	190.02
56328	80	88.9	84.9	2	6	6	255.51
56329	100	108	104	2.5	6	6	382.79

Accessories

- Geberit Mapress pipe cutter R → p. 427
- Geberit Mapress pipe deburrer → p. 428
- Geberit Mapress insertion distance template with marker pen → p. 429

Couplings

Geberit Mapress CuNiFe coupling



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data


Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67002	12	15	4.8	0.8		50	10		11.74
67004	20	22	5	0.8		50	10		14.71
67005	25	28	5.4	0.8		50	10		16.66
67006	32	35	6.2	1		50	10		20.65
67007	40	42	7.1	1.1		24	4		28.10
67008	50	54	8.3	1.3	1200	24	4		33.60
67009	65	76.1	12.7	2.1		5		1	162.58
67010	80	88.9	14.5	2.5		5		1	189.63
67011	100	108	17.6	2.6		5		1	243.83

Geberit Mapress CuNiFe slip coupling



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	E [cm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67102	12	15	2.5	8	3			10		19.51
67104	20	22	2.5	8.4	3.4			10		23.06
67105	25	28	3	9.1	3.1			10		26.87
67106	32	35	3	10.2	4.2			10		29.80
67107	40	42	4	12	4			4		34.69
67108	50	54	4	14	6			4		44.99
67109	65	76.1	6	23	11	200	5		1	246.54
67110	80	88.9	7	26	12				1	279.10
67111	100	108	8	31	15				1	335.98

Reducers

Geberit Mapress CuNiFe reducer with plain end



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67305	20 / 12	22	15	5.9	3.9			10		14.11
67307	25 / 12	28	15	6.6	4.6			10		16.06
67309	25 / 20	28	22	6	3.9			10		16.06
67312	32 / 20	35	22	7.1	5			10		24.95
67313	32 / 25	35	28	6.8	4.5			10		24.95
67317	40 / 25	42	28	8.3	6			4		32.16
67318	40 / 32	42	35	7.6	5			4		32.16
67323	50 / 32	54	35	10.6	8		12	4		45.43
67324	50 / 40	54	42	8.9	5.9	1920	24	4		45.43
67337	65 / 40	76.1	42	12.7	9.7				1	146.04
67325	65 / 50	76.1	54	14.6	11.1	480	5		1	146.04
67338	80 / 50	88.9	54	16.2	12.8				1	157.40
67327	80 / 65	88.9	76.1	16	10.7				1	157.40
67346	100 / 65	108	76.1	18.4	13.1				1	165.74
67330	100 / 80	108	88.9	20.4	14.4				1	165.74




- Some articles will be given new dimensions between April 2022 and April 2023. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress CuNiFe – April 2022 to April 2023' overview



Bends

Geberit Mapress CuNiFe bend



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°									
68716	12	15	3	1			10		16.01
68718	20	22	3.3	1.2			10		21.88
68719	25	28	3.6	1.3			10		27.69
68720	32	35	3.2	0.6			10		36.83
68721	40	42	3.7	0.7			4		58.43
68722	50	54	4.4	0.9			4		77.47
68723	65	76.1	7.5	2.2				1	285.73
68724	80	88.9	8.5	2.5				1	342.87
68725	100	108	10.3	2.8				1	469.89
arc / angle: 30°									
68736	12	15	3.3	1.3			10		16.01
68738	20	22	3.7	1.6			10		21.88
68739	25	28	4.1	1.8			10		27.69
68740	32	35	3.7	1.1			10		36.83
68741	40	42	4.4	1.4			4		58.43
68742	50	54	5.2	1.7			4		77.47
68743	65	76.1	8.8	3.5		5		1	285.73
68744	80	88.9	10.1	4.1				1	342.87
68745	100	108	12.2	4.7				1	469.89
arc / angle: 45°									
67602	12	15	3.6	1.6		50	10		16.01
67604	20	22	3.2	1.1		50	10		21.88
67605	25	28	3.7	1.4		50	10		27.69
67606	32	35	4.3	1.7		50	10		36.83
67607	40	42	5.1	2.1	1200	24	4		58.43
67608	50	54	6.2	2.7	768	24	4		77.47
67609	65	76.1	10.3	5		5		1	228.64
67610	80	88.9	11.7	5.7		5		1	274.32
67611	100	108	14.3	6.8	80	5		1	407.23
arc / angle: 60°									
68804	12	15	4	2			10		16.01
68806	20	22	4.7	2.6			10		21.88
68807	25	28	5.4	3.1			10		27.69
68808	32	35	5	2.4			10		36.83
68809	40	42	5.9	2.9			4		58.43
68810	50	54	7.2	3.7			4		77.47
68811	65	76.1	11.7	6.4				1	285.73
68812	80	88.9	13.6	7.6				1	342.87
68813	100	108	16.6	9.1				1	469.89
arc / angle: 90°									
68102	12	15	2.8	0.8		50	10		16.01
68104	20	22	3.2	1.1		50	10		21.88
68105	25	28	5.7	3.4		50	10		27.69
68106	32	35	4.3	1.7		50	10		36.83
68107	40	42	5.1	2.1	1200	24	4		58.43
68108	50	54	6.2	2.7	384	24	4		77.47
68109	65	76.1	15.9	10.6		5		1	228.64
68110	80	88.9	18.5	12.5	80	5		1	274.32
68111	100	108	23	15.5	60	5		1	407.23

Geberit Mapress CuNiFe bend with plain end



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 15°										
68726	12	15	3	4	1			10		16.01
68728	20	22	3.3	4.1	1.2			10		21.88
68729	25	28	3.6	4.3	1.3			10		27.69
68730	32	35	3.2	4.1	0.6			10		36.83
68731	40	42	3.7	4.7	0.7			4		58.43
68732	50	54	4.4	5.5	0.9			4		77.47
68733	65	76.1	7.5	8.4	2.2				1	285.73
68734	80	88.9	8.5	9.5	2.5				1	342.87
68735	100	108	10.3	11.7	2.8				1	469.89
arc / angle: 30°										
68746	12	15	3.3	4.3	1.3			10		16.01
68748	20	22	3.7	4.6	1.6			10		21.88
68749	25	28	4.1	4.8	1.8			5		27.69
68750	32	35	3.7	4.6	1.1			10		36.83
68751	40	42	4.4	5.4	1.4			4		58.43
68752	50	54	5.2	6.3	1.7			4		77.47
68753	65	76.1	8.8	9.7	3.5				1	285.73
68754	80	88.9	10.1	11.1	4.1				1	342.87
68755	100	108	12.2	13.6	4.7				1	469.89
arc / angle: 45°										
67702	12	15	3.6	4.5	1.6			10		16.01
67704	20	22	3.2	4.4	1.1			10		21.88
67705	25	28	3.7	4.6	1.4			10		27.69
67706	32	35	4.3	5.2	1.7			10		36.83
67707	40	42	5.1	6.1	2.1		24	4		58.43
67708	50	54	6.2	7.3	2.7	960	24	4		77.47
67709	65	76.1	10.3	11.1	5		5		1	228.64
67710	80	88.9	11.7	12.8	5.7		5		1	274.32
67711	100	108	14.3	15.8	6.8				1	407.23
arc / angle: 60°										
68814	12	15	4	5	2			10		16.01
68816	20	22	4.7	5.6	2.6			10		21.88
68817	25	28	5.4	6.1	3.1			10		27.69
68818	32	35	5	5.9	2.4			10		36.83
68819	40	42	5.9	6.9	2.9			4		58.43
68820	50	54	7.2	8.3	3.7			4		77.47
68821	65	76.1	11.7	12.6	6.4				1	285.73
68822	80	88.9	13.6	14.6	7.6				1	342.87
68823	100	108	16.6	18	9.1				1	469.89
arc / angle: 90°										
68302	12	15	2.8	3.6	0.8			10		16.01
68304	20	22	3.2	3.9	1.1		50	10		21.88
68305	25	28	5.7	6.6	3.4		50	10		27.69
68306	32	35	4.3	5	1.7			10		36.83
68307	40	42	8	8.8	5		24	4		58.43
68308	50	54	6.2	7	2.7	768	24	4		77.47
68309	65	76.1	15.9	16.7	10.6		5		1	228.64
68310	80	88.9	18.5	19.5	12.5				1	274.32
68311	100	108	23	24.1	15.5				1	407.23



Geberit Mapress CuNiFe bend with plain ends 90°



Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	H [cm]	H1 [cm]	K [cm]	K1 [cm]	SU2 [pc.]	GBP/pc.
67402	12	15	5.9	12.9	0	7	10	17.56
67404	20	22	7	14.2	0	7.2	5	18.71
67405	25	28	7.9	15.5	0	7.6	10	19.83
67406	32	35	7.7	15.4	0	7.7	10	40.91
67407	40	42	9	18	0	9	4	55.14
67408	50	54	11.1	20.5	0	9.4	4	69.36

T-pieces

Geberit Mapress CuNiFe T-piece, equal

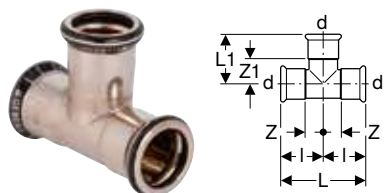

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
68002	12	15	6.4	4	3.2	1.2	2	10		26.85
68004	20	22	7.4	4.5	3.7	1.6	2.4	10		30.45
68005	25	28	8.4	5.1	4.2	1.9	2.8	10		36.93
68006	32	35	10	5.9	5	2.4	3.3	10		46.00
68007	40	42	11.4	6.6	5.7	2.7	3.6	4		66.50
68008	50	54	13.8	7.2	6.9	3.4	3.7	4		77.06
68009	65	76.1	23	11	11.5	6.2	5.7		1	403.07
68010	80	88.9	26	12.7	13	7	6.7		1	439.70
68011	100	108	31	15.3	15.5	8	7.8		1	512.64

Geberit Mapress CuNiFe T-piece, reduced

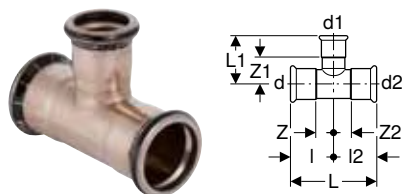

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67206	20 / 12 / 20	22	15	22	7.4	4.4	3.7	3.7	1.6	2.4	1.6	10		30.45
67209	25 / 12 / 25	28	15	28	8.4	4.7	4.2	4.2	1.9	2.7	1.9	10		36.93
67211	25 / 20 / 25	28	22	28	8.4	4.8	4.2	4.2	1.9	2.7	1.9	10		36.93
67212	32 / 12 / 32	35	15	35	10	4.9	5	5	2.4	2.9	2.4	10		48.51
67214	32 / 20 / 32	35	22	35	10	5.2	5	5	2.4	2.1	2.4	10		46.00
67215	32 / 25 / 32	35	28	35	10	5.5	5	5	2.4	3.2	2.4	10		46.00
67218	40 / 20 / 40	42	22	42	11.4	5.4	5.7	5.7	2.7	3.3	2.7	4		66.50
67219	40 / 25 / 40	42	28	42	11.4	5.8	5.7	5.7	2.7	3.5	2.7	4		66.50
67220	40 / 32 / 40	42	35	42	11.4	6.2	5.7	5.7	2.7	3.6	2.7	4		66.50
67227	50 / 20 / 50	54	22	54	13.8	6.1	6.9	6.9	3.4	4	3.4	4		77.06
67228	50 / 25 / 50	54	28	54	13.8	6.4	6.9	6.9	3.4	4.1	3.4	4		77.06
67225	50 / 32 / 50	54	35	54	13.8	6.8	6.9	6.9	3.4	4.2	3.4	4		77.06
67226	50 / 40 / 50	54	42	54	13.8	7.2	6.9	6.9	3.4	4.2	3.4	4		77.06
67229	65 / 20 / 65	76.1	22	76.1	23	7.2	11.5	11.5	6.2	5.1	6.2		1	399.02
67230	65 / 25 / 65	76.1	28	76.1	23	7.5	11.5	11.5	6.2	5.2	6.2		1	399.02
67231	65 / 32 / 65	76.1	35	76.1	23	7.9	11.5	11.5	6.2	5.3	6.2		1	399.02
67252	65 / 40 / 65	76.1	42	76.1	23	8.3	11.5	11.5	6.2	5.3	6.2		1	399.02
67253	65 / 50 / 65	76.1	54	76.1	23	8.9	11.5	11.5	6.2	5.4	6.2		1	399.02
67233	80 / 20 / 80	88.9	22	88.9	26	7.8	13	13	7	5.7	7		1	415.63
67250	80 / 25 / 80	88.9	28	88.9	26	8.1	13	13	7	5.8	7		1	415.63
67251	80 / 32 / 80	88.9	35	88.9	26	8.5	13	13	7	5.9	7		1	415.63
67239	80 / 40 / 80	88.9	42	88.9	26	8.9	13	13	7	5.9	7		1	415.63
67260	80 / 50 / 80	88.9	54	88.9	26	9.5	13	13	7	6	7		1	415.63
67261	80 / 65 / 80	88.9	76.1	88.9	26	11.6	13	13	7	6.3	7		1	415.63
67244	100 / 20 / 100	108	22	108	31	8.8	15.5	15.5	8	6.7	8		1	512.64
67245	100 / 25 / 100	108	28	108	31	9.1	15.5	15.5	8	6.8	8		1	512.64
67246	100 / 32 / 100	108	35	108	31	9.5	15.5	15.5	8	6.9	8		1	512.64
67247	100 / 40 / 100	108	42	108	31	9.9	15.5	15.5	8	6.9	8		1	512.64
67248	100 / 50 / 100	108	54	108	31	10.5	15.5	15.5	8	7	8		1	512.64
67269	100 / 65 / 100	108	76.1	108	31	12.6	15.5	15.5	8	7.3	8		1	512.64
67270	100 / 80 / 100	108	88.9	108	31	13.7	15.5	15.5	8	7.7	8		1	512.64

Geberit Mapress CuNiFe T-piece with female thread



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	l [cm]	l2 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
67344	12 / 15 / 12	15	1/2	15	6.4	3.7	3.2	3.2	0.8	2.4	0.8	10		27.92
67347	20 / 15 / 20	22	1/2	22	7.4	4.1	3.7	3.7	1.6	2.8	1.6	10		38.42
67348	20	22	3/4	22	7.4	4.6	3.7	3.7	1.6	3.1	1.6	10		38.42
67349	25 / 15 / 25	28	1/2	28	8.4	4.4	4.2	4.2	1.9	3.1	1.9	10		42.91
67350	25 / 20 / 25	28	3/4	28	8.4	4.6	4.2	4.2	1.9	3.1	1.9	10		42.91
67352	32 / 15 / 32	35	1/2	35	10	4.8	5	5	2.4	3.5	2.4		1	52.04
67353	32 / 20 / 32	35	3/4	35	10	5.3	5	5	2.4	4	2.4		1	52.04
67356	40 / 15 / 40	42	1/2	42	11.4	5.1	5.7	5.7	2.7	3.8	2.7		1	63.49
67357	40 / 20 / 40	42	3/4	42	11.4	5.6	5.7	5.7	2.7	4.3	2.7		1	63.49
67360	50 / 15 / 50	54	1/2	54	13.8	5.7	6.9	6.9	3.4	4.4	3.4		1	75.94
67361	50 / 20 / 50	54	3/4	54	13.8	6.2	6.9	6.9	3.4	4.9	3.4		1	75.94
67366	65 / 20 / 65	76.1	3/4	76.1	23	7	11.5	11.5	6.2	5.5	6.2		1	355.34
67369	80 / 20 / 80	88.9	3/4	88.9	26	7.6	13	13	7	6.1	7		1	386.09
67373	100 / 20 / 100	108	3/4	108	31	8.6	15.5	15.5	8	7.1	8		1	464.81

Adaptors, permanent

Geberit Mapress CuNiFe adaptor with male thread



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
68703	12 / 15	15	1/2	5.3	3.3	50	10	30.57
68715	20 / 15	22	1/2	5.4	3.3		10	34.63
68707	20	22	3/4	5.8	3.7		10	34.63
68708	25	28	1	6.4	4.1		10	52.93
68709	32	35	1 1/4	7.2	4.6		10	61.08
68710	40	42	1 1/2	7.7	4.7		4	89.54
68711	50	54	2	8.9	5.4		4	126.20



- Adaptors with NPT thread on demand

Geberit Mapress CuNiFe adaptor with male thread NPT



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- NPT pipe thread according to ASME/ANSI B1.20.1
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
68833	12 / 15	15	6.1	4.1	10	36.65
68837	20	22	6.3	4.2	10	48.88
68838	25	28	7.2	4.9	10	69.21
68839	32	35	7.8	5.2	10	109.90
68840	40	42	8.3	5.3	4	150.65
68841	50	54	9	5.5	4	223.90

Geberit Mapress CuNiFe adaptor with female thread



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
67802	12 / 15	15	1/2	5.5	2.2	10	30.57
67805	20 / 15	22	1/2	5.6	2.2	10	34.63

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
67806	20	22	3/4	5.8	2.2	10	34.63
67809	25	28	1	6.4	2.4	10	52.93
67811	32	35	1 1/4	7	2.5	10	61.08
67814	40	42	1 1/2	7.4	2.5	4	89.54
67818	50	54	2	8.9	3.1	4	126.20

Geberit Mapress CuNiFe bend adaptor 90° with male thread



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug


Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU2 [pc.]	GBP/pc.
67515	12 / 15	15	1/2	3.8	7.5	1.8	10	36.83
67516	20 / 15	22	1/2	4.7	8.4	2.6	10	47.43
67517	20	22	3/4	4.7	8.8	2.6	10	47.43
67518	25	28	1	5.7	9.7	3.4	10	56.11
67519	32	35	1 1/4	6.8	11.2	4.2	10	79.76
67520	40	42	1 1/2	8	12.4	5	4	129.52
67521	50	54	2	10	14.4	6.5	4	165.10



- Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress CuNiFe – April 2023 to April 2024' overview



Geberit Mapress CuNiFe bend adaptor 90° with female thread



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	GBP/pc.
67503	12 / 15	15	1/2	3.8	7.7	1.8	6.4	10	36.83
67506	20 / 15	22	1/2	4.7	8.6	2.6	7.3	10	47.43
67507	20	22	3/4	4.7	8.8	2.6	7.3	10	47.43
67508	25	28	1	5.7	9.7	4	7.8	10	56.11
67509	32	35	1 1/4	6.8	11	4.2	9.1	10	79.76
67510	40	42	1 1/2	8	12.1	5	10.4	4	129.52
67511	50	54	2	10	15	6.5	13	4	165.10

Accessories

- Fastening for Geberit Mapress elbow adaptor 90° → p. 106



- Some articles will be given new dimensions between April 2023 and April 2024. The articles with the new dimensions are listed in the 'Dimensional changes for Geberit Mapress CuNiFe – April 2023 to April 2024' overview

Adaptors and connections, detachable

Geberit Mapress CuNiFe adaptor union with male thread



Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data


Media temperature with flat gasket EPDM	0–100 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Characteristics

- Pressing indicator
- Leaky if unpressed
- Union nut made of brass
- Seal ring made of CIIR, black
- Flat gasket made of EPDM
- Pressing socket with transparent protection plug

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU2 [pc.]	GBP/pc.
67232	12 / 15	15	1/2	3/4	8.1	6.1	10	50.96
67234	20 / 15	22	1/2	1	8.4	6.3	10	59.46
67243	20	22	3/4	1	8.5	6.4	10	59.46
67235	25	28	1	1 1/4	9.6	7.3	10	93.40
67236	32	35	1 1/4	1 1/2	10.4	7.8	10	118.90
67237	40	42	1 1/2	1 3/4	10.9	7.9	4	137.83
67238	50	54	2	2 3/8	12.4	8.9	4	237.44

Geberit Mapress CuNiFe flange PN 6, with pressing socket

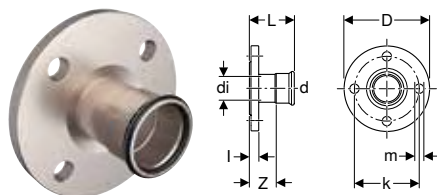

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-3

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	I [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
68682	15 / 12	15	14.1	8	55	11	5.9	1	3.9	4	6		1	114.43
68684	20	22	19	9	65	11	6.3	1	4.2	4	6		1	140.78
68685	25	28	25.2	10	75	11	6.7	1	4.4	4	6		1	156.32
68686	32	35	32	12	90	14	6.8	1	4.2	4	6		1	191.27
68687	40	42	39	13	100	14	7.7	1.2	4.7	4	6		1	238.94
68688	50	54	51	14	110	14	8.5	1.4	5	4	6		1	272.38
68689	65	76.1	71.9	16	130	14	11.8	1.6	6.5	4	6	75	1	327.29
68690	80	88.9	84.7	19	150	18	12.3	1.6	6.3	4	6	75	1	419.14
68691	100	108	103.8	21	170	18	12.8	1.8	5.3	4	6		1	502.73

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 6 → p. 111

Geberit Mapress CuNiFe flange PN 10/16, with pressing socket

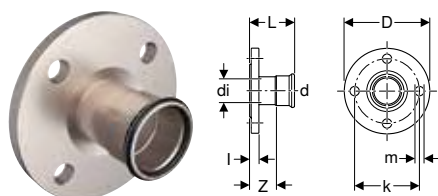

Application purposes

- For industry and shipbuilding
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug
- Design B1 (raised sealing strip with standard sealing strip), EN 1092-3

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
68692	15 / 12	15	14.1	9.5	65	14	6.1	1.2	4.1	4	10 / 16		1	139.85
68694	20	22	19	10.5	75	14	6.5	1.2	4.4	4	10 / 16		1	171.61
68695	25	28	25.2	11.5	85	14	6.9	1.2	4.6	4	10 / 16		1	191.52
68696	32	35	32	14	100	18	7.2	1.4	4.6	4	10 / 16		1	255.78
68697	40	42	39	15	110	18	7.9	1.4	4.9	4	10 / 16		1	296.39
68698	50	54	51	16.5	125	18	8.7	1.6	5.2	4	10 / 16		1	364.20
68699	65	76.1	71.9	18.5	145	18	11.8	1.6	6.5	4	10 / 16	75	1	413.85
68700	80	88.9	84.7	20	160	18	12.5	1.8	6.5	8	10 / 16	75	1	539.01
68701	100	108	103.8	22	180	18	13	2	5.5	8	10 / 16		1	629.68

Accessories

- Geberit bolt set for flange connection, made of CrNi steel → p. 112
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mapress CuNiFe flanged stub with plain end, for loose flange PN 6

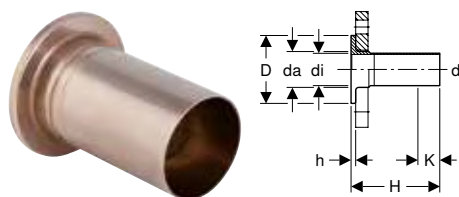

Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Characteristics

- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
68756	20	22	27	19	5	13.5	0.6	3.9	6	1	122.63
68757	25	28	32	25	6	13.5	0.6	3.7	6	1	139.23
68758	32	35	40	32	7	13.5	0.6	2.7	6	1	147.55
68759	40	42	47	39	8	13.5	0.6	0	6	1	190.47
68760	50	54	59	51	9	13.5	0.8	0	6	1	225.28
68761	65	76.1	78	72.1	11	13.5	0.8	0	6	1	254.35
68762	80	88.9	91	84.9	12.8	13.5	1	0	6	1	293.93
68763	100	108	110	104	14.8	13.5	1	0	6	1	351.16


To order additionally

- Loose flange

Accessories

- Geberit flange gasket PN 6 → p. 111

Geberit Mapress CuNiFe flanged stub with plain end, for loose flange PN 10/16



Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Suitable for loose flange, in accordance with EN 1092-1, flange type 02

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	da [mm]	di, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
68791	20	22	27	19	5.8	13.5	0.6	3.5	10 / 16	1	114.93
68793	25	28	32	25	6.8	13.5	0.6	3.7	10 / 16	1	139.55
68794	32	35	40	32	7.8	13.5	0.6	2.5	10 / 16	1	186.68
68795	40	42	47	39	8.8	13.5	0.6	0	10 / 16	1	217.80
68796	50	54	59	51	10.2	13.5	0.8	0	10 / 16	1	271.17
68797	65	76.1	78	72.1	12.2	13.5	0.8	0	10 / 16	1	428.80
68798	80	88.9	91	84.9	13.8	13.5	1	0	10 / 16	1	508.19
68799	100	108	110	104	15.8	13.5	1	0	10 / 16	1	601.50

To order additionally


- Loose flange

Accessories

- Geberit flange gasket PN 10/16 → p. 112

Feed-throughs

Geberit Mapress CuNiFe bulkhead and deck passing with two plain ends



Application purposes

- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Protective tube for welding
- Protective tube made of steel 1.0039, coated

Technical data

Product material	CuNi10Fe1.6Mn, material no. 2.1972.11
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	l [cm]	SU1 [pc.]	GBP/pc.
92080	12	15	2.5	45	16.5	1	104.20
92082	20	22	3.4	45	16.5	1	111.32
92083	25	28	3.8	45	16.5	1	123.14
92084	32	35	4.5	45	16.5	1	149.19
92085	40	42	5.4	45	16.5	1	169.41
92086	50	54	7	45	16.5	1	196.56
92087	65	76.1	8.9	45	16.5	1	442.87
92088	80	88.9	10.8	45	16.5	1	494.97
92089	100	108	13.3	45	16.5	1	547.05

Accessories for Geberit Mapress CuNiFe

System seals

Geberit Mapress seal ring, CIIR, black



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Silicone-free (LABS-free)

Technical data

Operating temperature	-30 – +120 °C
Product material	CIIR

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
90402	12	15	50	10		0.45
90404	20	22	50	10		0.57
90405	25	28	50	10		0.62
90406	32	35	50	10		0.62
90407	40	42		10		0.91
90408	50	54		10		0.91
90409	65	76.1			1	2.52
90410	80	88.9			1	3.44
90411	100	108			1	6.67

Geberit Mapress seal ring, FKM, blue



Application purposes

- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Characteristics

- Silicone-free (LABS-free)


Technical data

Operating temperature	-25 – +180 °C
Product material	FKM

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90882	12	15	100	10	1.12
90884	20	22	100	10	1.61
90885	25	28	100	10	1.90
90886	32	35	100	10	2.21
90887	40	42	100	10	4.06
90888	50	54	100	10	5.68
90891	65	76.1	50	5	16.76
90892	80	88.9	50	5	20.84
90893	100	108	25	5	46.48



Geberit Mapress flat gasket, EPDM, black

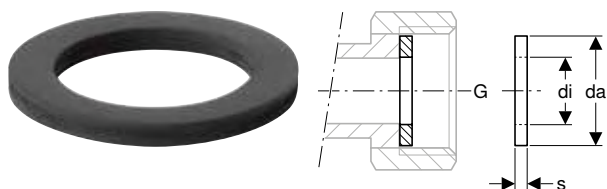

Application purposes


- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	0–100 °C
Product material	EPDM

Art. no.	G ["]	da [mm]	di, Ø [mm]	s [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90080	1/2	18	10	2		10	0.32
90081	3/4	24	13	2	50	10	0.32
90082	1	30	19.6	2		10	0.32
90083	1 1/4	39	25.6	2		10	0.51
90084	1 1/2	45	32	2		10	0.70
90085	1 3/4	50	39	2		10	0.83
90086	2 3/8	66	51	3		10	1.71

Geberit Mapress flat gasket, FPM, green

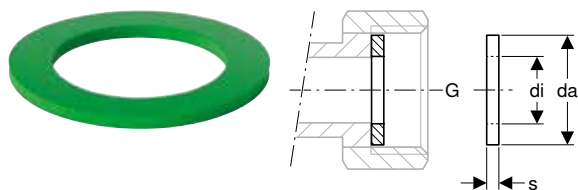

Application purposes


- For flat-sealing Geberit Mapress unions
- For solar technology, industry and shipbuilding
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	FPM

Art. no.	G ["]	da [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
90092	3/4	24	13	2	10	1.82
90094	1	30	19.6	2	10	3.22
90095	1 1/4	39	25.6	2	10	1.39
90096	1 1/2	45	32	2	10	1.71
90097	1 3/4	50	39	2	10	2.42
90098	2 3/8	66	51	2	10	4.42

Geberit Mapress flat gasket Centellen® R WS 3825

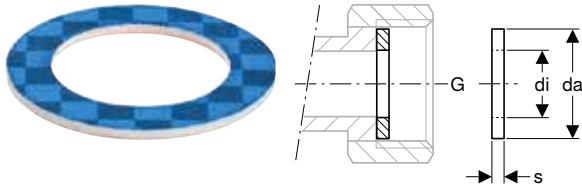

Application purposes

- For technical building systems, industry and shipbuilding
- For flat-sealing Geberit Mapress unions
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +150 °C
Product material	Centellen® R WS 3825

Art. no.	G ["]	da [mm]	di, ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
600.021.00.1	1/2	18	10	2	5	1.35
600.022.00.1	3/4	24	13	2	5	1.39
600.023.00.1	1	30	20	2	5	1.42
600.024.00.1	1 1/8	35	21	2	5	1.69
600.025.00.1	1 1/4	39	26	2	5	1.77
600.026.00.1	1 1/2	45	32	2	5	1.82
600.027.00.1	1 3/4	51	39	2	5	1.93
600.028.00.1	2	56	42	2	5	2.05
600.029.00.1	2 1/4	63	42	2	5	2.11
600.030.00.1	2 3/8	66	51	2	5	2.27
600.031.00.1	2 1/2	72	54	2	5	2.57
600.032.00.1	2 3/4	78	57	2	5	3.11
600.033.00.1	3	85	72	2	5	3.39
600.034.00.1	3 1/2	97	85	2	5	3.82

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
91041	15	44	20	2	6	1	2.23
91042	20	54	25	2	6	1	2.74
91043	25	64	30	2	6	1	3.24
91044	32	76	38	2	6	1	4.00
91045	40	86	45	2	6	1	5.02
91046	50	96	57	2	6	1	5.75
91047	65	116	76	2	6	1	6.49
91048	80	132	89	2	6	1	8.76
91049	100	152	108	2	6	1	9.99

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91031	15	50	20	2	10 / 16		1	1.77
91032	20	60	25	2	10 / 16	5	1	2.15
91033	25	70	30	2	10 / 16	5	1	2.56
91034	32	82	38	2	10 / 16	5	1	3.15
91035	40	92	45	2	10 / 16	5	1	3.93
91036	50	107	57	2	10 / 16	5	1	4.50
91037	65	127	76	2	10 / 16	5	1	5.10
91038	80	142	89	2	10 / 16	5	1	6.29
91039	100	162	108	2	10 / 16	5	1	7.88

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.47
91165	10	11	5	3.6	4	2.47
91166	12	14	5	3	4	3.08
91167	12	14	5.5	3.5	4	3.08
91168	12	14	6	4	4	2.35
91169	16	18	5.5	3.3	4	2.79
91170	16	18	6	3.8	4	2.79
91171	16	18	6.5	4.3	4	2.79
91172	16	18	7	4.8	4	2.79
91173	16	18	8	5.8	4	2.79





Geberit FlowFit

Preliminary Remarks	261
Application overview – Geberit FlowFit	263
System pipes ML	264
System pipes, heating, ML	268
Fittings	270
Couplings	270
Reducers.....	271
Bends	272
T-pieces.....	272
Adaptors, permanent.....	274
Adaptors and connections, detachable.....	280
Catches.....	290
Outlet mounting boxes	291
Connectors	294
Manifolds with threaded connection.....	306
T-pieces for heating.....	309
Adaptors and connections for heating, detachable	310
Connections for heating.....	310
Accessories	318
Insulations for pipes and fittings.....	318
Insulations for connectors.....	318
Caulks for pipes and fittings.....	319
Caulks for connections.....	320
Covers for pipes.....	320
Cover for fittings	321
Pipe fastenings.....	321
Fastenings for connectors	325
System seals.....	328
Bolt sets for flange connections.....	329
Consumables	330



Preliminary Remarks

Introduction to Geberit FlowFit

The Geberit Flexible FlowFit pressing system with inherently stable multilayer pipes and a comprehensive range of fittings is suitable for the following uses:

- Drinking water installations
- Heating and cooling water systems
- Compressed air distribution
- Vacuum systems

Benefits of Geberit FlowFit

Geberit FlowFit is a corrosion-resistant and universally applicable supply system in which the pipes and fittings are connected by pressing them together laterally to create permanent, leakproof pipes.

Geberit FlowFit is characterised by the following properties:

- The lateral pressing combined with the innovative Geberit FlowFit tool concept enables a smooth, convenient installation with shorter installation times than with conventional pressing systems.
- The flow-optimised system with lower pressure losses enables smaller pipe diameters and therefore a smaller supply system. For potable water installations, this has a positive effect on the draw-off time and potable water hygiene.
- The Geberit system pipe ML combines the stability advantages of metallic material with the corrosion resistance of plastic. The pipes are easy to bend and inherently stable. The stability of the multilayer pipe is ensured by the longitudinally welded aluminium pipe.

Geberit provides pressing tools and service-free pressing jaws for the pressing pipes and fittings.

The lateral pressing of Geberit FlowFit enables the number of the required pressing jaws to be significantly reduced. To compress the pipe and fitting, the pressing jaw no longer has to wrap around the fitting, but is placed above the pressing indicator, which is the same size for several fitting dimensions. For lateral pressing, the space requirements for the pressing are lower. Pipes can be laid at a closer distance to the wall and ceiling and pipe systems can be installed in a more space-saving manner.

Only two pressing jaws are required for the eight Geberit FlowFit dimensions:



Blue pressing jaw for the dimensions d16, 20, 25, 32 and 40 mm and orange pressing jaw for the dimensions d50, 63 and 75mm

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact us at technical@geberit.co.uk



Application overview – Geberit FlowFit

Geberit Great Britain, Version: December 2022

Application purposes	Operating temperature	Maximum operating pressure	System pipe			PPSU	
			ML	ML therm NPW	PB		
Liquid media							
For cold and hot potable water	0–70 °C ³⁾	10 bar /1000 kPa	✓		✓	✓	
For cold potable water	0–20 °C	16 bar / 1600 kPa ⁵⁾	✓		✓	✓	
For cooling and heating water without antifreeze agent	0–80 °C ⁴⁾	10 bar /1000 kPa	✓	✓		✓	
For cooling and heating water with antifreeze agent	-10 – +80 °C	10 bar /1000 kPa	✓	✓		✓	
For service water and process water	0–70 °C	10 bar /1000 kPa	6)	6)	6)	6)	
For treated water ¹⁾	0–70 °C	10 bar /1000 kPa	✓ ⁷⁾	✓ ⁷⁾	✓ ⁷⁾	✓ ⁷⁾	
For rainwater with a pH value of > 6.0	0–70 °C	10 bar /1000 kPa	✓	✓	✓	✓	
For seawater	0–70 °C	10 bar /1000 kPa	✓	✓		✓	
For chemicals and technical liquids	Upon request	Upon request	6)	6)	6)	6)	
Gaseous media							
For compressed air (oil purity class 0–3)	0–70 °C	10 bar /1000 kPa	✓	✓		✓	
For negative pressure ²⁾	0–70 °C	Abs. ≥ 0,2 bar/20 kPa	✓	✓		✓	

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Application range according to the Technical Information on 'Treated water'

²⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

³⁾ Malfunction temperature in accordance with EN 806-2: Tmal = 95 °C, total 100 h over the course of the service life

⁴⁾ Malfunction temperature in accordance with ISO 10508:2006: Tmal = 100 °C, total 100 h over the course of the service life

⁵⁾ 10 bar/1000 kPa for MasterFix

⁶⁾ Following Geberit approval

⁷⁾ Application range according to TI "Treated Waters"

⁸⁾ pH value ≥ 7.0 permissible in combination with silicon bronze or brass

⁹⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

¹⁰⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"



- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.


Fittings					O-rings	Flat gaskets for screw connections	Flange gaskets
Lead-free gunmetal	Lead-free silicon bronze	Brass	Stainless steel		EPDM, black	Centellen® HD WS 3825	Centellen® HD WS 3822
✓	✓	✓	✓		✓	✓	✓
✓	✓	✓	✓		✓	✓	✓
✓	✓	✓	✓		✓ ⁹⁾	✓	✓
✓	✓	✓	✓		✓ ⁹⁾	✓	✓
6)	6)		6)		6)	6)	6)
✓ ⁷⁾	✓ ⁷⁾		✓ ⁷⁾		✓ ⁷⁾	✓ ⁷⁾	✓ ⁷⁾
✓	✓ ⁸⁾	✓ ⁸⁾	✓		✓	✓	✓
✓	✓				✓	✓	✓
6)	6)	6)	6)		6)	6)	6)
✓	✓	✓	✓		✓ ¹⁰⁾	✓	✓
✓	✓	✓	✓		✓	✓	✓



System pipes ML

New

Geberit system pipe, ML, in bars

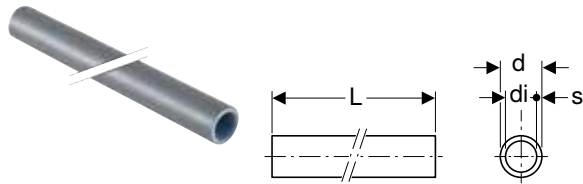

Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Characteristics

- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- Silver grey RAL 7001 exterior
- Pipe end with transparent protection plug

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	GBP/m
L / length: 3 m							
619.010.00.1	12	16	12	2	2664	72	3.62
619.011.00.1	15	20	16	2	2016	72	5.16
619.012.00.1	20	25	20	2.5	1656	72	8.49
619.013.00.1	25	32	26.4	2.8	1200	30	12.39
619.014.00.1	32	40	34	3	840	30	17.53
619.015.00.1	40	50	42.4	3.8	450	30	24.75
619.016.00.1	50	63	55	4	300	15	37.30
L / length: 5 m							
619.020.00.1	12	16	12	2	4440	120	3.49
619.021.00.1	15	20	16	2	3360	120	4.91
619.022.00.1	20	25	20	2.5	2760	120	8.06
619.023.00.1	25	32	26.4	2.8	2000	50	11.98
619.024.00.1	32	40	34	3	1400	50	16.69
619.025.00.1	40	50	42.4	3.8	750	50	23.64
619.026.00.1	50	63	55	4	500	25	35.62
619.027.00.1	65	75	65.8	4.6	300	25	56.48


Available as of April 2023

Accessories

- Geberit pliers → p. 434
- Geberit FlowFit calibration tool → p. 435
- Geberit pipe cutter ML → p. 434
- Geberit insulation hose → p. 318
- Geberit anchor-point fastening → p. 322

New

Geberit system pipe, ML, in coils



Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Characteristics

- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- Silver grey RAL 7001 exterior
- Pipe end with transparent protection plug

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
619.050.00.1	12	16	12	2	50	500	50	3.06
619.060.00.1	12	16	12	2	120	720	120	2.92
619.070.00.1	12	16	12	2	250	1250	250	2.92
619.051.00.1	15	20	16	2	50	500	50	4.17
619.061.00.1	15	20	16	2	100	600	100	4.05
619.052.00.1	20	25	20	2.5	50	250	50	6.95
619.054.00.1	25	32	26.4	2.8	25	125	25	10.30

Available as of April 2023


Accessories

- Geberit pliers → p. 434
- Geberit FlowFit calibration tool → p. 435
- Geberit pipe cutter ML → p. 434
- Geberit insulation hose → p. 318



New

Geberit system pipe, ML, in protective tube, in coils



Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, silver grey RAL 7001 exterior
- Ice blue protective tube
- Pipe end with transparent protection plug

Scope of delivery

- 7 protection plugs, blue
- 7 protection plugs, red

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
619.220.00.1	12	16	12	2.7	2	50	500	50	3.76
619.221.00.1	15	20	16	3.1	2	50	300	50	5.30


Available as of April 2023

Accessories

- Geberit pliers → p. 434
- Geberit FlowFit calibration tool → p. 435

New

Geberit system pipe ML, with circular pre-insulation, in coils



Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, silver grey RAL 7001 exterior
- Closed-cell insulation, blue protective foil
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm										
619.100.00.1	12	16	12	2.8	2	6	50	300	50	3.90
619.101.00.1	15	20	16	3.2	2	6	50	300	50	5.41
619.102.00.1	20	25	20	3.7	2.5	6	25	150	25	9.04
619.103.00.1	25	32	26.4	4.4	2.8	6	25	100	25	13.34

Available as of April 2023

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 10 mm										
619.120.00.1	12	16	12	3.6	2	10	50	250	50	4.42
619.121.00.1	15	20	16	4	2	10	50	200	50	6.11
619.122.00.1	20	25	20	4.5	2.5	10	25	125	25	10.30
619.123.00.1	25	32	26.4	5.2	2.8	10	25	100	25	14.86
Insulation: 13 mm										
619.140.00.1	12	16	12	4.2	2	13	50	200	50	5.41
619.141.00.1	15	20	16	4.6	2	13	50	200	50	7.34
619.142.00.1	20	25	20	5.1	2.5	13	25	100	25	12.39
619.143.00.1	25	32	26.4	5.8	2.8	13	25	100	25	18.03
Insulation: 26 mm										
619.160.00.1	12	16	12	6.8	2	26	25	100	25	6.11
619.161.00.1	15	20	16	7.2	2	26	20	80	20	8.38
619.162.00.1	20	25	20	7.7	2.5	26	15	60	15	13.91


Available as of April 2023

Accessories

- Geberit pliers → p. 434
- Geberit pipe cutter ML → p. 434
- Geberit FlowFit calibration tool → p. 435

New

Geberit system pipe ML, with circular pre-insulation, in coils



Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, silver grey RAL 7001 exterior
- Closed-cell insulation, red protective foil
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm										
619.110.00.1	12	16	12	2.8	2	6	50	300	50	3.90
619.111.00.1	15	20	16	3.2	2	6	50	300	50	5.41
619.112.00.1	20	25	20	3.7	2.5	6	25	150	25	9.04

Available as of April 2023

Accessories


- Geberit pliers → p. 434
- Geberit FlowFit calibration tool → p. 435



System pipes, heating, ML

New

Geberit system pipe, ML, Therm, in coils



Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Characteristics

- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- White exterior
- Pipe end with transparent protection plug

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
619.130.00.1	12	16	12	2	120	720	120	2.33
619.131.00.1	12	16	12	2	250	1250	250	1.90
619.133.00.1	15	20	16	2	100	600	100	3.01
619.135.00.2	20	25	20	2.5	50	250	50	5.55


Available as of April 2023

Accessories

- Geberit pliers → p. 434
- Geberit pipe cutter ML → p. 434
- Geberit FlowFit calibration tool → p. 435

New

Geberit system pipe ML, Therm, with circular pre-insulation, in coils



Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, white exterior
- Closed-cell insulation, red protective foil
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm										
619.150.00.1	12	16	12	2.8	2	6	50	300	50	3.15
619.151.00.1	15	20	16	3.2	2	6	50	300	50	4.33
619.152.00.1	20	25	20	3.7	2.5	6	25	150	25	7.25
Insulation: 10 mm										
619.170.00.1	12	16	12	3.6	2	10	50	250	50	3.53
619.171.00.1	15	20	16	4	2	10	50	200	50	4.91
619.172.00.1	20	25	20	4.5	2.5	10	25	125	25	9.87


Available as of April 2023

Accessories

- Geberit pliers → p. 434
- Geberit pipe cutter ML → p. 434
- Geberit FlowFit calibration tool → p. 435

New

Geberit system pipe, ML, Therm, with eccentric pre-insulation, in coils



Application purposes

- For Geberit FlowFit
- For Geberit PushFit
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.41 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, white exterior
- Closed-cell insulation, grey protective foil
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	Insulation [mm]	di, ø [mm]	s [mm]	s1 [mm]	L [m]	B [cm]	H [cm]	SU4 [m]	SU2 [m]	GBP/m
619.180.00.1	12	16	13	12	2	6 / 13	50	3.9	3.9	200	50	5.41
619.181.00.1	15	20	13	16	2	6 / 13	50	4.3	4.3	200	50	7.34
619.182.00.1	20	25	13	20	2.5	6 / 13	25	4.9	4.9	100	25	12.39

Available as of April 2023

Accessories

- Geberit pliers → p. 434
- Geberit pipe cutter ML → p. 434
- Geberit FlowFit calibration tool → p. 435




Fittings

Couplings

New

Geberit FlowFit coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data


Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.010.00.1	12	16	7.7	1.2	150	10		4.17
620.011.00.1	15	20	7.7	1.2	130	10		4.91
620.012.00.1	20	25	7.7	1.2	100	10		7.22
620.013.00.1	25	32	8.7	1.5	50	10		10.30
620.014.00.1	32	40	8.7	1.5	20	5		15.85
620.015.00.1	40	50	14.1	2.2	15	5		24.46
620.016.00.1	50	63	15.1	2.4	10		1	45.59
620.017.00.1	65	75	15.1	2.4	5		1	83.48

Available as of April 2023

New

Geberit FlowFit long coupling



Application purposes

- For creating additional connections in existing pipelines
- For connecting prefabricated pipe sections with length compensation
- For technical building systems, industry and shipbuilding
- For repairing damaged Geberit system pipes ML
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------


Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.020.00.1	12	16	20	13.5	25	1	81.80
620.021.00.1	15	20	20	13.5	25	1	117.27
620.022.00.1	20	25	20	13.5	25	1	152.69
620.023.00.1	25	32	22.2	15	10	1	190.85
620.024.00.1	32	40	23.5	16.3	10	1	259.06
620.025.00.1	40	50	34	22	5	1	354.45

Available as of April 2023

Reducers

New

Geberit FlowFit reducer



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	PPSU
------------------	------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Concentric
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.031.00.1	15 / 12	20	16	8.4	1.9	130	10		4.91
620.032.00.1	20 / 12	25	16	8.4	1.9	100	10		7.22
620.042.00.1	20 / 15	25	20	8.4	1.9	100	10		7.22
620.033.00.1	25 / 15	32	20	8.9	2	50	10		10.30
620.043.00.1	25 / 20	32	25	8.9	2	50	10		10.30
620.034.00.1	32 / 15	40	20	9.2	2.3	30	5		15.85
620.044.00.1	32 / 20	40	25	8.9	2	30	5		15.85
620.054.00.1	32 / 25	40	32	9.4	2.1	30	5		15.85
620.035.00.1	40 / 25	50	32	12.2	2.7	20	5		24.46
620.045.00.1	40 / 32	50	40	12.2	2.7	20	5		24.46
620.036.00.1	50 / 32	63	40	12.9	3	10		1	45.59
620.046.00.1	50 / 40	63	50	15.7	3.4	10		1	45.59
620.037.00.1	65 / 32	75	40	13.6	3.7	5		1	83.48
620.047.00.1	65 / 40	75	50	15.7	3.4	5		1	83.48
620.057.00.1	65 / 50	75	63	16.2	3.5	5		1	83.48


Available as of April 2023



Bends

New

Geberit FlowFit bend

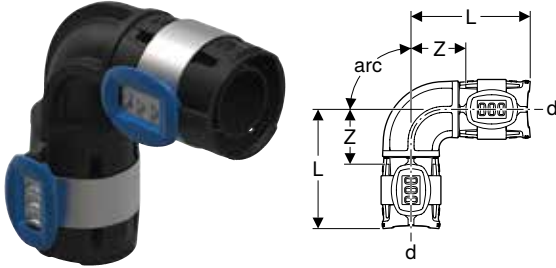

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	PPSU
------------------	------


Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°								
620.062.00.1	20	25	5.2	1.9	50	10		9.72
620.063.00.1	25	32	5.9	2.3	30	10		12.80
620.064.00.1	32	40	5.9	2.5	20	5		21.49
620.065.00.1	40	50	9	3	15	5		32.84
620.066.00.1	50	63	9.9	3.5	10		1	51.21
620.067.00.1	65	75	9.9	3.5	5		1	97.36
arc / angle: 90°								
620.070.00.1	12	16	5.8	2.5	120	10		5.30
620.071.00.1	15	20	6	2.7	100	10		6.68
620.072.00.1	20	25	6.2	2.9	50	10		9.72
620.073.00.1	25	32	7	3.4	40	5		12.80
620.074.00.1	32	40	7.5	3.9	30	5		21.49
620.075.00.1	40	50	11.5	5.6	15	5		32.84
620.076.00.1	50	63	12.5	6.1	10		1	51.21
620.077.00.1	65	75	13	6.7	8		1	97.36

Available as of April 2023

T-pieces

New

Geberit FlowFit T-piece, equal

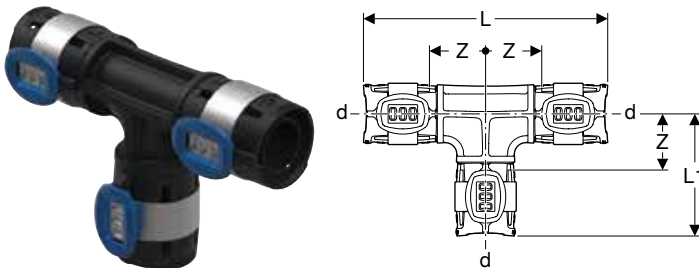

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data


Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.080.00.1	12	16	11.5	5.8	2.5	70	10		7.65
620.081.00.1	15	20	11.9	6	2.7	50	10		8.88
620.082.00.1	20	25	12.4	6.2	2.9	50	10		13.34
620.083.00.1	25	32	14	7	3.4	30	10		19.48
620.084.00.1	32	40	15	7.5	3.9	20	5		27.83
620.085.00.1	40	50	23	11.5	5.6	5		1	45.91
620.086.00.1	50	63	24.9	12.5	6.1	5		1	77.02
620.087.00.1	65	75	26.1	13.1	6.7	4		1	155.72

Available as of April 2023

New

Geberit FlowFit T-piece, reduced

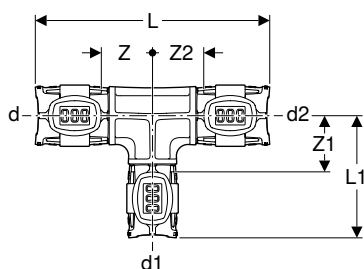

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	PPSU
------------------	------

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap


Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.121.00.1	12 / 15 / 12	16	20	16	11.9	5.8	2.7	2.5	2.7	60	10		8.88
620.101.00.1	15 / 12 / 12	20	16	16	11.5	6	2.4	2.7	2.5	50	10		8.88
620.111.00.1	15 / 12 / 15	20	16	20	11.5	6	2.5	2.7	2.5	50	10		8.88
620.131.00.1	15 / 15 / 12	20	20	16	11.9	6	2.7	2.7	2.7	60	10		8.88
620.132.00.1	15 / 20 / 15	20	25	20	12.4	6	2.9	2.7	2.9	60	10		13.34
620.112.00.1	20 / 12 / 20	25	16	25	11.5	6.2	2.5	2.9	2.5	50	10		13.34
620.102.00.1	20 / 15 / 15	25	20	20	11.9	6.2	2.7	2.9	2.7	50	10		13.34
620.122.00.1	20 / 15 / 20	25	20	25	11.9	6.2	2.7	2.9	2.7	50	10		13.34
620.142.00.1	20 / 20 / 15	25	25	20	12.4	6.2	2.9	2.9	2.9	50	10		13.34
620.113.00.1	25 / 12 / 25	32	16	32	12	6.7	2.4	3.4	2.4	30	10		19.48
620.123.00.1	25 / 15 / 20	32	20	25	12.2	6.7	2.7	3.4	2.7	30	10		19.48
620.133.00.1	25 / 15 / 25	32	20	32	12.5	6.7	2.7	3.4	2.7	40	10		19.48
620.103.00.1	25 / 20 / 20	32	25	25	12.7	6.7	2.9	3.4	2.9	40	10		19.48
620.143.00.1	25 / 20 / 25	32	25	32	13	6.7	2.9	3.4	2.9	40	10		19.48
620.104.00.1	32 / 15 / 32	40	20	40	12.7	7.2	2.8	3.9	2.8	20	5		27.83
620.114.00.1	32 / 20 / 32	40	25	40	13.2	7.1	3	3.8	3	20	5		27.83
620.124.00.1	32 / 25 / 32	40	32	40	14.2	7.4	3.5	3.8	3.5	20	5		27.83
620.115.00.1	40 / 20 / 40	50	25	50	18.9	8.3	3.5	5	3.5	5		1	45.91
620.125.00.1	40 / 25 / 40	50	32	50	19.9	8.6	4	5	4	5		1	45.91
620.105.00.1	40 / 32 / 32	50	40	40	17.9	8.7	4	5	4.4	5		1	45.91
620.135.00.1	40 / 32 / 40	50	40	50	20.7	8.7	4.4	5	4.4	5		1	45.91
620.106.00.1	50 / 20 / 50	63	25	63	19.4	9	3.4	5.7	3.4	5		1	77.02
620.116.00.1	50 / 25 / 50	63	32	63	20.4	9.3	3.9	5.7	3.9	5		1	77.02
620.126.00.1	50 / 32 / 50	63	40	63	21.2	9.4	4.3	5.8	4.3	5		1	77.02
620.136.00.1	50 / 40 / 50	63	50	63	23.5	12.2	5.4	6.3	5.4	5		1	77.02
620.107.00.1	65 / 20 / 65	75	25	75	19.4	9.6	3.4	6.3	3.4	5		1	155.72
620.117.00.1	65 / 25 / 65	75	32	75	20.4	9.9	3.9	6.3	3.9	5		1	155.72
620.127.00.1	65 / 32 / 65	75	40	75	21.2	10	4.3	6.4	4.3	5		1	155.72
620.137.00.1	65 / 40 / 65	75	50	75	23.5	12.8	5.4	6.9	5.4	5		1	155.72
620.147.00.1	65 / 50 / 65	75	63	75	24.9	13	6.1	6.7	6.1	5		1	155.72

Available as of April 2023



New

Geberit FlowFit T-piece with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug


Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.150.00.1	12 / 15 / 12	16	1/2	16	11.9	2.4	2.7	1.1	50	10		22.81
620.151.00.1	15	20	1/2	20	11.9	2.4	2.7	1.1	50	10		26.72
620.157.00.1	20 / 15 / 15	25	1/2	20	11.9	2.6	2.7	1.3	25	5		35.62
620.152.00.1	20 / 15 / 20	25	1/2	25	11.9	2.6	2.7	1.3	25	5		35.62
620.162.00.1	20	25	3/4	25	12.8	2.8	3.1	1.5	25	5		35.62
620.153.00.1	25 / 15 / 25	32	1/2	32	13	3.1	2.9	1.3	25	5		46.77
620.163.00.1	25 / 20 / 25	32	3/4	32	13.4	3.1	3.1	1.7	25	5		46.77
620.173.00.1	25	32	1	32	14.4	3.1	3.6	1.6	25	5		46.77
620.154.00.1	32 / 15 / 32	40	1/2	40	13.4	3.4	3.1	1.9	25	5		56.73
620.164.00.1	32 / 20 / 32	40	3/4	40	14.7	3.5	3.8	2.1	20	5		56.73
620.174.00.1	32 / 25 / 32	40	1	40	14.7	4.2	3.8	2.3	20	5		56.73
620.184.00.1	32	40	1 1/4	40	15.4	4.4	4.1	2.3	20	5		56.73
620.155.00.1	40 / 15 / 40	50	1/2	50	18.5	4.1	3.3	2.4	10		1	80.10
620.185.00.1	40	50	1 1/2	50	22	4.6	5.1	2.3	10		1	80.10
620.165.00.1	40 / 20 / 40	50	3/4	50	20.2	4	4.2	2.6	10		1	80.10
620.175.00.1	40 / 25 / 40	50	1	50	20.2	4.6	4.2	2.5	10		1	80.10
620.156.00.1	50 / 15 / 50	63	1/2	63	20.5	4.6	3.9	3.1	5		1	194.67
620.166.00.1	50 / 25 / 50	63	1	63	22	5.1	4.7	3.2	5		1	194.67
620.176.00.1	50	63	2	63	24.6	6.6	6	4	5		1	194.67
620.177.00.1	65 / 25 / 65	75	1	75	21.6	5.4	4.5	3.5	5		1	305.92

Available as of April 2023

Adaptors, permanent

New

Geberit FlowFit adaptor to Geberit Mepla



Application purposes

- For technical building systems, industry and shipbuilding
- Suitable for use as adaptor from Geberit FlowFit to Geberit Mepla
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Pressable only with Geberit FlowFit pressing jaw
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.090.00.1	12	16	16	7.8	1.3	10	1	7.77
620.091.00.1	15	20	20	7.8	1.3	10	1	10.01
620.092.00.1	20	25	26	7.8	1.3	10	1	13.91
620.093.00.1	25	32	32	8.8	1.6	10	1	18.93
620.094.00.1	32	40	40	8.8	1.6	10	1	22.24
620.095.00.1	40	50	50	14	2.1	10	1	50.07
620.096.00.1	50	63	63	15	2.3	5	1	77.86
620.097.00.1	65	75	75	15	2.3	5	1	105.67

Available as of April 2023

New

Geberit FlowFit adaptor to Geberit Mapress, with plain end

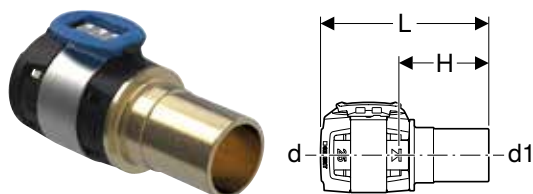

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.230.00.1	12 / 10	16	12	6.8	3.5	25	5		7.77
620.240.00.1	12	16	15	6.9	3.6	50	10		7.77
620.231.00.1	15 / 12	20	15	6.9	3.6	50	10		10.01
620.241.00.1	15	20	18	6.9	3.6	50	10		10.01
620.242.00.1	15 / 20	20	22	7	3.7	50	10		10.01
620.232.00.1	20	25	22	7	3.7	25	5		13.91
620.233.00.1	25	32	28	7.7	4.1	25	5		18.93
620.234.00.1	32	40	35	8	4.4	25	5		22.24
620.235.00.1	40	50	42	12.8	6.9	10		1	50.07
620.236.00.1	50	63	54	13.8	7.5	5		1	77.86

Available as of April 2023



New

Geberit FlowFit adaptor to Geberit Mapress, with plain end, stainless steel

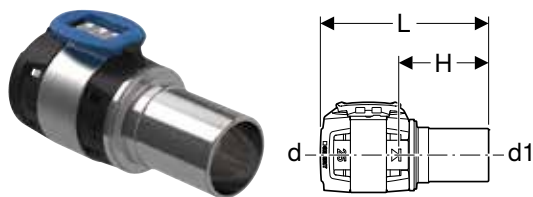

Application purposes

- Suitable exclusively for pressing in Geberit Mapress pressing sockets
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Plain end for protective cap

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.250.00.1	12	16	15	7.1	3.8	10	1	18.53
620.251.00.1	15	20	18	7.1	3.8	10	1	21.81
620.252.00.1	15 / 20	20	22	7.2	3.9	10	1	21.81
620.253.00.1	20	25	22	7.2	3.9	10	1	27.24
620.254.00.1	25	32	28	7.9	4.3	10	1	35.49
620.255.00.1	32	40	35	8.2	4.6	10	1	47.99
620.256.00.1	40	50	42	12.5	6.6	5	1	81.80
620.257.00.1	50	63	54	14.2	7.9	5	1	106.37

Available as of April 2023

New

Geberit FlowFit adaptor to Geberit Mapress, with pressing socket, stainless steel

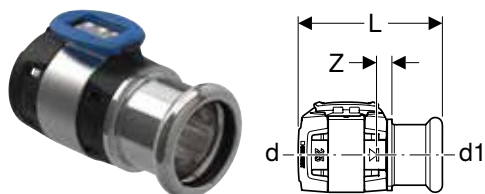

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- Seal ring made of CIIR, black
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with transparent protection plug

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.329.00.1	12 / 10	16	12	5.4	0.6	10	1	18.53
620.332.00.1	12	16	15	5.6	0.6	10	1	18.53
620.347.00.1	15 / 12	20	15	5.6	0.6	10	1	21.81
620.333.00.1	15	20	18	5.6	0.6	10	1	21.81
620.334.00.1	15 / 20	20	22	5.7	0.6	10	1	21.81
620.335.00.1	20	25	22	5.7	0.6	10	1	27.24
620.336.00.1	25	32	28	6.4	0.8	10	1	35.49
620.337.00.1	32	40	35	6.7	0.8	10	1	47.99
620.338.00.1	40	50	42	9.7	1.1	5	1	81.80
620.339.00.1	50	63	54	10.7	1.2	5	1	106.37

Available as of April 2023

New

Geberit FlowFit adaptor with male thread

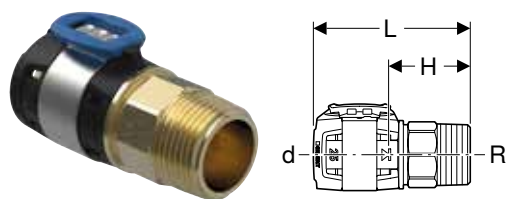

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap


Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.300.00.1	12 / 10	16	3/8	6.1	2.8	18	50	10		6.68
620.310.00.1	12 / 15	16	1/2	6.1	2.8	22	50	10		6.68
620.320.00.1	12 / 20	16	3/4	6.5	3.2	27	50	10		6.68
620.301.00.1	15 / 10	20	3/8	6.1	2.8	18	50	10		9.19
620.311.00.1	15	20	1/2	6.4	3.1	22	50	10		9.19
620.321.00.1	15 / 20	20	3/4	6.5	3.2	27	50	10		9.19
620.308.00.1	15 / 25	20	1	6.4	3.1	34	50	10		9.19
620.302.00.1	20 / 15	25	1/2	6.4	3.1	22	25	5		11.66
620.312.00.1	20	25	3/4	6.8	3.5	27	50	5		11.66
620.322.00.1	20 / 25	25	1	6.6	3.3	34	25	5		11.66
620.309.00.1	25 / 20	32	3/4	7.5	3.9	27	25	5		14.45
620.303.00.1	25	32	1	7.5	3.9	34	25	5		14.45
620.313.00.1	25 / 32	32	1 1/4	7.2	3.6	43	25	5		14.45
620.304.00.1	32 / 25	40	1	7.4	3.8	47	25	5		21.72
620.314.00.1	32	40	1 1/4	7.4	3.8	47	25	5		21.72
620.324.00.1	32 / 40	40	1 1/2	7.3	3.7	49	25	5		21.72
620.305.00.1	40	50	1 1/2	10	4.1	59	20	2		47.85
620.315.00.1	40 / 50	50	2	10.4	4.4	60	20	2		47.85
620.306.00.1	50	63	2	11	4.7	74	10	2		72.31
620.316.00.1	50 / 65	63	2 1/2	11.3	4.9	76	10	2		72.31
620.307.00.1	65	75	2 1/2	11.4	5	86	5		1	139.05

Available as of April 2023



New

Geberit FlowFit adaptor with male thread, stainless steel

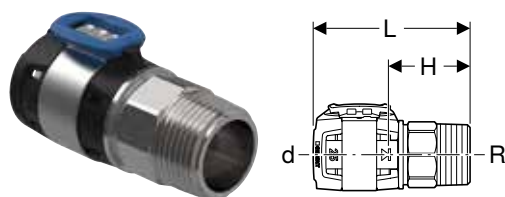

Application purposes

- For technical building systems, industry and shipbuilding
- For industry
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap

Technical data


Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.700.00.1	15	20	1/2	6.4	3.1	22	25	1	79.11
619.701.00.1	20	25	3/4	6.8	3.5	27	25	1	98.13
619.702.00.1	25	32	1	7.5	3.9	34	25	1	125.44
619.703.00.1	32	40	1 1/4	7.4	3.8	47	10	1	163.58
619.704.00.1	40	50	1 1/2	10	4.1	59	10	1	212.66
619.705.00.1	50	63	2	11	4.7	74	10	1	272.65
619.706.00.1	65	75	2 1/2	11.4	5	86	5	1	354.45

Available as of April 2023

New

Geberit FlowFit adaptor with female thread

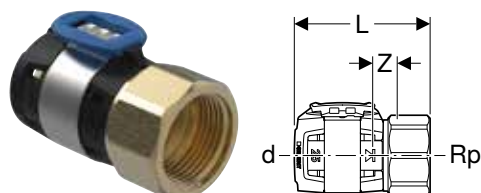

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.400.00.1	12 / 10	16	3/8	5.1	1	22	50	10		6.68
620.410.00.1	12 / 15	16	1/2	5.6	1.3	27	50	10		6.68
620.420.00.1	12 / 20	16	3/4	5.8	1.3	32	50	10		6.68
620.401.00.1	15 / 10	20	3/8	5.3	1.2	22	50	10		9.19
620.411.00.1	15	20	1/2	5.5	1.1	27	50	10		9.19
620.421.00.1	15 / 20	20	3/4	5.8	1.3	32	50	10		9.19
620.402.00.1	20	25	3/4	5.7	1.2	32	50	5		13.91
620.412.00.1	20 / 25	25	1	6.1	1.5	41	25	5		13.91
620.403.00.1	25	32	1	6.4	1.4	41	25	5		18.34
620.413.00.1	25 / 32	32	1 1/4	6.7	1.5	47	25	5		18.34
620.404.00.1	32 / 25	40	1	6.4	1.4	47	25	5		21.72
620.414.00.1	32	40	1 1/4	6.7	1.5	47	25	5		21.72
620.424.00.1	32 / 40	40	1 1/2	6.7	1.5	54	25	5		21.72
620.405.00.1	40	50	1 1/2	9.3	1.7	60	20	2		47.85
620.415.00.1	40 / 50	50	2	9.7	1.8	67	20	2		47.85
620.406.00.1	50	63	2	10.2	1.9	75	10	2	1	72.31
620.416.00.1	50 / 65	63	2 1/2	10.7	1.9	83	10	2	1	72.31
620.407.00.1	65	75	2 1/2	10.7	2.5	86	5		1	139.05

Available as of April 2023

New

Geberit FlowFit bend adaptor 90° with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.510.00.1	12 / 15	16	1/2	5.7	2.5	2.4	50	10		12.25
620.520.00.1	12 / 20	16	3/4	6	3.1	2.7	50	10		12.25
620.511.00.1	15	20	1/2	6.1	2.8	2.8	50	10		15.02
620.521.00.1	15 / 20	20	3/4	6	2.7	2.7	50	10		15.02
620.502.00.1	20	25	3/4	6	2.9	2.7	25	5		23.89
620.512.00.1	20 / 25	25	1	6.3	3.2	3	25	5		23.89
620.503.00.1	25	32	1	6.8	3.1	3.2	25	5		34.22
620.504.00.1	32	40	1 1/4	7.3	4.2	3.7	25	5		41.99
620.505.00.1	40	50	1 1/2	10.4	4.7	4.5	10	2		61.19
620.506.00.1	50	63	2	11.7	5.8	5.4	5		1	127.91

Available as of April 2023

New

Geberit FlowFit 90° bend adaptor with male thread, long

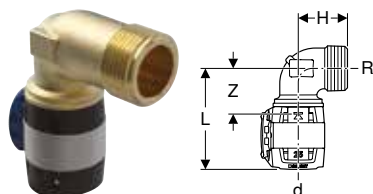

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.522.00.1	12 / 15	16	1/2	5.7	3.7	2.4	50	10	13.48
620.523.00.1	12 / 20	16	3/4	6	4.5	2.7	50	10	13.48
620.524.00.1	15	20	1/2	6.1	3.7	2.8	50	10	16.51
620.525.00.1	15 / 20	20	3/4	6	4.5	2.7	50	10	16.51
620.526.00.1	20	25	3/4	6	4.5	2.7	25	5	26.32
620.527.00.1	20 / 25	25	1	6.3	5.6	3	25	5	26.32
620.528.00.1	25	32	1	6.8	5.6	3.2	25	5	37.73

Available as of April 2023

New

Geberit FlowFit bend adaptor 90° with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.540.00.1	12 / 15	16	1/2	6.1	2.2	2.8	0.9	50	10		12.25
620.550.00.1	12 / 20	16	3/4	6.3	2.5	3	1.2	50	10		12.25
620.541.00.1	15	20	1/2	6.1	2.4	2.8	1.1	50	10		15.02
620.551.00.1	15 / 20	20	3/4	6.5	2.6	3.2	1.3	50	10		15.02
620.532.00.1	20	25	3/4	6.5	2.8	3.2	1.5	25	5		23.89
620.542.00.1	20 / 25	25	1	6.9	3	3.6	1.4	25	5		23.89
620.533.00.1	25	32	1	7.4	3.4	3.8	1.8	25	5		34.22
620.534.00.1	32	40	1 1/4	8.1	3.7	4.5	2.2	25	5		41.99
620.535.00.1	40	50	1 1/2	11.2	4.5	5.3	3	10	2		61.19
620.536.00.1	50	63	2	12.8	5.3	6.4	3.5	5		1	127.91

Available as of April 2023

Adaptors and connections, detachable

New

Geberit FlowFit adaptor with MasterFix



Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- MasterFix with blue protective cap

Technical data


Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.290.00.1	12 / 15	16	1/2	7.6	2.8	40	10	8.38
620.291.00.1	15	20	1/2	7.6	2.8	40	10	10.58

Available as of April 2023

New

Geberit FlowFit elbow adaptor 90° with MasterFix

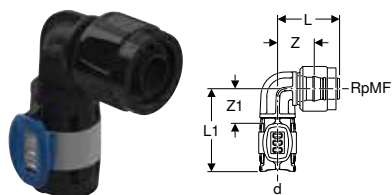

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- MasterFix with blue protective cap

Technical data


Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.490.00.1	12 / 15	16	1/2	4.3	5.8	2.7	2.5	40	10	9.72
620.491.00.1	15	20	1/2	4.3	5.8	2.8	2.5	40	10	10.58

Available as of April 2023

New

Geberit FlowFit T-piece adaptor with MasterFix, through-flow

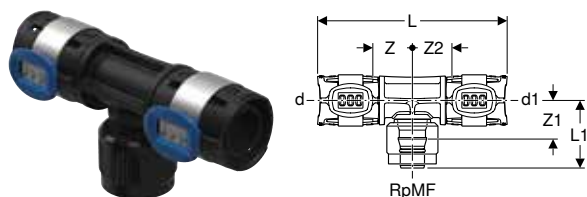

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- MasterFix with blue protective cap

Technical data


Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	RpMF ["]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.380.00.1	12 / 15 / 12	16	1/2	16	11.5	4.3	2.5	2.7	2.5	30	5	11.98
620.381.00.1	15 / 15 / 12	20	1/2	16	11.5	4.3	2.5	2.8	2.5	30	5	14.45
620.391.00.1	15	20	1/2	20	11.5	4.3	2.5	2.8	2.5	30	5	14.45
620.382.00.1	20 / 15 / 15	25	1/2	20	11.5	4.1	2.5	2.6	2.5	20	5	16.69
620.392.00.1	20 / 15 / 20	25	1/2	25	11.5	4.1	2.5	2.6	2.5	20	5	16.69

Available as of April 2023

New

Geberit FlowFit T-piece adaptor with MasterFix, branch fitting



Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing connector with transparent protective cap
- Leaky if unpressed
- O-ring made of EPDM
- Pressing indicator
- MasterFix with blue protective cap


Technical data

Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	RpMF1 ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.780.00.1	12/12/15	16	16	1/2	10.4	5.8	2.5	2.5	3.1	30	5	11.98
620.781.00.1	15	20	20	1/2	10.8	6	2.7	2.7	3.3	30	5	14.45

Available as of April 2023

Geberit adaptor with male thread MF 1/2" and male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
632.007.00.1	15	1/2	1/2	4.2	10	1	12.19
632.008.00.1	20 / 15	1/2	3/4	4.2	10	1	16.65

Geberit adaptor with male thread MF 1/2" and male thread, stainless steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13

Characteristics


- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Technical data

Product material	CrNiMo steel 1.4401 (EN 10088)
------------------	--------------------------------

Art. no.	DN	RMF ["]	R ["]	H [cm]	SU1 [pc.]	GBP/pc.
632.005.00.1	15	1/2	1/2	4.2	1	33.03

Geberit adaptor with male thread MF 1/2" and female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Flat gasket made of Centellen® R WS 3825


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	G ["]	L [cm]	L1 [cm]	I1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
632.006.00.1	15	1/2	1/2	3.8	2.3	0.8	50	10	8.29

New

Geberit FlowFit adaptor to Compact



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Removable
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap


Art. no.	DN	d, ø [mm]	di, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.560.00.1	12	16	21	5.4	2.4	20	5	6.95
620.561.00.1	15	20	21	5.4	2.4	20	5	8.38
620.562.00.1	20	25	21	5.5	2.4	20	5	10.58

Available as of April 2023



New

Geberit FlowFit screw connection

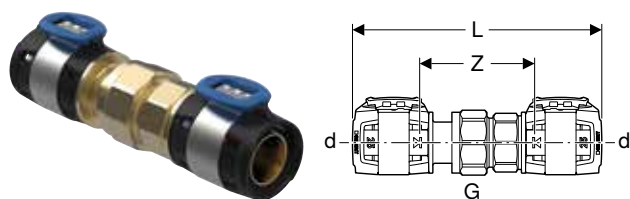

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics


- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of Centellen® HD 3822

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.570.00.1	12	16	1/2	11.5	5	24	50	5		23.64
620.571.00.1	15	20	1/2	11.7	5.2	24	50	5		29.17
620.572.00.1	20	25	3/4	12.1	5.6	30	40	5		35.62
620.573.00.1	25	32	1	13.9	6.7	38	10		1	48.40
620.574.00.1	32	40	1 1/4	13.9	6.7	46	10		1	60.33
620.575.00.1	40	50	1 1/2	19.1	7.2	55	10		1	111.24
620.576.00.1	50	63	2	20.5	7.8	67	5		1	230.82

Available as of April 2023

New

Geberit FlowFit adaptor union with male thread

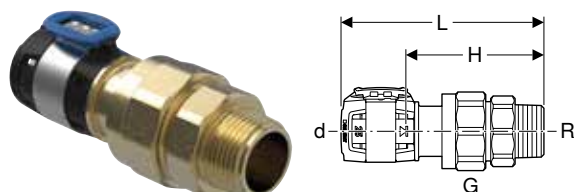

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protective cap
- Flat gasket made of Centellen® HD 3822

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.580.00.1	12 / 15	16	1/2	3/4	8.7	5.4	30	50	10		19.48
620.581.00.1	15	20	1/2	3/4	9.3	6	30	50	10		23.89
620.591.00.1	15 / 20	20	3/4	1	9.4	6.1	30	40	5		23.89
620.582.00.1	20	25	3/4	1	10.2	6.9	38	25	5		30.57
620.583.00.1	25	32	1	1 1/4	10.5	6.9	46	25	5		46.15
620.593.00.1	25 / 32	32	1 1/4	1 1/2	10.8	7.2	46	10	2		46.15
620.584.00.1	32	40	1 1/4	1 1/2	11.3	7.7	55	25	5		58.41
620.594.00.1	32 / 40	40	1 1/2	1 3/4	11.3	7.7	55	10	2		58.41
620.585.00.1	40	50	1 1/2	1 3/4	14.9	9	62	10		1	111.24
620.595.00.1	40 / 50	50	2	2 3/4	14.9	8.9	67	10		1	111.24
620.586.00.1	50	63	2	2 3/4	15.3	8.9	89	5		1	161.32
620.596.00.1	50 / 65	63	2 1/2	2 3/4	15.5	9.2	89	5		1	161.32

Available as of April 2023

New**Geberit FlowFit adaptor union with female thread****Application purposes**

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug
- Flat gasket made of Centellen® HD 3822


Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.600.00.1	12 / 15	16	1/2	3/4	7.9	3.3	30	50	10		19.48
620.601.00.1	15	20	1/2	3/4	8.5	3.9	30	50	10		23.89
620.602.00.1	20	25	3/4	1	9.2	4.4	38	25	5		30.57
620.603.00.1	25	32	1	1 1/4	9.4	4.1	46	25	5		46.15
620.613.00.1	25 / 32	32	1 1/4	1 1/4	10.6	5.1	46	25	5		46.15
620.604.00.1	32	40	1 1/4	1 1/2	10.9	5.4	55	10		1	58.41
620.614.00.1	32	40	1 1/2	1 1/2	11.2	5.6	55	10		1	58.41
620.605.00.1	40	50	1 1/2	1 1/2	13.8	5.9	55	10		1	111.24
620.615.00.1	40 / 50	50	2	2	14.9	6.6	67	10		1	111.24
620.606.00.1	50	63	2	2 3/4	13.3	4.3	89	5		1	161.32

Available as of April 2023



New

Geberit FlowFit adaptor with union nut



Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of Centellen® HD 3822

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, \varnothing [mm]	G ["]	d _i , \varnothing [mm]	L [cm]	l [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.620.00.1	12	16	3/8	9	6.2	5.5	2.2	20	25	5		13.91
620.630.00.1	12 / 15	16	1/2	11	6.4	5.7	2.4	24	25	5		13.91
620.640.00.1	12 / 20	16	3/4	17	5.9	5.2	1.9	30	50	10		13.91
620.650.00.1	12 / 25	16	1	21	6.2	5.4	2.1	38	50	10		13.91
620.621.00.1	15 / 12	20	3/8	9	6.2	5.5	2.2	20	10		1	16.12
620.631.00.1	15	20	1/2	11	6.4	5.7	2.4	24	50	10		16.12
620.641.00.1	15 / 20	20	3/4	16	6.5	5.8	2.5	30	25	5		16.12
620.651.00.1	15 / 25	20	1	21	6.3	5.5	2.2	38	50	10		16.12
620.672.00.1	15 / 30	20	1 1/8	23	6.4	5.5	2.2	41	10		1	17.21
620.661.00.1	15 / 32	20	1 1/4	27	6.6	5.6	2.3	46	50	10		17.21
620.671.00.1	15 / 40	20	1 1/2	32	6.2	5	1.7	55	50	10		17.21
620.622.00.1	20 / 15	25	1/2	11	6.4	5.7	2.4	24	25	5		20.31
620.632.00.1	20	25	3/4	15	6.5	5.8	2.5	30	25	5		20.31
620.642.00.1	20 / 25	25	1	20	7.3	6.3	3	38	25	5		20.31
620.652.00.1	20 / 32	25	1 1/4	27	6.8	5.8	2.5	46	25	5		21.72
620.662.00.1	20 / 40	25	1 1/2	32	7.1	5.9	2.6	55	25	5		21.72
620.673.00.1	20 / 50	25	2	42	6.3	5	1.7	67	10		1	33.36
620.623.00.1	25 / 20	32	3/4	16	7	6.3	2.7	30	25	5		28.94
620.633.00.1	25	32	1	20	7.8	6.8	3.2	38	25	5		28.94
620.643.00.1	25 / 32	32	1 1/4	27	7.4	6.4	2.8	46	25	5		33.36
620.653.00.1	25 / 40	32	1 1/2	32	7.6	6.4	2.8	55	25	5		33.36
620.663.00.1	25 / 50	32	2	42	7.5	6.2	2.6	67	10		1	44.48
620.624.00.1	32	40	1 1/4	27	7.9	6.9	3.3	46	10	2		42.24
620.634.00.1	32	40	1 1/2	33	8	6.9	3.3	55	25	5		42.24
620.644.00.1	32 / 50	40	2	42	7.8	6.5	2.9	67	10	2		53.38
620.654.00.1	32 / 65	40	2 1/4	42	7.7	6.3	2.7	74	5		1	53.38
620.625.00.1	40	50	1 1/2	33	10.6	9.5	3.6	55	10	2		59.52
620.635.00.1	40	50	1 3/4	33	11.5	10.2	4.3	62	10	2		59.52
620.645.00.1	40 / 50	50	2	42	11	9.9	3.9	67	10	2		70.66
620.655.00.1	40 / 50	50	2 1/4	42	10.8	9.4	3.5	74	10		1	70.66
620.665.00.1	40 / 50	50	2 3/8	52	10.9	9.4	3.5	78	10		1	70.66
620.675.00.1	40 / 65	50	2 3/4	62	10.7	9.1	3.2	89	10		1	70.66
620.626.00.1	50 / 50	63	2	42	11.5	10.4	4	67	10	2		93.42
620.636.00.1	50 / 50	63	2 3/8	52	11.6	10.5	4.1	78	5		1	93.42
620.646.00.1	50 / 65	63	2 1/2	54	11.8	10.2	3.9	83	5		1	93.42
620.656.00.1	50 / 65	63	2 3/4	62	11.5	9.9	3.6	89	5		1	93.42

Available as of April 2023

New

Geberit FlowFit 90° bend adaptor with union nut



Application purposes

- Suitable exclusively for threads with an inner diameter of ≤ di, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of Centellen® HD 3822

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	G ["]	di, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.685.00.1	12	16	3/8	9	5.4	3.7	3.6	3.1	22	25	5	17.89
620.686.00.1	12 / 15	16	1/2	11	5.6	4	3.6	3.3	24	25	5	17.89
620.688.00.1	15	20	1/2	11	5.6	4.2	3.5	3.5	24	50	10	20.84
620.689.00.1	15 / 20	20	3/4	16	5.8	3.2	3.5	3.6	30	50	10	20.84
620.693.00.1	20	25	3/4	15	5.9	4.5	3.5	3.8	30	25	5	26.27
620.694.00.1	20 / 25	25	1	20	6.3	5.2	3.5	4.3	38	25	5	26.27

Available as of April 2023

New

Geberit FlowFit adaptor union with clamping ring



Application purposes

- For copper pipes, rough, nickel-plated or chrome-plated
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Scope of delivery


- Clamping ring union

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	l [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.680.00.1	12 / 10	16	12	5.8	1.7	0.8	25	5	1	15.02
620.683.00.1	12 / 10	16	14	5.8	1.7	0.8		5	1	18.93
620.690.00.1	12	16	15	5.8	1.6	0.9	25	5	1	15.02
620.691.00.1	12	16	16	5.8	1.6	0.9		5	1	18.93
620.681.00.1	15 / 12	20	15	6	1.6	1.1	25	5	1	17.21
620.684.00.1	15	20	18	6	1.6	1.1	25	5	1	21.72

Available as of April 2023

New

Geberit FlowFit elbow adaptor 90° with clamping ring union



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery


- Clamping ring union

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	I [cm]	Z [cm]	Z1 [cm]	SW [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.700.00.1	12 / 10	16	12	5.5	0.8	2.2	1.7	24	25	1	18.93
620.710.00.1	12	16	15	5.5	0.8	2.2	1.7	24	25	1	18.93
620.701.00.1	15 / 12	20	15	5.7	0.8	2.4	1.7	24	25	1	21.72

Available as of April 2023

New

Geberit FlowFit adaptor to copper pipe clamping ring union



Application purposes

- For technical building systems, industry and shipbuilding
- Suitable exclusively for clamping ring unions
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	CuZn21Si3P / Cu
------------------	-----------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.720.00.1	12	16	15	7	3.7	25	5	1	16.69
620.721.00.1	15 / 12	20	15	7	3.7	25	5	1	18.93
620.722.00.1	20	25	22	7.4	4.1	25	5	1	23.37


Available as of April 2023



- Suitable exclusively for clamping ring unions

New

Geberit FlowFit adaptor with screw connection to PEX pipes

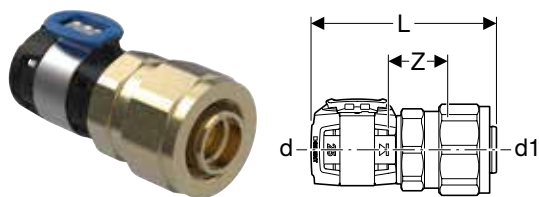

Application purposes

- For technical building systems
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery


- Clamping ring union

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	s1 [mm]	L [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.730.00.1	12	16	3/4	16	1.5	7.8	3.1	6	25	5	1	19.48
620.731.00.1	15	20	3/4	20	1.9	7.8	3.1	6	25	5	1	22.24
620.732.00.1	20	25	1	25	2.3	8	3.3	6	25	5	1	25.05

Available as of April 2023

New

Geberit FlowFit flange PN6, with pressing unit

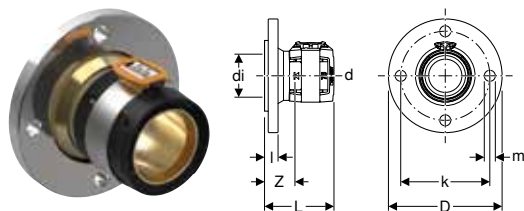

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flange, zinc-plated

Scope of delivery


- Geberit flange gasket PN 6: Centellen® HD WS 3822, DN=65, s=2mm (91047)

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	Z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
619.616.00.1	65	75	70	16	130	14	11.3	2.4	5	4	6	1	166.86

Available as of April 2023

New

Geberit FlowFit flange PN10/16, with pressing unit

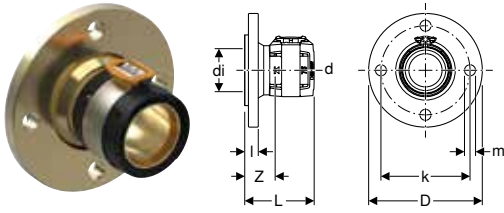

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flange made of brass CW617N

Scope of delivery

- Geberit flange gasket PN 10/16: Centellen® HD WS 3822, DN=65, s=2mm (91037)


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	k [mm]	m [mm]	L [cm]	l [cm]	z [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
619.617.00.1	65	75	70	18.5	145	18	11.3	2.4	5	4	10 / 16	1	166.86

Available as of April 2023

Catches

New

Geberit FlowFit pipe end plug

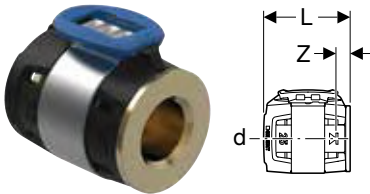

Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap


Art. no.	DN	d, ø [mm]	L [cm]	z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.740.00.1	12	16	3.9	0.6	50	10	4.71
620.741.00.1	15	20	3.9	0.6	50	10	5.30
620.742.00.1	20	25	3.9	0.6	50	10	5.82

Available as of April 2023

Outlet mounting boxes

New

Geberit FlowFit tap connector box 90° with MasterFix

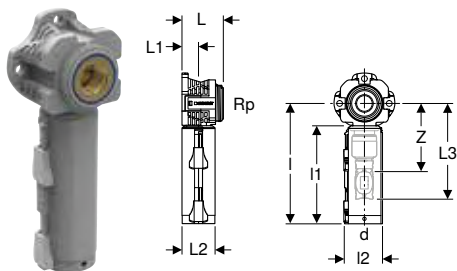

Application purposes

- For Geberit system pipes, PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Scope of delivery

- Geberit FlowFit adaptor with MasterFix

Characteristics


- Pressing indicator
- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Three fastening points
- Elbow connector made of gunmetal
- Adaptor with Masterfix, made of PPSU
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	I [cm]	I1 [cm]	I2 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.681.00.3	12 / 15	16	1/2	5	2	4	11.6	14.6	11.8	4.6	8.2		5	1	21.22
651.681.00.3	15	20	1/2	5	2	4	11.6	14.6	11.8	4.6	8.2		5	1	22.24
652.682.00.3	15 / 20	20	3/4	5	2	4	11.6	14.6	11.8	4.6	8.2	5		1	46.22

Available as of April 2023

New

Geberit tap connector box 90° for MasterFix

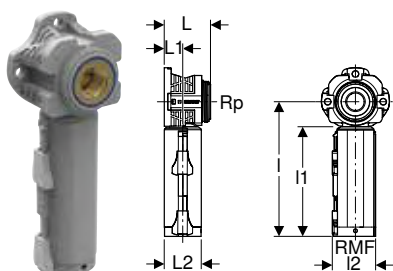

Application purposes

- For Geberit system pipes, PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Male thread MF 1/2", compatible with MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Art. no.	DN	RMF ["]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	I2 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.687.00.3	15	1/2	1/2	5	2	4	14.6	11.8	4.6	40	5	1	13.72
650.688.00.3	15 / 20	1/2	3/4	5	2	4	14.6	11.8	4.6			1	16.74


Available as of April 2023

To order additionally

- Geberit FlowFit adaptor with MasterFix → p. 280

New

Geberit FlowFit double tap connector box 90° with MasterFix

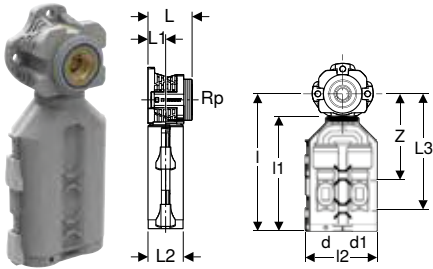

Application purposes

- For Geberit system pipes, PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Scope of delivery

- 2 Geberit FlowFit adaptor with MasterFix

Characteristics


- Pressing indicator
- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Three fastening points
- Elbow connector made of gunmetal
- Adaptor with Masterfix, made of PPSU
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	l [cm]	l1 [cm]	l2 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.683.00.3	12 / 15 / 12	16	1/2	16	5	2	4	13.4	16.5	13.8	8.6	10.1		5	1	47.88
652.685.00.3	15 / 15 / 12	20	1/2	16	5	2	4	13.4	16.5	13.8	8.6	10.1			1	48.80

Available as of April 2023

New

Geberit double tap connector box 90° for MasterFix

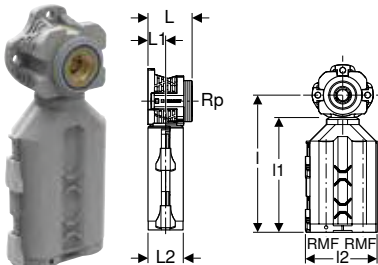

Application purposes

- For Geberit system pipes, PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Male thread MF 1/2", compatible with MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Art. no.	DN	RMF ["]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	l [cm]	l1 [cm]	l2 [cm]	SU1 [pc.]	GBP/pc.
650.689.00.3	15	1/2	1/2	5	2	4	16.5	13.8	8.6	1	38.02


Available as of April 2023

To order additionally

- Geberit FlowFit adaptor with MasterFix → p. 280

New

Geberit FlowFit tap connector box 90° with MasterFix, premounted

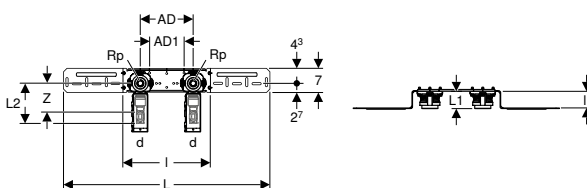

Application purposes

- For Geberit system pipes, PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Scope of delivery

- 2 Geberit FlowFit adaptor with MasterFix
- 2 connector box necks
- 2 protection plugs
- Fastening material

Characteristics

- Pressing indicator
- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Elbow connector made of gunmetal
- Adaptor with Masterfix, made of PPSU
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Art. no.	DN	d, ø [mm]	Rp [""]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.791.00.3	12 / 15	16	1/2	15.3	10	59.7	5	11.6	25.7	4.8	8.2		5	1	55.98
651.791.00.3	15	20	1/2	15.3	10	59.7	5	11.6	25.7	4.8	8.2	90	5	1	58.14


Available as of April 2023

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

New

Geberit tap connector box 90° for MasterFix, premounted

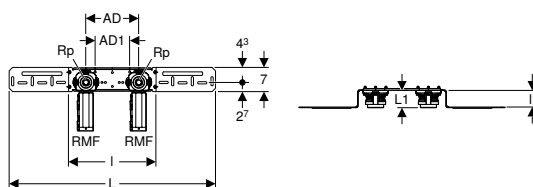

Application purposes

- For Geberit system pipes, PB, with protective tube
- For potable water
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Sound-absorbing
- Cannot be pulled out over connector box head
- Connector box head with male thread for protection cover, round
- Male thread MF 1/2", compatible with MeplaFix
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 connector box necks
- 2 protection plugs
- Fastening material

Art. no.	DN	RMF [""]	Rp [""]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	I [cm]	I1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
650.792.00.3	15	1/2	1/2	15.3	10	59.7	5	25.7	4.8	5	1	42.60

Available as of April 2023

To order additionally

- Geberit FlowFit adaptor with MasterFix → p. 280


Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Connectors

New

Geberit FlowFit connection bend 90°

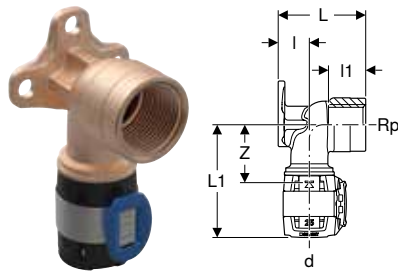

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Three fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 3.6 cm										
620.750.00.1	12	16	3/8	6	1.9	1.3	2.7	25	5	11.39
620.760.00.1	12	16	1/2	6	1.9	1.3	2.8	50	10	11.39
620.751.00.1	15	20	3/8	6	1.9	1.3	2.7	25	5	11.98
620.761.00.1	15	20	1/2	6.3	1.9	1.3	3.1	40	10	11.98
L / length: 5.2 cm										
620.800.00.1	12	16	3/8	6	1.9	1.5	2.7	25	5	12.50
620.810.00.1	12	16	1/2	6	1.9	1.5	2.7	40	10	12.50
620.801.00.1	15	20	3/8	6	1.9	1.5	2.7	25	5	13.04
620.811.00.1	15	20	1/2	6	1.9	1.7	3.1	40	10	13.04
620.821.00.1	15	20	3/4	6.3	1.9	1.9	3	30	10	15.60
620.802.00.1	20	25	3/4	6.7	1.9	1.9	3.4	25	5	22.24
L / length: 7.8 cm										
620.770.00.1	12	16	1/2	6.8	1.9	3	3.5	30	10	17.21
620.771.00.1	15	20	1/2	7.3	1.9	3	4	30	10	21.13


Available as of April 2023

Accessories

- Geberit sound insulation set for single elbow tap connector 90° → p. 103

New

Geberit FlowFit double elbow tap connector 90°

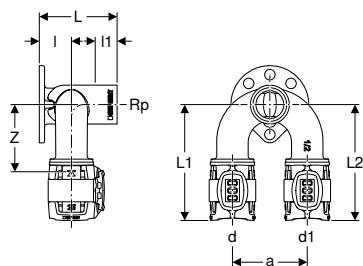

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Four fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	a [cm]	L1 [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 5.2 cm														
620.830.00.1	12 / 15 / 12	16	1/2	16	5	7.1	7.1	1.9	2.4	3.8	25	5		30.32
620.831.00.1	12 / 15 / 15	16	1/2	20	5	7.1	7.1	1.9	2.4	3.8	25	5		35.87
620.841.00.1	15 / 15 / 12	20	1/2	16	5	7.1	7.1	1.9	2.4	3.8	25	5		35.87
620.851.00.1	15	20	1/2	20	5	7.6	7.6	1.9	2.4	4.3	25	5		35.87
620.832.00.1	15 / 15 / 20	20	1/2	25	5	7.6	7.8	2.2	2.4	4.3	20	5	1	41.44
620.842.00.1	20 / 15 / 15	25	1/2	20	5	7.8	7.6	2.2	2.4	4.3	20	5	1	41.44
620.852.00.1	20 / 15 / 20	25	1/2	25	5	7.3	7.3	2.2	2.4	4.3	20	5		41.44

Available as of April 2023


Accessories

- Geberit sound insulation set for double elbow tap connector 90° → p. 224



New

Geberit FlowFit T-elbow tap connector 90°, offset

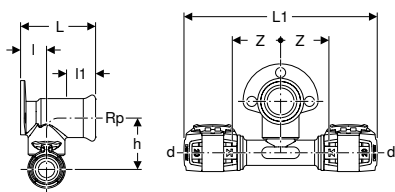

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Offset
- Three fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	L1 [cm]	l [cm]	l1 [cm]	h [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 3.6 cm												
620.951.00.1	15	20	1/2	20	13.4	1.8	1.5	3.6	3.4	20	10	20.59
L / length: 5.2 cm												
620.981.00.1	15	20	1/2	20	13.4	1.8	2.9	3.6	3.4	20	10	20.59


Available as of April 2023

Accessories

- Geberit sound insulation base for tap connector, straight → p. 224

New

Geberit FlowFit corner elbow connector 90°

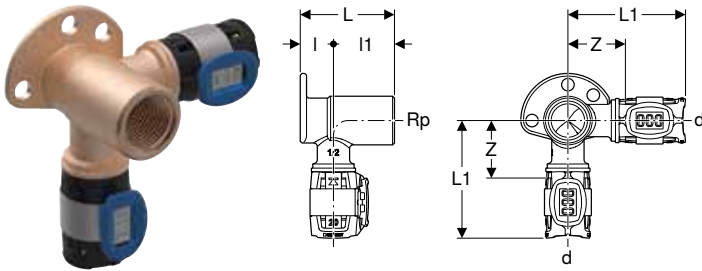

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Three fastening points
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug


Art. no.	DN	d, ø [mm]	Rp ["]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 3.6 cm										
620.881.00.1	15	20	1/2	6.6	1.9	1.8	3.3	20	10	20.59
L / length: 5.2 cm										
620.921.00.1	15	20	1/2	6.6	1.9	3.4	3.3	20	10	20.59

Available as of April 2023

Accessories

- Geberit sound insulation base for tap connector, straight → p. 224

Geberit elbow tap connector 90° with male thread MF 1/2"

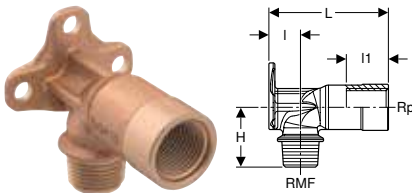

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	l [cm]	l1 [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 5.7 cm										
602.285.00.1	15	1/2	1/2	1.8	2.6	3.5	2500	50	10	13.27
L / length: 7.3 cm										
602.287.00.2	15	1/2	1/2	1.8	3	3.5		50	10	16.20

Accessories

- Geberit sound insulation set for single elbow tap connector 90° → p. 103

Geberit elbow tap connector 90° set with male thread MF 1/2"

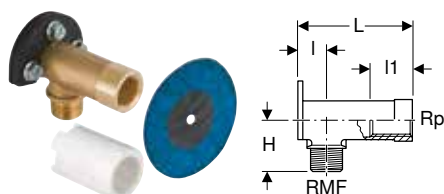

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics


- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery

- Elbow tap connector 90°
- Insulating sleeve
- Sound insulation base
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	RMF ["]	Rp ["]	l [cm]	l1 [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 7.3 cm										
465.034.00.2	15	1/2	1/2	1.8	3	3.5	50	10	1	25.37

Geberit tap connector, straight, with male thread MF 1/2"

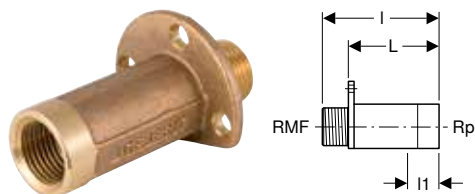

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Volex

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	l [cm]	l1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 5.7 cm									
602.283.00.1	15	1/2	1/2	7.9	2.7	50	10	1	17.57

Accessories

- Geberit sound insulation base for tap connector, straight → p. 224

Geberit set of tap connector, straight, with male thread MF 1/2", premounted, drywall construction

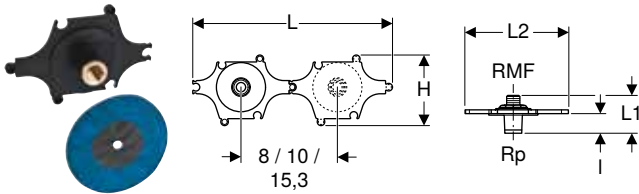

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Scope of delivery

- Tap connector, straight
- Insulating sleeve
- Drilling template
- Sealing washer
- Fastening material

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Art. no.	DN	RMF ["]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	l [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
602.295.00.1	15	1/2	1/2	31.6	6	16.5	3.1	11	20	2	28.46

Accessories

- Geberit mounting aid set for straight connector, for drywall construction → p. 230

New

Geberit FlowFit set of connection bend 90°, double

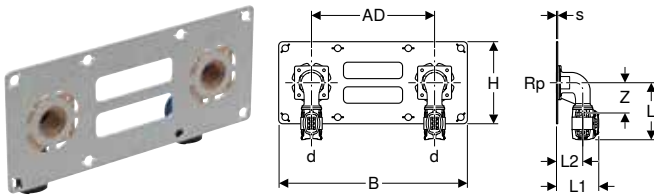

Application purposes

- For technical building systems
- For drywall construction
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Scope of delivery

- 2 elbow tap connectors 90°
- Mounting plate
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	s [mm]	L [cm]	L1 [cm]	L2 [cm]	B [cm]	H [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.620.00.1	12	16	1/2	15	1.5	6.6	4.7	3	23	10	3.5	5	1	58.41
619.621.00.1	15	20	1/2	15	1.5	6.8	5.2	3.2	23	10	3.7	5	1	69.53

Available as of April 2023

Geberit T-elbow tap connector 90° set, straight, with male thread MF 1/2"

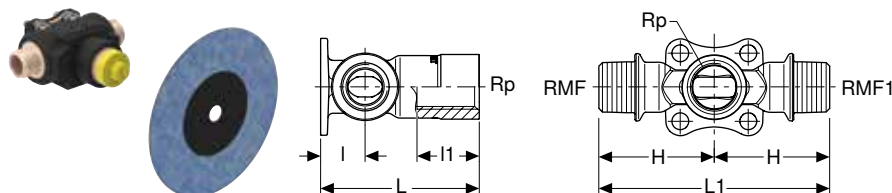

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
Material, insulation	EPP
Insulation thickness	6.5 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Four fastening points
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa


Scope of delivery

- Thermal insulation
- Sound insulation base
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	RMF ["]	Rp ["]	RMF1 ["]	L1 [cm]	l [cm]	l1 [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
L / length: 7.3 cm													
602.260.00.1	PO	15	1/2	1/2	1/2	9.6	1.9	3	4.8	10	2	1	60.81

PO: Phase out as of April 2023

Geberit T-elbow tap connector 90° set, offset, with male thread MF 1/2"

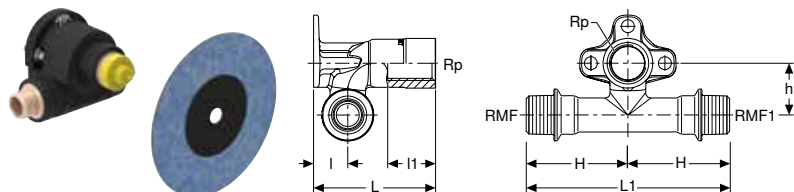

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
Material, insulation	EPP
Insulation thickness	4 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery



- Thermal insulation
- Sound insulation base
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	RMF ["]	Rp ["]	RMF1 ["]	L1 [cm]	l [cm]	l1 [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
L / length: 7.3 cm														
602.265.00.1	PO	15	1/2	1/2	1/2	11	1.9	3	5.5	2.8	10	2	1	60.81

PO: Phase out as of April 2023

New

Geberit FlowFit connection bend 90°, premounted, single, offset, insulated



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Scope of delivery

- Protection plug
- Fastening material

Characteristics



- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.630.00.1	12	16	1/2	45	5.2	6	10	4	2.7	140	5	1	26.45
619.631.00.1	15	20	1/2	45	5.2	6	10	4	2.8	140	5	1	30.32

Available as of April 2023

New

Geberit FlowFit connection bend 90°, premounted, double, offset, insulated



Application purposes

- For potable water
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Scope of delivery

- Fastening material
- 2 protection plugs

Characteristics

- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.639.00.1	12	16	1/2	10	12	59.7	5.2	6	25.3	4	2.8	140	5	1	38.93
619.640.00.1	12	16	1/2	15.3	7.3	59.7	5.2	6	25.3	4	2.7	140	5	1	38.93
619.641.00.1	15	20	1/2	10	12	59.7	5.2	6	25.3	4	2.8	140	5	1	42.85
619.651.00.1	15	20	1/2	15.3	7.3	59.7	5.2	6	25.3	4	2.8	140	5	1	42.85



Available as of April 2023

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

New

Geberit FlowFit connection bend 90°, premounted, double, offset

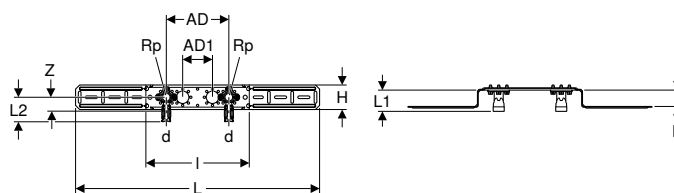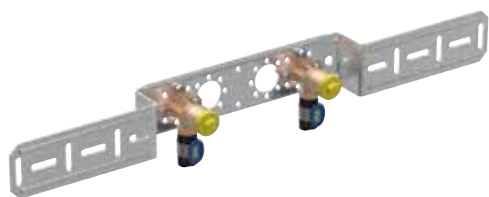

Application purposes

- For potable water
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.660.00.1	12	16	1/2	15.3	7.3	59.7	5.2	6	25.7	4	6	2.7	140	5	1	36.51
619.661.00.1	15	20	1/2	15.3	7.3	59.7	5.2	6	25.7	4	6	2.7	140	5	1	40.04



Available as of April 2023

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

New

Geberit FlowFit connection bend 90°, premounted, double, straight

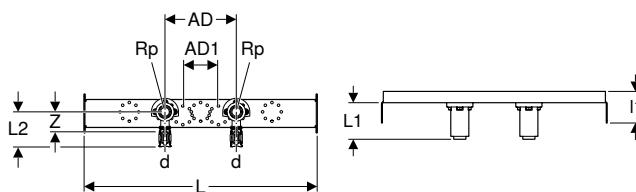

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- For Geberit Duofix elements for washbasins
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 sealing washers
- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.670.00.1	12	16	1/2	15.3	7.7	50	7.8	7.3	7	4		5	1	44.14
619.671.00.1	15	20	1/2	15.3	7.7	50	7.8	7.3	7	4	120	5	1	48.40


Available as of April 2023

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

New

Geberit FlowFit connection bend 90°, premounted, double, offset, with drain pipe bracket and connection bend

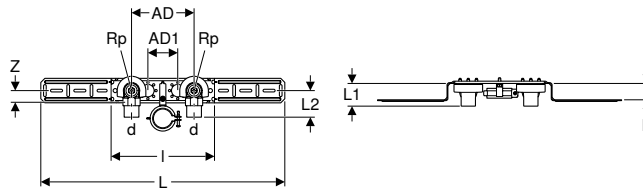

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Sound-absorbing
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery



- Pipe bracket for outlet bend
- 2 protection plugs
- Fastening material
- Connection bend 90° made of PE-HD, ø 50 mm

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.680.00.1	12	16	1/2	15.3	7.3	59.7	5.2	6	25.3	4	2.8	60	5	1	51.66
619.681.00.1	15	20	1/2	15.3	7.3	59.7	5.2	6	25.3	4	2.8	60	5	1	56.73

Available as of April 2023

New

Geberit FlowFit connection bend 90°, premounted, double, angled

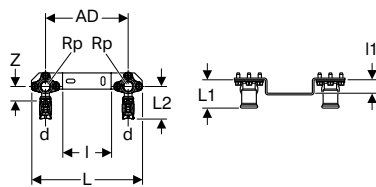

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------


Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Pressing socket with yellow protection plug
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.690.00.1	12	16	1/2	15.3	20.5	3.6	6	9	2.8	2.8	10	1	33.36

Available as of April 2023

Geberit elbow tap connector 90° with male thread MF 1/2", premounted, single, short

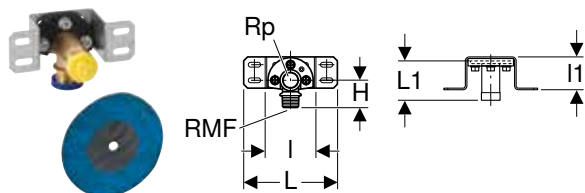

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery


- Sealing washer
- Protection plug
- Fastening material

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

New

Geberit FlowFit connector T-piece for concealed cistern

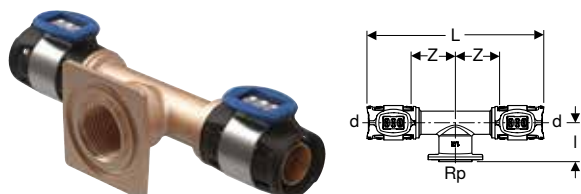

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Fastening flange for Sigma concealed cisterns 8 cm
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	l [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.990.00.1	12 / 15 / 12	16	1/2	13.4	2.8	3.4	50	10	21.74
620.991.00.1	15	20	1/2	13.4	2.8	3.4	50	10	21.74

Available as of April 2023

New

Geberit FlowFit elbow tap connector 90° for concealed cistern



Application purposes

- For technical building systems
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Fastening flange for Sigma concealed cisterns 8 cm
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.790.00.1	12	16	1/2	6.8	2.8	3.5	25	5	18.93
620.791.00.1	15	20	1/2	7	3.1	3.7	25	5	18.93

Available as of April 2023

New

Geberit FlowFit elbow tap connector 90° for concealed cistern



Application purposes

- For technical building systems, industry and shipbuilding
- For concealed cisterns from third-party manufacturers
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Fastening flange for Twinline concealed cisterns 8 cm
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Scope of delivery


- Knurled nut M35 x 1.5

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.890.00.1	12	16	1/2	6.8	3.8	2.8	3.5	50	10	25.32
620.891.00.1	15	20	1/2	6.8	3.8	2.8	3.5	50	10	25.32

Available as of April 2023

New

Geberit FlowFit bend wall feed-through 90°

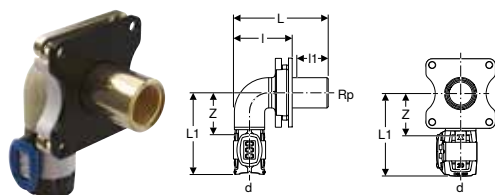

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Scope of delivery


- Sound insulation base
- Distance element

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	GBP/pc.
620.803.00.1	12 / 15	16	1/2	7.6	6.7	5.1 / 4.6 / 4.1	2.5	3.4	50	33.34
620.804.00.1	15	20	1/2	7.6	6.7	5.1 / 4.6 / 4.1	2.5	3.4	40	36.33

Available as of April 2023

New

Geberit FlowFit T-wall feed-through 90°

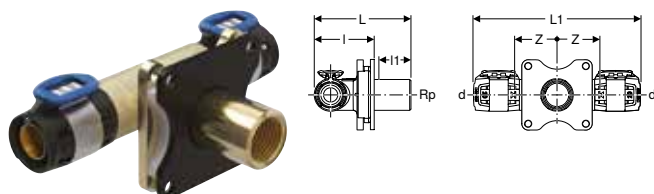

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Scope of delivery


- Sound insulation base
- Distance element

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	GBP/pc.
620.812.00.1	12 / 15 / 12	16	1/2	7.6	13.3	5.1 / 4.6 / 4.1	2.5	3.4	20	44.82
620.813.00.1	15	20	1/2	7.6	13.3	5.1 / 4.6 / 4.1	2.5	3.4	20	49.42

Available as of April 2023

New

Geberit FlowFit corner wall feed-through 90°

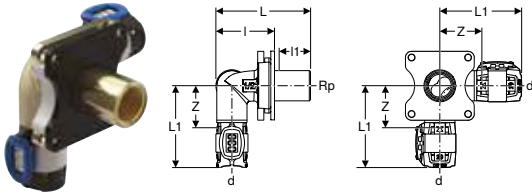

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Thread with transparent protection plug

Scope of delivery

- Sound insulation base
- Distance element


Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	GBP/pc.
620.822.00.1	12 / 15 / 12	16	1/2	7.6	6.7	5.1 / 4.6 / 4.1	2.5	3.4	20	56.55
620.823.00.1	15	20	1/2	7.6	6.7	5.1 / 4.6 / 4.1	2.5	3.4	20	60.92

Available as of April 2023

Manifolds with threaded connection

New

Geberit manifold with threaded connection and connection nipple for manifold, for MasterFix

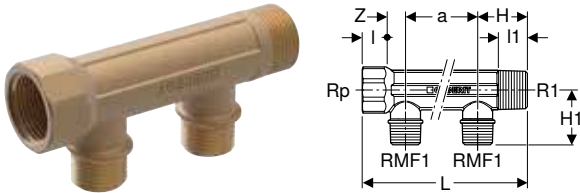

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	DR-Brass CC770S
------------------	-----------------

Characteristics

- Connection nipple for manifold with male thread MF 1/2", compatible with MeplaFix

Art. no.	DN	Rp ["]	RMF1 ["]	R1 ["]	a [cm]	L [cm]	l [cm]	l1 [cm]	H [cm]	H1 [cm]	Z [cm]	Number of outlets	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.428.00.1	20 / 15 / 20	3/4	1/2	3/4	5	11.5	1.2	1.4	3.5	3.8	1.8	2	25	5	1	23.58
653.429.00.1	20 / 15 / 20	3/4	1/2	3/4	5	16.5	1.2	1.4	3.5	3.8	1.8	3	25	5	1	29.96


Available as of April 2023

Accessories

- Geberit FlowFit adaptor with MasterFix → p. 280

New

Geberit FlowFit adaptor with MasterFix



Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- MasterFix with blue protective cap

Technical data


Product material	PPSU
------------------	------

Art. no.	DN	d, ø [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
620.290.00.1	12 / 15	16	1/2	7.6	2.8	40	10	8.38
620.291.00.1	15	20	1/2	7.6	2.8	40	10	10.58

Available as of April 2023

New

Geberit stepped bend with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Male thread

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	R ["]	A [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.478.00.1	20	3/4	2	6.6	30	25	5	1	36.19

Available as of April 2023

New

Geberit cap with MasterFix



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent closing of male threads RMF 1/2"
- Application overview – Geberit FlowFit → p. 263


Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	RpMF ["]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.420.00.1	15	1/2	3.2	50	5	1	5.66

Available as of April 2023

Geberit manifold with threaded connection and connection nipple for manifold, for Euro cone



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337

Characteristics

- Connection nipple for manifold, with Euro cone G 3/4"


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)														
Art. no.	DN	R	G	Rp1	a	L	I	I1	H	H1	Z	Number of outlets	SU2	SU1	GBP/pc.
		["]	["]	["]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]		[pc.]	[pc.]	
602.422.00.1	20 / 15 / 20	3/4	3/4	3/4	5	10.9	1.5	1.5	3.2	3.2	1.3	2	5	1	44.29
602.423.00.1	20 / 15 / 20	3/4	3/4	3/4	5	16	1.5	1.5	3.2	3.2	1.3	3	5	1	59.92



- Fastening with Geberit pipe bracket, insulated (art. no. 601.853.26.1)

Geberit cap with female thread




Application purposes

- For technical building systems, industry and shipbuilding
- For permanently closing Geberit manifolds with threaded connection
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)									
Art. no.	DN	Rp	L	I	SW	SU3	SU2	GBP/pc.		
		["]	[cm]	[cm]	[mm]	[pc.]	[pc.]			
602.482.00.1	20	3/4	2.1	1.5	34	25	5	7.50		

Geberit plug with male thread



Application purposes


- For technical building systems, industry and shipbuilding
- For permanently closing Geberit manifolds with threaded connection
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)						
Art. no.	DN	R	I	H	SW	SU2	GBP/pc.
		["]	[cm]	[cm]	[mm]	[pc.]	
602.480.00.1	20	3/4	1.5	2.6	27	5	8.09

New

Geberit FlowFit connection nipple for manifold, for Euro cone



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.330.00.1	12 / 20	16	3/4	6.1	2.6	27	50	10	1	12.27
620.331.00.1	15 / 20	20	3/4	6.5	3.1	27	50	10	1	14.45

Available as of April 2023


Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

T-pieces for heating

New

Geberit FlowFit T-piece crossing with insulation box

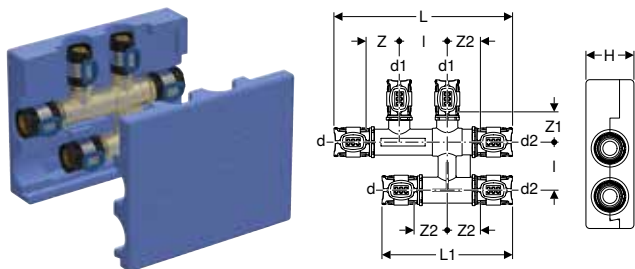

Application purposes

- For connecting to two parallel pipes without intersecting
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.300.00.1	12	16	16	16	18.6	13.6	5	5	3.5	3.5	3.5	10	1	47.26
619.311.00.1	15 / 12 / 12	20	16	16	18.6	13.6	5	5	3	3	3.4	10	1	49.51
619.321.00.1	15 / 12 / 15	20	16	20	18.6	13.6	5	5	3	3	3.4	10	1	49.51
619.331.00.1	15	20	20	20	18.6	13.6	5	5	3	3	3.4	10	1	49.51
619.302.00.1	20 / 12 / 15	25	16	20	18.6	13.6	5	5	3.3	3	3.3	10	1	55.06
619.312.00.1	20 / 12 / 20	25	16	25	18.6	13.6	5	5	3.3	3	3.3	10	1	55.06
619.322.00.1	20 / 15 / 20	25	20	25	18.6	13.6	5	5	3.5	3.5	3.5	10	1	55.06


Available as of April 2023



Adaptors and connections for heating, detachable

New

Geberit FlowFit adaptor with screw connection to PEX pipes

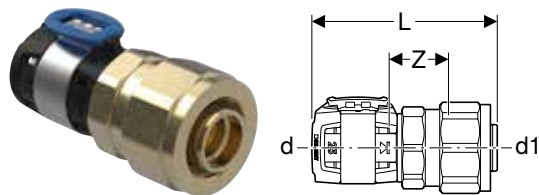

Application purposes

- For technical building systems
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Clamping ring union



Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	s1 [mm]	L [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
620.730.00.1	12	16	3/4	16	1.5	7.8	3.1	6	25	5	1	19.48
620.731.00.1	15	20	3/4	20	1.9	7.8	3.1	6	25	5	1	22.24
620.732.00.1	20	25	1	25	2.3	8	3.3	6	25	5	1	25.05

Available as of April 2023

Connections for heating

New

Geberit connector box type T

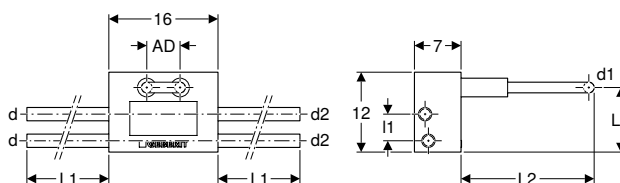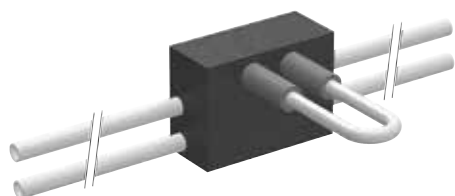

Application purposes

- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	PE-RT II / AI / PE-RT II
Material, insulation	PUR
Insulation thickness	6 mm
Thermal conductivity, insulation	0.03 W/(m·K)

Characteristics


- System pipe forms a barrier against diffusion
- System pipe, silver grey RAL 7001 exterior
- For pressure test without radiator

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	AD [cm]	L1 [cm]	L2 [cm]	L3 [cm]	l1 [cm]	SU2 [pc.]	GBP/pc.
619.371.00.1	15 / 12 / 15	20	16	20	5	30	20	8	4.2	10	126.28

Available as of April 2023

New

Geberit FlowFit metal pipe connector bend 90°

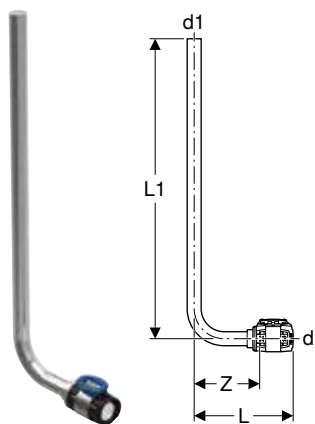

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- Copper connection pipe
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Metal pipe connector bend 90°


Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.380.22.1	12	16	14	12.8	30	9.5	20	2	14.77
619.391.22.1	15 / 12	20	14	12.8	30	9.4	20	2	15.60

Available as of April 2023



New

Geberit FlowFit metal pipe connector bend 90° with adaptor with union nut for Euro cone

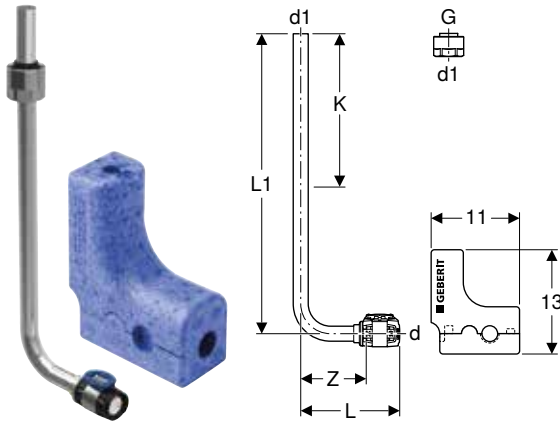

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- Copper connection pipe
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Scope of delivery

- Metal pipe connector bend 90°
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	L [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 30 cm										
619.400.22.1	12 / 20	16	3/4	15	12.8	9.5	17	20	2	17.80
619.401.22.1	15 / 20	20	3/4	15	12.7	9.4	17	20	2	19.48
L1 / length: 100 cm										
619.410.22.1	12 / 20	16	3/4	15	12.8	9.5	87	20	2	33.36
619.411.22.1	15 / 20	20	3/4	15	12.7	9.4	87	20	2	35.62


Available as of April 2023



- Tighten the union as far as it will go

New

Geberit FlowFit metal pipe connector T-piece with union connector for Euro cone

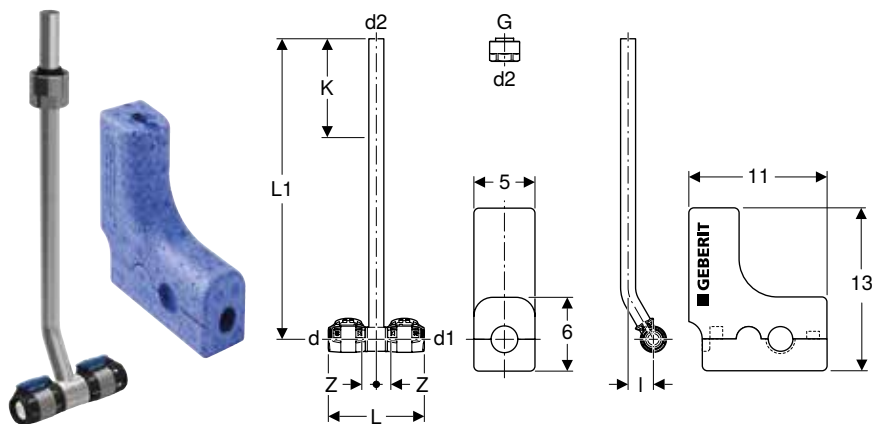

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics

- Leaky if unpressed
- Nickel-plated
- Copper connection pipe
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Two-piece insulation box

Scope of delivery

- Metal pipe connection T-piece
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.420.22.1	12 / 20 / 12	16	3/4	16	15	9	30	2.5	1.3	17	20	2	22.24
619.421.22.1	15 / 20 / 15	20	3/4	20	15	9	30	2.5	1.3	17	20	2	23.89

Available as of April 2023




- Tighten the union as far as it will go



New

Geberit FlowFit set of connector T-pieces for inlet and return flow, with union connector for Euro cone

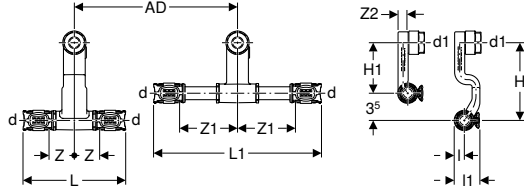

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Installation completely in front of the wall

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Scope of delivery

- 2 union connectors for Euro cone G 3/4"
- Connector T-piece with long connection
- Connector T-piece with short connection

Art. no.	DN	d, Ø	d1, Ø	AD	L	L1	I	I1	H	H1	Z	Z1	Z2	SU3	SU1	GBP/pc.
		[mm]	[mm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[pc.]	[pc.]	
619.440.22.1	P 12	16	15	5	12.8	17	1.1	2.4	10	6.5	3.1	7.3	1.3	10	1	45.14
619.440.22.2		12	16	15	5	12.8	21.2	1.1	2.4	10	6.5	3.1	7.3	10	1	44.48
619.441.22.1	P 15 / 12 / 15	20	15	5	12.8	17	1.3	2.4	10	6.5	3.1	7.3	1.3	10	1	47.47
619.441.22.2		15 / 12 / 15	20	15	5	12.8	21.2	1.3	2.4	10	6.5	3.1	7.3	10	1	46.77


N: New, available : 619.440.22.1 as of January 2023; 619.441.22.1 as of January 2023; P: Phase out



- Tighten the union as far as it will go
- Replaced by art. no. 619.440.22.2, 619.441.22.2
- Replacement for art. no. 619.440.22.1, 619.441.22.1

New

Geberit FlowFit set of connector end pieces for inlet and return flow, with union connector for Euro cone

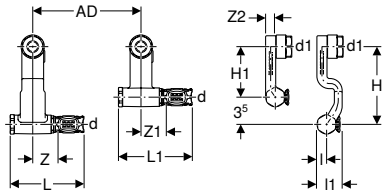

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Inlet and return flow exchangeable
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Installation completely in front of the wall

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Scope of delivery

- 2 union connectors for Euro cone G 3/4"
- Connector T-piece with long connection
- Connector T-piece with short connection


Art. no.	DN	d, Ø	d1, Ø	AD	L	L1	I	I1	H	H1	Z	Z1	Z2	Connection	SU1	GBP/pc.
		[mm]	[mm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]		[pc.]	
619.450.22.1	12	16	15	5	9.3	13.5	1.1	2.4	10	6.5	3.1	7.3	1.3	left	1	44.48
619.460.22.1	12	16	15	5	9.3	13.5	1.1	2.4	10	6.5	3.1	7.3	1.3	right	1	44.48

Available as of April 2023



- Tighten the union as far as it will go

Geberit metal pipe bend with plain ends 90° with union connector for Euro cone

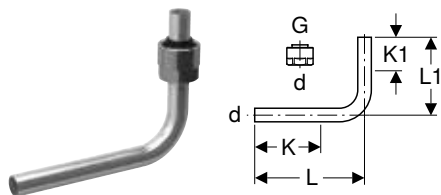

Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.601.22.3	12 / 20	15	3/4	13	10	7.5	4.5	20	2	7.39



- Tighten the union as far as it will go

Geberit metal pipe elbow 90°, lockable, with union connector for Euro cone

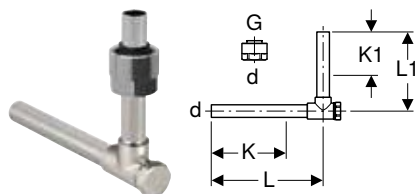

Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data

Product material	Brass / copper
------------------	----------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.603.22.3	12 / 20	15	3/4	12.5	10	8	5.5	50	10	2	24.07




- Tighten the union as far as it will go



New

Geberit FlowFit tap connector, straight, with union nut



Application purposes

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap
- Flat gasket made of Centellen® R WS 3825

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, \varnothing [mm]	G ["]	di, \varnothing [mm]	L [cm]	I [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.490.22.1	12	16	1/2	11	6.4	5.7	2.4	24	25	5	14.77
619.491.22.1	15	20	1/2	11.4	6.4	5.7	2.4	24	25	5	16.96
619.492.22.1	20	25	3/4	14.8	6.5	5.8	2.5	30	25	5	21.42


Available as of April 2023

Accessories

- Geberit FlowFit cover for pressing connection → p. 321

New

Geberit FlowFit set of union connectors with male thread



Application purposes

- For Geberit system pipes ML
- For connecting to radiator valves Herz with female thread G 1/2" in accordance with EN 215, construction dimension series D
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Clamping ring union
- Threaded nipple made of lead-free brass, nickel-plated
- Lead-free
- O-ring made of EPDM

Scope of delivery

- Set of 2 pieces

Technical data


Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, \varnothing [mm]	G ["]	SW [mm]	SU2 [pc.]	GBP/pc.
619.267.22.1	12	16	1/2	22	2	3.90

Available as of April 2023



- Tighten the union as far as it will go

New**Geberit FlowFit connector for Euro cone, with union nut****Application purposes**

- For connecting radiators and radiator valves
- Suitable exclusively for threads with an inner diameter of $\leq d_i$, see table
- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data


Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, \varnothing [mm]	G ["]	L [cm]	Z [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.260.22.1	12/20	16	3/4	6.1	1.8	27	10	2	1	10.89
619.261.22.1	15/20	20	3/4	6.5	2.3	27	10	2	1	13.09

Available as of April 2023

Accessories

- Geberit FlowFit cover for pressing connection → p. 321

New**Geberit FlowFit tap connector, straight with male thread****Application purposes**

- Exclusively suitable for heating and cooling
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Leaky if unpressed
- Nickel-plated
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------


Art. no.	DN	d, \varnothing [mm]	R ["]	L [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.471.22.1	15	20	1/2	6.4	3.1	22	25	5	9.81
619.481.22.1	15 / 20	20	3/4	6.5	3.2	27	25	5	9.81
619.472.22.1	20 / 15	25	1/2	6.4	3.1	22	25	5	12.27
619.482.22.1	20	25	3/4	6.8	3.5	27	25	5	12.27

Available as of April 2023

Accessories

Insulations for pipes and fittings

Geberit insulation hose



Application purposes

- For protecting pipes against the formation of condensation, heat loss and sound transmission

Characteristics

- Closed-cell insulation, red protective foil


Technical data

Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)

Art. no.	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
601.800.00.1	16	30	18	6	2	160	2	4.54
602.800.00.1	20	34	22	6	2	120	2	5.00
603.800.00.1	26	40	28	6	2	100	2	5.24

Insulations for connectors

Geberit sound insulation set for single elbow tap connector 90°

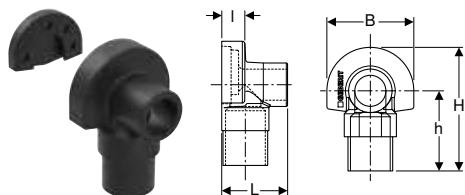

Application purposes

- For Geberit elbow tap connector with female thread Rp 1/2" and Rp 3/4"

Characteristics

- Black

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Product material	EPDM

Scope of delivery

- Sound insulation cap
- Sound insulation base

Art. no.	L [cm]	I [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.801.00.1	5.3	1.9	7	10	6.5	800	100	50	1	4.39

Accessories

- Geberit FlowFit connection bend 90° → p. 294

Geberit sound insulation base for tap connector, straight



Application purposes

- For Geberit tap connector, straight, with female thread Rp 1/2"

Characteristics


- Black

Technical data

Product material	EPDM
------------------	------

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.802.00.1	100	10	1.16

Geberit sound insulation set for double elbow tap connector 90°

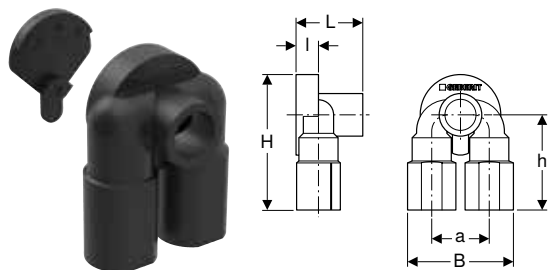

Application purposes

- For Geberit double elbow tap connector with female thread Rp 1/2"

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Product material	EPDM

Art. no.	a [cm]	L [cm]	l [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.805.00.1	5	5.3	2	9.2	11.6	8.1	50	10	1	15.71

Characteristics


- Black

Scope of delivery

- Sound insulation cap
- Sound insulation base

Caulks for pipes and fittings

Geberit sealing tape



Application purposes

- For protecting the pipe cross-sections of Geberit FlowFit against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Mapress system pipes and fittings against external corrosion factors

Technical data

Installation temperature	-10 – +50 °C
Temperature resistance	-60 – +100 °C
Product material	IIR

Art. no.	s [mm]	L [m]	B [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	12.5	3	6	1	45.96
601.815.00.1	1	12.5	5	5	1	76.56

Characteristics

- UV-resistant
- Black




- Attach after pressure test



Caulks for connections

Geberit sealing washer for connections

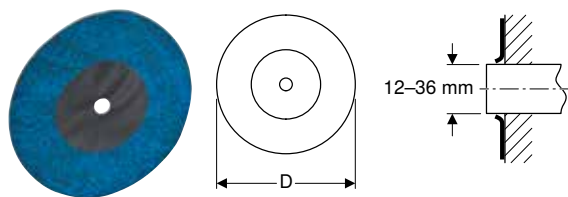

Application purposes

- For sealing Geberit connections
- For later mounting on connections with smooth surface


Characteristics

- Self-adhesive
- Fleece-laminated
- Sealing diaphragm made of PUR

Art. no.	D [cm]	s [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.812.00.1	15	1	100	10	1	2.92

Covers for pipes

Geberit pipe sleeve, slit



Application purposes

- For cladding visible pipes

Characteristics

- Pure white RAL 9010

Technical data

Product material	PP
------------------	----

Art. no.	di, \emptyset [mm]	L [m]	SU2 [m]	GBP/m
611.605.BM.1	15-20	1	5	3.30

Geberit double collar



Application purposes

- For covering pipe feed-throughs

Characteristics

- Two-piece
- Pure white RAL 9010

Technical data


Product material	PS
------------------	----

Art. no.	a [cm]	di, \emptyset [mm]	L [cm]	B [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.610.BM.1	5	14 / 15 / 16 / 18 / 20	10	5	100	10	1.64

Cover for fittings

New

Geberit FlowFit cover for pressing connection

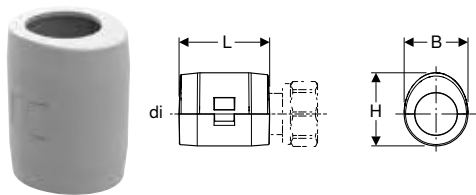

Application purposes

- For optical covering of exposed pressing units
- For visible radiator connection with Geberit FlowFit pressing connections and threads for Euro cone

Characteristics

- Two-piece
- Elliptic

Technical data

Product material	ASA
------------------	-----

Art. no.	Colour / surface	di, \emptyset [mm]	L [cm]	B [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.738.00.1	white alpine	16	4.4	2.7	3.2	10	2	2.99
619.739.00.1	white alpine	20	4.4	3.1	3.6	10	2	2.99


Available as of April 2023

Accessories

- Geberit FlowFit connector for Euro cone, with union nut → p. 317

Pipe fastenings

Geberit single-pipe clip



Application purposes

- For fastening Geberit system pipes

Characteristics


- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	di, \emptyset [mm]	m [mm]	SU2 [pc.]	GBP/pc.
601.763.00.1	16	6.2	100	0.33
602.763.00.1	20	6.2	100	0.47
601.761.00.1	22	6.2	100	0.26
602.761.00.1	28	6.2	100	0.46

Geberit double pipe-clip



Application purposes

- For fastening Geberit system pipes

Characteristics


- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	di, \emptyset [mm]	m [mm]	SU2 [pc.]	GBP/pc.
602.762.26.1	28	6.2	50	0.71

Geberit pipe clamp with hammer fixing, single



Application purposes

- For fastening Geberit system pipes

Characteristics

- Nail made of steel, zinc-plated


Technical data

Product material	Plastic
------------------	---------

Art. no.	di, \emptyset [mm]	SU3 [pc.]	GBP/pc.
601.710.00.1	15-16	100	1.62
602.710.00.1	20-22	100	1.80
603.710.00.1	25-28	100	2.07

New

Geberit anchor-point fastening

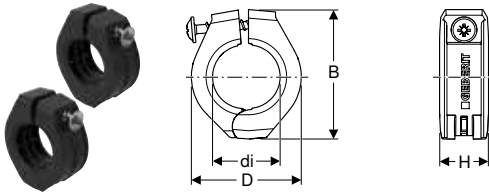

Application purposes

- For anchor-point fastening of Geberit system pipes ML

Characteristics

- One-piece
- Black

Technical data

Product material	PA 6
------------------	------


Scope of delivery

- Set of 2 pieces

Art. no.	di, \emptyset [mm]	D [cm]	B [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
619.730.00.1	16	3.1	4	1.9	50	10	7.88
619.731.00.1	20	3.5	4.4	1.9	50	10	8.92
619.732.00.1	25	4	4.9	1.9	50	10	9.94
619.733.00.1	32	4.7	5.6	1.9	50	10	11.53
619.734.00.1	40	5.6	6.5	1.9	40	10	13.66
619.735.00.1	50	6.6	7.8	2.2	20	2	16.51
619.736.00.1	63	8	9.1	2.2	20	2	20.97
619.737.00.1	75	9.2	10.3	2.2	10	2	28.31

Available as of April 2023

Geberit pipe bracket lining shell



Application purposes

- For sliding bracket fastening of Geberit system pipes ML for Geberit FlowFit
- For anchor point or sliding bracket fastening of Geberit Mepla system pipes, ML

Characteristics


- Two-piece
- Black

Technical data

Product material	PP-C
------------------	------

Art. no.	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
603.702.00.1	32	25 / 26	3.4	3.2	2.5	10		2.89
604.702.00.1	40	32	4.9	3.2	2.5	10		2.89
605.702.00.1	50	40	5.7	3.3	2.5	10		3.98
606.702.00.1	63	50	7.6	3.4	2.5	10		4.74
607.702.00.1	75	63	9.1	4.8	3		1	7.49
608.702.00.1	90	75	10.7	5	3	2		28.03

Geberit pipe bracket, insulated, with threaded socket M8 / M10

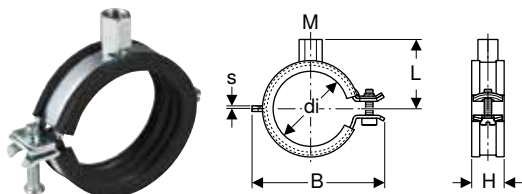

Application purposes

- For fastening Geberit system pipes for supply systems

Characteristics


- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	M [mm]	di, \emptyset [mm]	s [mm]	L [cm]	B [cm]	H [cm]	SU2 [pc.]	GBP/pc.
601.851.26.1	galvanized	8 / 10	15-19	1.5	3.1	5.2	2.3	50	2.13
601.852.26.1	galvanized	8 / 10	20-24	1.5	3.4	5.6	2.3	50	2.13
601.853.26.1	galvanized	8 / 10	25-30	1.5	3.6	6.3	2.3	50	2.29
601.854.26.1	galvanized	8 / 10	32-37	1.5	3.9	6.8	2.3	50	2.46
601.855.26.1	galvanized	8 / 10	40-46	2	4.3	7.6	2.3	50	2.64
601.856.26.1	galvanized	8 / 10	48-53	2	4.5	8.2	2.3	50	2.82
601.858.26.1	galvanized	8 / 10	63-67	2	5.5	10	2.3	50	4.22
601.859.26.1	galvanized	8 / 10	74-80	2	6.4	11.9	2.3	50	4.41

Geberit support shell, zinc-plated and coated



Application purposes

- For stabilising Geberit fastening systems

Characteristics


- Coated
- Steel, black coated exterior
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	di, \emptyset [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
360.850.00.1	coated	40	40	0.75	3	30	3	11.19
361.850.00.1	coated	50	50	0.75	3	30	3	12.52
364.850.00.1	coated	60	63	0.75	3	30	3	16.88
365.850.00.1	coated	70	75	0.75	3	30	3	17.06

Geberit double nipple M10 / G 1/2"



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Reduced
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.71

Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1.15	2	1	35.02

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.37

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"



Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	3.92

Fastenings for connectors

Geberit mounting plate, straight, single



Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data


Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.736.00.1	40	5	4.17

Geberit mounting plate, straight, double, connecting distance 10 cm or 12 cm

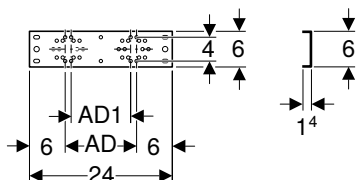

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.738.00.1	12	10	50	5	9.99

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit mounting plate, straight, double, connecting distance 7.3 cm or 15.3 cm

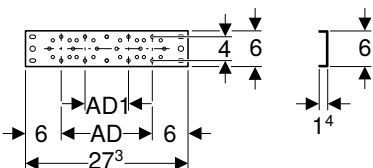

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Fastening material


Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.737.00.1	15.3	7.3	1500	50	5	5.55

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107



Geberit mounting plate, offset, single



Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data


Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Art. no.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.733.00.1	400	25	5	6.08

Geberit mounting plate, offset, double, connecting distance 10 cm or 12 cm

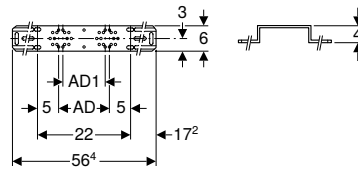

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.731.00.1	12	10	420	5	7.13

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit mounting plate, offset, double, connecting distance 7.3 cm or 15.3 cm

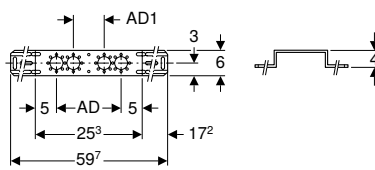

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.732.00.1	15.3	7.3	420	5	6.33

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit drain pipe bracket for mounting plates

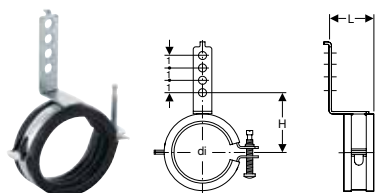

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Characteristics

- Sound-absorbing
- Zinc-plated

Art. no.	di, \emptyset [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.741.00.1	50-56	3.6	5.2-5.5	25	5	1	4.08

Geberit mounting aid set for straight connector, for drywall construction



Technical data

Product material	Steel / plastic
------------------	-----------------

Scope of delivery

- Stud bolt G 1/2"
- Protection box


Characteristics

- Reusable

Art. no.	G ["]	SU2 [pc.]	GBP/pc.
601.744.00.1	1/2	2	14.05

New

Geberit mounting plate, offset, double, connecting distance 15.3 cm

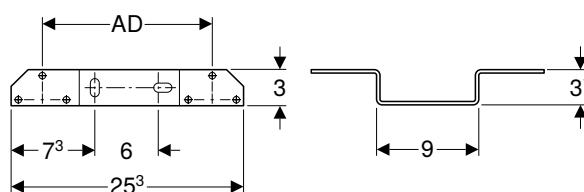

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.742.00.1	15.3	5	1	7.68

Available as of April 2023

System seals

Geberit flat gasket Centellen® R WS 3825



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit PushFit

Technical data

Operating temperature	-30 – +150 °C
Product material	Centellen® R WS 3825

Art. no.	G ["]	da [mm]	di, Ø [mm]	s [mm]	SU2 [pc.]	GBP/pc.
242.976.00.1	3/8	15	10	2	5	2.29
242.319.00.1	1/2	19	11	2	10	2.24
242.323.00.1	1	30	21	2	10	2.24
242.324.00.1	1 1/8	34	24	2	10	2.24
242.325.00.1	1 1/4	38	27	2	10	2.24
242.326.00.1	1 1/2	45	32	2	5	2.24
242.327.00.1	1 3/4	49	36	2	5	2.24
242.329.00.1	2	57	42	2	5	3.35
242.330.00.1	2 1/4	62	42	2	5	6.73
242.331.00.1	2 3/8	66	52	2	5	7.88
242.332.00.1	2 1/2	72	54	2	5	9.70
242.333.00.1	2 3/4	78	63	2	5	13.49

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, Ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
91047	65	116	76	2	6	1	6.49

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91037	65	127	76	2	10 / 16	5	1	5.10

Bolt sets for flange connections

Geberit bolt set for flange connection, made of zinc-plated steel



Application purposes

- For flanges made of carbon steel, gunmetal and brass

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated
- Strength class 8.8, EN 20898-2


Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91064	10	11	4.5	3.1	4	2.49
91065	10	11	5	3.6	4	2.49
91066	12	14	5	3	4	2.49
91067	12	14	5.5	3.5	4	2.49
91068	12	14	6	4	4	2.49
91069	16	18	5.5	3.3	4	2.49
91070	16	18	6	3.8	4	2.49
91071	16	18	6.5	4.3	4	2.49
91072	16	18	7	4.8	4	2.49
91073	16	18	8	5.8	4	2.49



Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91164	10	11	4.5	3.1	4	2.47
91165	10	11	5	3.6	4	2.47
91166	12	14	5	3	4	3.08
91167	12	14	5.5	3.5	4	3.08
91168	12	14	6	4	4	2.35
91169	16	18	5.5	3.3	4	2.79
91170	16	18	6	3.8	4	2.79
91171	16	18	6.5	4.3	4	2.79
91172	16	18	7	4.8	4	2.79
91173	16	18	8	5.8	4	2.79

Consumables

New

Geberit leak detection spray



Application purposes

- For a dry leak test

Characteristics

- Suitable for all Geberit supply systems
- pH-neutral
- Non-combustible
- Does not promote corrosion

Technical data

Operating temperature	-15 – +50 °C
Product material	PPSU

Art. no.	Content (ml)	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.942.00.1	400	12	1	11.59

Available as of April 2023





Geberit Mepla

Preliminary Remarks	335
Application overview – Geberit Mepla	337
System pipes ML	338
System pipes, heating, ML	340
Fittings	342
Couplings	342
Reducers.....	343
Elbows	344
T-pieces.....	344
Adaptors, permanent.....	347
Adaptors and connections, detachable.....	351
Sealings.....	357
Connections	358
Manifolds with threaded connection.....	366
T-pieces for heating.....	368
Connections for heating.....	368
Accessories	375
Insulations for pipes and fittings.....	375
Insulations for connectors.....	375
Caulks for pipes and fittings.....	376
Caulks for connections.....	377
Pipe covers	377
Pipe fastenings.....	378
Connector fastenings	381
System seals.....	384
Sets of bolts for flange connections.....	385



Preliminary Remarks

Introduction to Geberit Mepla

The Geberit Mepla multilayer pipe system combines the characteristics of plastics with those of metals.

The multilayer pipe, which consists of a plastic inner pipe, an aluminium pipe and a protective plastic layer on the outside, allows for easy, safe and flexible processing, whilst also complying with high hygiene standards.

The fittings made of PVDF and gunmetal or brass ensure a high degree of safety during processing as well as reliable tightness. These characteristics make Geberit Mepla especially suited to potable water supply and heating installations.

With pressing technology, installations can be carried out reliably and quickly without the need for hot works.

Benefits of Geberit Mapress Mepla

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Clean installation using the Geberit pressing technology.
No consumable required.

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Stable

The aluminium layer ensures a high level of stability and extraordinary mechanical strength

Flexible

16 and 20mm pipes can be bent by hand, reducing the number of fittings required

Experienced

More than 30 years of practical experience in pressing technology

The 4 stage pressing process

- Cut and deburr the pipe
- Prepare the fitting
- Insert the pipe in to the fitting
- Press with the appropriate jaw or collar

Check you are using the correct material for the required application.

Only Geberit Mepla system pipes are suitable to press Geberit Mepla fittings. To adapt to geberit Mapress pipes, use the Geberit Mepla to Mapress adapter. To adapt to other materials use a threaded adapter.

Always check that you are using the correct tools

Make sure that the tools you are using are in a good condition and are calibrated.

If you require any technical assistance, please contact the technical department on 01926 516800, or email technical@geberit.co.uk.



Application overview – Geberit Mepla

Geberit Great Britain, Version: December 2022

Application purposes	Operating temperature	Maximum operating pressure	Pipes	
			Mepla, ML	MeplaTherm, ML, NPW
Liquid media				
For cold and hot potable water	0–70 °C ³⁾	10 bar /1000 kPa	✓	
For cold potable water	0–20 °C	16 bar / 1600 kPa ⁵⁾	✓	
For cooling and heating water without antifreeze agent	0–80 °C ⁴⁾	10 bar /1000 kPa	✓	✓
For cooling and heating water with antifreeze agent	-10 – +80 °C	10 bar /1000 kPa	✓	✓
For service water and process water	0–70 °C	10 bar /1000 kPa	6)	6)
For treated water ¹⁾	0–70 °C	10 bar /1000 kPa	✓ ⁷⁾	✓ ⁷⁾
For rainwater with a pH value of > 6.0	0–70 °C	10 bar /1000 kPa	✓	✓
For seawater	0–70 °C	10 bar /1000 kPa	✓	✓
For chemicals and technical liquids	0–70 °C	Upon request	6)	6)
Gaseous media				
For compressed air (oil purity class 0–3)	0–70 °C	10 bar /1000 kPa	✓	✓
For negative pressure ²⁾	0–70 °C	Abs. ≥ 0,2 bar/20 kPa	✓	✓

✓ Application generally approved if the defined additional requirements are met in accordance with the footnotes

¹⁾ Application range according to the Technical Information on 'Treated water'

²⁾ Usable negative pressure for Geberit piping systems:

The usable negative pressure is calculated on the basis of the air pressure at the place of installation minus the absolute pressure of 200 mbar.

Example: 980 mbar air pressure - 200 mbar absolute pressure = 780 mbar usable negative pressure in the piping system

³⁾ Malfunction temperature in accordance with EN 806-2: Tmal = 95 °C, total 100 h over the course of the service life

⁴⁾ Malfunction temperature in accordance with ISO 10508:2006: Tmal = 100 °C, total 100 h over the course of the service life

⁵⁾ 10 bar/1000 kPa for MasterFix

⁶⁾ Following Geberit approval

⁷⁾ Application range according to TI "Treated Waters"

⁸⁾ pH value ≥ 7.0 permissible in connection with brass

⁹⁾ Use of inhibitors, corrosion-protection agents, antifreeze agents only after approval by Geberit

¹⁰⁾ Oil purity class in accordance with ISO 8573-1:2010E; for details on moisture and particles, see technical information "Geberit Piping Systems for Compressed Air Installations"




- The operating conditions specified in the relevant approvals, standards and technical regulations must be observed for each application. These may deviate from the aforementioned specifications.

	Fittings				O-rings	Flat gaskets for screw connections	Flange gaskets
	PVDF	Gunmetal	Brass	Stainless steel	EPDM, black	Centellen® R WS 3825	Centellen® HD WS 3822
	✓	✓	✓		✓	✓	✓
	✓	✓	✓		✓	✓	✓
	✓	✓	✓	✓	✓	✓	✓
	✓	✓	✓	✓	✓ ⁹⁾	✓	✓
	6)	6)		6)	6)	6)	6)
	✓ ⁷⁾	✓ ⁷⁾		✓ ⁷⁾	✓ ⁷⁾	✓ ⁷⁾	✓ ⁷⁾
	✓	✓	✓ ⁸⁾	✓	✓	✓	✓
	✓	✓			✓	✓	✓
	6)	6)	6)	6)	6)	6)	6)
	✓	✓	✓	✓	✓ ¹⁰⁾	✓	✓
	✓	✓	✓	✓	✓	✓	✓



System pipes ML

Geberit Mepla system pipe, ML, in bars

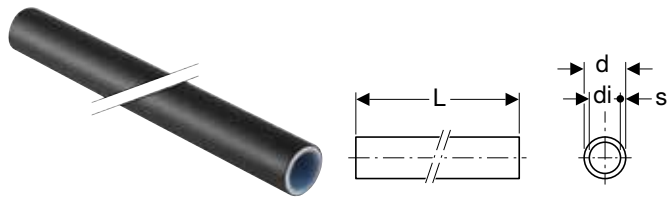

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Characteristics


- Inherently stable
- Forms a barrier against diffusion
- Black exterior
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	SU4 [m]	SU3 [m]	GBP/m
L / length: 5 m							
601.100.00.1	12	16	11.5	2.25	4440	120	4.35
602.100.00.1	15	20	15	2.5	3360	120	5.97
603.100.00.1	20	26	20	3	2760	120	9.89
604.100.00.1	25	32	26	3	2000	50	13.04
605.100.00.1	32	40	33	3.5	1400	50	23.26
606.100.00.1	40	50	42	4	750	50	28.47
607.100.00.1	50	63	54	4.5	500	25	41.66
608.100.00.1	65	75	65.6	4.7	300	25	71.57

Accessories

- Geberit Mepla pliers → p. 444
- Geberit pipe cutter ML → p. 434
- Geberit Mepla deburring and calibration tool → p. 445
- Geberit insulation hose → p. 318

Geberit Mepla system pipe, ML, in coils

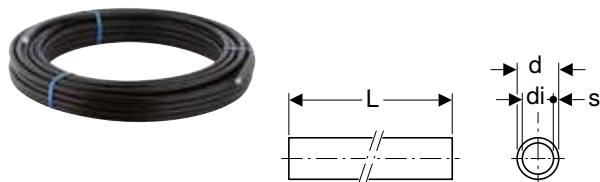

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Characteristics


- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- Black exterior
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
601.130.00.1	12	16	11.5	2.25	50	500	50	3.42
601.130.00.2	12	16	11.5	2.25	100	1000	100	3.42
602.130.00.1	15	20	15	2.5	50	500	50	4.68
602.130.00.2	15	20	15	2.5	100	600	100	4.68
603.110.00.1	20	26	20	3	50	250	50	8.14

Accessories

- Geberit Mepla pliers → p. 444
- Geberit Mepla deburring and calibration tool → p. 445
- Geberit insulation hose → p. 318

Geberit Mepla system pipe, ML, in protective tube, in coils



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Characteristics


- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, black exterior
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
601.131.00.2	12	16	11.5	2.7	2.25	50	500	50	4.16
602.131.00.2	15	20	15	3.1	2.5	50	300	50	5.77

Accessories

- Geberit Mepla deburring and calibration tool → p. 445
- Geberit Mepla pliers → p. 444

Geberit Mepla system pipe, ML, with circular pre-insulation, in coils



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / Al / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, black exterior
- Closed-cell insulation, blue protective foil
- Pipe end with transparent protection plug


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm										
601.132.00.1	12	16	11.5	2.8	2.25	6	50	300	50	5.32
602.132.00.1	15	20	15	3.2	2.5	6	50	300	50	6.68
603.132.00.1	20	26	20	3.8	3	6	25	150	25	11.18
Insulation: 10 mm										
601.135.00.1	12	16	11.5	3.6	2.25	10	50	250	50	5.89
602.135.00.1	15	20	15	4	2.5	10	50	200	50	7.51
603.135.00.1	20	26	20	4.6	3	10	25	125	25	12.38
Insulation: 13 mm										
601.136.00.1	12	16	11.5	4.2	2.25	13	50	200	50	7.45
602.136.00.1	15	20	15	4.6	2.5	13	50	200	50	9.52
603.136.00.1	20	26	20	5.2	3	13	25	100	25	13.93

Accessories

- Geberit Mepla deburring and calibration tool → p. 445
- Geberit Mepla pliers → p. 444



Geberit Mepla system pipe, ML, with circular pre-insulation, in coils



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, black exterior
- Closed-cell insulation, red protective foil
- Pipe end with transparent protection plug


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm										
601.134.00.1	12	16	11.5	2.8	2.25	6	50	300	50	5.30
602.134.00.1	15	20	15	3.2	2.5	6	50	300	50	6.67
603.134.00.1	20	26	20	3.8	3	6	25	150	25	11.74

Accessories

- Geberit Mepla deburring and calibration tool → p. 445
- Geberit Mepla pliers → p. 444

System pipes, heating, ML

Geberit Mepla system pipe, ML, MeplaTherm, in bars



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Characteristics


- Inherently stable
- Forms a barrier against diffusion
- White exterior
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
601.200.00.1	12	16	11.5	2.25	5	4440	120	5	3.56
602.200.00.1	15	20	15	2.5	5	3360	120	5	5.03
603.200.00.1	20	26	20	3	5	2760	120	5	6.90

Accessories

- Geberit Mepla pliers → p. 444
- Geberit pipe cutter ML → p. 434
- Geberit Mepla deburring and calibration tool → p. 445
- Geberit insulation hose → p. 318

Geberit Mepla system pipe, ML, MeplaTherm, in coils



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Characteristics


- Inherently stable
- Can be bent by hand
- Forms a barrier against diffusion
- White exterior
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
601.230.00.1	12	16	11.5	2.25	100	1000	100	2.89
601.230.00.2	12	16	11.5	2.25	200	1200	200	3.00
602.230.00.1	15	20	15	2.5	100	600	100	3.92
603.230.00.1	20	26	20	3	50	250	50	5.19

Accessories

- Geberit Mepla pliers → p. 444
- Geberit Mepla deburring and calibration tool → p. 445
- Geberit insulation hose → p. 318

Geberit Mepla system pipe, ML, MeplaTherm, in protective tube, in coils



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, white exterior
- Pipe end with transparent protection plug


Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
601.231.00.2	12	16	11.5	2.7	2.25	50	500	50	3.14
602.231.00.2	15	20	15	3.1	2.5	50	300	50	4.16

Accessories

- Geberit pliers → p. 434
- Geberit Mepla deburring and calibration tool → p. 445



Geberit Mepla system pipe, ML, MeplaTherm, with circular pre-insulation, in coils



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	PE-RT II / AI / PE-RT II
Surface roughness	7 µm
Thermal expansion	0.026 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)
Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)
Water vapour diffusion resistance, outer skin of insulation	7000 µ

Characteristics

- Inherently stable
- Can be bent by hand
- Media pipe forms a barrier against diffusion
- Media pipe, white exterior
- Closed-cell insulation, red protective foil
- Fire behaviour class E according to EN 13501-1
- Pipe end with transparent protection plug

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	s [mm]	s1 [mm]	L [m]	SU4 [m]	SU2 [m]	GBP/m
Insulation: 6 mm										
601.232.00.1	12	16	11.5	2.8	2.25	6	50	300	50	4.16
602.232.00.1	15	20	15	3.2	2.5	6	50	300	50	5.89
603.232.00.1	20	26	20	3.8	3	6	25	150	25	10.56
Insulation: 10 mm										
601.235.00.1	12	16	11.5	3.6	2.25	10	50	250	50	5.02
602.235.00.1	15	20	15	4	2.5	10	50	200	50	6.92
603.235.00.1	20	26	20	4.6	3	10	25	125	25	11.56


Accessories

- Geberit pliers → p. 434
- Geberit pipe cutter ML → p. 434
- Geberit Mepla deburring and calibration tool → p. 445

Fittings

Couplings

Geberit Mepla coupling



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data


Product material	PVDF
------------------	------

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
621.505.00.5	12	16	6.8	1.6		140	10	1	4.23
622.505.00.5	15	20	7.3	1.6	6400	100	10	1	5.68
623.505.00.5	20	26	7.9	1.4		70	10	1	8.77
624.505.00.5	25	32	9	1.4	2560	40	10		12.81
625.505.00.5	32	40	10.4	1.7	1280	20	5		23.85
626.505.00.5	40	50	11.7	1.8		15	5		30.68
627.505.00.5	50	63	15.6	2	640	10		1	61.35
628.505.00.5	65	75	19.5	2.1	256	4		1	102.26

Geberit Mepla long coupling



Application purposes

- For creating additional connections in existing pipelines
- For connecting prefabricated pipe sections with length compensation
- For technical building systems, industry and shipbuilding
- For repairing damaged Geberit Mepla system pipes, ML
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.575.00.5	12	16	12.3	6.6	25	5	1	40.92
602.575.00.5	15	20	13.4	7.3	25	5	1	44.48
603.575.00.5	20	26	15.3	8.2	25	5	1	47.79
604.575.00.5	25	32	14.2	7.5	20	5	1	58.78
605.575.00.5	32	40	16.8	8.7	10	5	1	81.89
606.575.00.5	40	50	18.8	9.3	10		1	117.03

Reducers

Geberit Mepla reducer



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Concentric
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	PVDF
------------------	------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
622.650.00.5	15 / 12	20	16	7.1	1.6		100	10		5.47
623.650.00.5	20 / 12	26	16	7.5	1.6		70	10		8.50
623.651.00.5	20 / 15	26	20	7.8	1.6		80	10	1	8.50
624.651.00.5	25 / 15	32	20	8.5	1.8	3200	50	10		13.64
624.652.00.5	25 / 20	32	26	8.5	1.4		50	10		13.64
625.651.00.5	32 / 15	40	20	9	1.8		40	5		23.85
625.652.00.5	32 / 20	40	26	9.2	1.5		40	5		23.85
625.653.00.5	32 / 25	40	32	9.7	1.5		30	5		23.85
626.652.00.5	40 / 25	50	32	10.3	1.5		20	5		27.31
626.653.00.5	40 / 32	50	40	11.1	1.7		20	5		27.31
627.653.00.5	50 / 32	63	40	13.1	1.9	640	10		1	56.22
627.654.00.5	50 / 40	63	50	13.7	2	640	10		1	56.22
628.653.00.5	65 / 32	75	40	15.2	2.1	384	6		1	78.41
628.654.00.5	65 / 40	75	50	15.8	2.1	384	6		1	78.41
628.655.00.5	65 / 50	75	63	17.6	2.1	384	6		1	78.41



Elbows

Geberit Mepla elbow

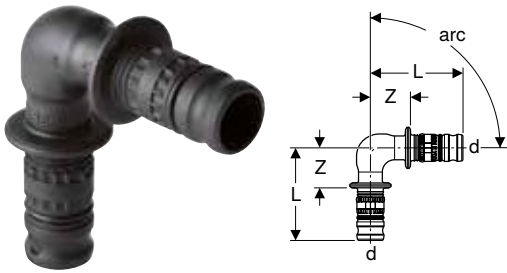

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Technical data

Product material	PVDF
------------------	------

Art. no.	DN	d, ø [mm]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
arc / angle: 45°									
623.245.00.5	20	26	4.8	1.5		50	10		14.46
624.245.00.5	25	32	5.5	1.8		30	10		17.01
625.245.00.5	32	40	6.5	2.2		20	5		33.23
626.245.00.5	40	50	7.4	2.5		30	5		39.17
627.245.00.5	50	63	9.5	2.8	360	15		1	83.53
628.245.00.5	65	75	11.6	2.9	168	7		1	124.45
arc / angle: 90°									
621.271.00.5	12	16	4.4	1.8		100	10		5.47
622.271.00.5	15	20	5.1	2.2	6400	100	10	1	6.30
623.271.00.5	20	26	5.5	2.2	3200	50	10		9.01
624.271.00.5	25	32	6.4	2.6	2400	100	10	1	13.64
625.271.00.5	32	40	7.6	3.2	1200	50	10		28.95
626.271.00.5	40	50	8.8	3.8	720	30	5		37.51
627.271.00.5	50	63	12	4.8	336	14		1	68.22
628.271.00.5	65	75	14.6	5.9	256	4		1	107.37

T-pieces

Geberit Mepla T-piece, equal

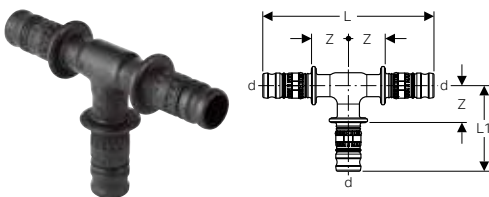

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	PVDF
------------------	------

Art. no.	DN	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
621.310.00.5	12	16	9.6	4.8	2.2	4480	70	10		9.60
622.310.00.5	15	20	10.1	5.1	2.2	3200	50	10		10.05
623.310.00.5	20	26	11	5.5	2.2	2560	40	10		16.20
624.310.00.5	25	32	12.8	6.4	2.6		50	10		25.55
625.310.00.5	32	40	15.2	7.6	3.2	600	25	5		40.91
626.310.00.5	40	50	17.6	8.8	3.8	480	20	5		49.40
627.310.00.5	50	63	23.2	11.6	4.8	240	10		1	80.13
628.310.00.5	65	75	29.3	14.6	5.9	120	5		1	153.41

Geberit Mepla T-piece, reduced



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Technical data

Product material	PVDF
------------------	------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
622.313.00.5	12 / 15 / 12	16	20	16	9.6	5.1	2.2	2.2	2.2		70	10		10.11
622.314.00.5	15 / 12 / 12	20	16	16	9.9	4.8	2.2	2.2	2.2	5120	80	10		10.05
622.311.00.5	15 / 12 / 15	20	16	20	10.1	4.8	2.2	2.2	2.2	3200	50	10		10.05
622.312.00.5	15 / 15 / 12	20	20	16	9.9	5.1	2.2	2.2	2.2		70	10		10.05
623.318.00.5	15 / 20 / 15	20	26	20	11.3	5.5	2.8	2.2	2.8	2560	40	10		10.05
623.311.00.5	20 / 12 / 20	26	16	26	10	5.2	1.7	2.6	1.7	3200	50	10	1	12.81
623.317.00.5	20 / 15 / 15	26	20	20	10.9	5.7	2.2	2.8	2.5	2560	40	10	1	12.81
623.315.00.5	20 / 15 / 20	26	20	26	11	5.7	2.2	2.8	2.2	2560	40	10		12.81
623.316.00.5	20 / 20 / 15	26	26	20	11.5	5.8	2.2	2.2	2.8	2560	40	10	1	12.81
624.311.00.5	25 / 12 / 25	32	16	32	11.6	5.5	2	2.9	2		30	10		21.10
624.314.00.5	25 / 15 / 20	32	20	26	11.5	6	2.2	3.1	2.2		30	10	1	21.10
624.317.00.5	25 / 15 / 25	32	20	32	11.6	6	2	3.1	2		30	10		21.10
624.316.00.5	25 / 20 / 20	32	26	26	11.7	5.9	2.3	2.6	2.3		30	10	1	21.10
624.319.00.5	25 / 20 / 25	32	26	32	12.2	5.9	2.3	2.6	2.3	1280	20	10		21.10
625.317.00.5	32 / 15 / 32	40	20	40	13.2	6.4	2.2	3.5	2.2	960	15	5		38.56
625.319.00.5	32 / 20 / 32	40	26	40	13.8	6.5	2.5	3.2	2.5	960	40	5		38.56
625.321.00.5	32 / 25 / 32	40	32	40	14.4	7.2	2.8	3.2	2.8	840	35	5		38.56
626.317.00.5	40 / 20 / 40	50	26	50	15.4	7.1	2.7	3.8	2.7	600	25	5		42.23
626.319.00.5	40 / 25 / 40	50	32	50	16	7.6	3	3.8	3	480	20	5		42.23
626.320.00.5	40 / 32 / 32	50	40	40	16.2	8.2	3.4	3.8	3.4	480	20	5		42.23
626.321.00.5	40 / 32 / 40	50	40	50	16.8	8.2	3.4	3.8	3.4	320	20	5		42.23
627.316.00.5	50 / 20 / 50	63	26	63	19.2	7.9	2.8	4.6	2.8	320	5		1	71.33
627.320.00.5	50 / 25 / 50	63	32	63	19.8	8.6	3.1	4.8	3.1	320	5		1	71.33
627.321.00.5	50 / 32 / 50	63	40	63	20.8	9.2	3.6	4.8	3.6	320	5		1	71.33
627.322.00.5	50 / 40 / 50	63	50	63	22	9.8	4.2	4.8	4.2	336	14		1	71.33
628.316.00.5	65 / 20 / 65	75	26	75	23.5	8.9	3.1	5.5	3.1	144	6		1	145.96
628.320.00.5	65 / 25 / 65	75	32	75	24	8.8	3.3	5	3.3	144	6		1	145.96
628.321.00.5	65 / 32 / 65	75	40	75	24.9	9.9	3.7	5.5	3.7	120	5		1	145.96
628.322.00.5	65 / 40 / 65	75	50	75	25.9	10.8	4.2	5.8	4.2	120	5		1	145.96
628.323.00.5	65 / 50 / 65	75	63	75	27.7	12.7	5.2	6	5.2	120	5		1	145.96



Geberit Mepla T-piece with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp [°]	d1, ø [mm]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.360.00.5	12 / 15 / 12	16	1/2	16	9.8	2.4	2.4	0.9	1600	50	10	1	25.48
602.360.00.5	15 / 15 / 15	20	1/2	20	10.3	2.4	2.4	1.1		50	10		25.71
603.360.00.5	20 / 15 / 20	26	1/2	26	11.2	2.6	2.4	1.3		25	5		27.19
603.362.00.5	20 / 20 / 20	26	3/4	26	11.8	2.8	2.7	1.4		25	5		27.19
604.360.00.5	25 / 15 / 25	32	1/2	32	10.6	3	2.5	1.7		25	5		36.31
604.362.00.5	25 / 20 / 25	32	3/4	32	11.2	3.1	2.8	1.7		25	5		36.31
604.363.00.5	25 / 25 / 25	32	1	32	12	3.5	3.2	1.8		25	5		36.31
605.360.00.5	32 / 15 / 32	40	1/2	40	12	3.2	2.6	1.7		25	5		36.43
605.362.00.5	32 / 20 / 32	40	3/4	40	12.6	3.5	2.9	2.2		25	5		63.13
605.363.00.5	32 / 25 / 32	40	1	40	13.2	3.8	3.2	2.1		25	5		36.43
605.364.00.5	32 / 32 / 32	40	1 1/4	40	14.4	4	3.8	2.1			5	1	36.43
606.361.00.5	40 / 15 / 40	50	1/2	50	13.2	3.8	2.8	2.3		10		1	60.70
606.362.00.5	40 / 20 / 40	50	3/4	50	13.8	4	3.1	2.7		10		1	105.22
606.363.00.5	40 / 25 / 40	50	1	50	14.6	4.4	3.5	2.5		10		1	60.70
606.360.00.5	40 / 40 / 40	50	1 1/2	50	16.6	4.5	4.5	2.6		10		1	60.70
607.360.00.5	50 / 15 / 50	63	1/2	63	19.2	4.2	2.9	2.7			5	1	169.94
607.363.00.5	50 / 25 / 50	63	1	63	20.6	4.8	3.6	2.9	90		5	1	169.94
607.366.00.5	50 / 50 / 50	63	2	63	23.8	5.7	5.2	3.1	90		5	1	169.94
608.363.00.5	65 / 25 / 65	75	1	75	26.1	5.1	4.4	2.9	144			1	259.80

Adaptors, permanent

New

Geberit FlowFit adaptor to Geberit Mepla

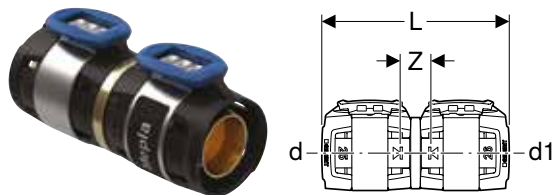

Application purposes

- For technical building systems, industry and shipbuilding
- Suitable for use as adaptor from Geberit FlowFit to Geberit Mepla
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Pressing indicator
- Pressable only with Geberit FlowFit pressing jaw
- Leaky if unpressed
- Lead-free
- O-ring made of EPDM
- Pressing connector with transparent protective cap


Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	Z [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
620.090.00.1	12	16	16	7.8	1.3	10	1	7.77
620.091.00.1	15	20	20	7.8	1.3	10	1	10.01
620.092.00.1	20	25	26	7.8	1.3	10	1	13.91
620.093.00.1	25	32	32	8.8	1.6	10	1	18.93
620.094.00.1	32	40	40	8.8	1.6	10	1	22.24
620.095.00.1	40	50	50	14	2.1	10	1	50.07
620.096.00.1	50	63	63	15	2.3	5	1	77.86
620.097.00.1	65	75	75	15	2.3	5	1	105.67

Available as of April 2023

Geberit Mepla adaptor to Geberit Mapress, with plain end



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.508.00.5	12	16	15	5.9	3.4		50	10	1	11.93
602.507.00.5	15 / 12	20	15	6.1	3.4		50	10	1	11.93
602.508.00.5	15	20	18	6.1	3.4		50	10		11.93
602.509.00.5	15 / 20	20	22	6.2	3.5		50	10	1	11.93
603.508.00.5	20	26	22	6.7	3.5		25	5		18.60
604.508.00.5	25	32	28	6.6	3.7		25	5		21.06
605.508.00.5	32	40	35	7.5	4.1		25	5		26.31
606.508.00.5	40	50	42	10.1	6.3		10		1	52.00
607.508.00.5	50	63	54	13.6	7	180	10		1	80.07

Geberit Mepla adaptor with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.535.00.5	12 / 15	16	1/2	5.4	2.8		50	10		8.36
601.536.00.5	12 / 20	16	3/4	5.7	3.1		50	10		8.36
602.535.00.5	15	20	1/2	5.7	3	5600	50	10		9.73
602.536.00.5	15 / 20	20	3/4	5.9	3.1		50	10		9.73
603.535.00.5	20 / 15	26	1/2	6.3	3.1	1600	25	5		14.36
603.536.00.5	20	26	3/4	6.4	3.2		50	5		14.36
603.537.00.5	20 / 25	26	1	6.7	3.5		25	5		14.36
604.537.00.5	25	32	1	6.4	3.6		25	5	1	19.22
604.538.00.5	25 / 32	32	1 1/4	6.6	3.9	1200	25	5		19.22
605.537.00.5	32 / 25	40	1	7.1	3.7		25	5		21.11
605.538.00.5	32	40	1 1/4	7.4	4	800	25	5		21.11
605.539.00.5	32 / 40	40	1 1/2	7.5	4.1	600	25	5	1	21.11
606.537.00.5	40	50	1 1/2	8	4.2		20	2	1	44.19
606.540.00.5	40 / 50	50	2	8.4	4.7	360	20	2		44.19
607.539.00.5	50	63	2	11.7	5		10	2		68.00
607.541.00.5	50 / 65	63	2 1/2	12.5	5.8		10	2		68.00
608.541.00.5	65	75	2 1/2	14.7	6	126			1	129.49



- Adaptors with NPT thread on demand

Geberit Mepla adaptor with male thread, NPW



Application purposes

- For industry
- Application overview – Geberit Mepla → p. 337

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Operating temperature	0–40 °C
Product material	PVDF

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
622.535.00.5	15	20	1/2	5.6	2.8	5	1	143.95
623.536.00.5	20	26	3/4	6.3	3	5	1	168.33
624.537.00.5	25	32	1	7.3	3.5	5	1	222.43
625.538.00.5	32	40	1 1/4	8.4	4		1	318.40
626.537.00.5	40	50	1 1/2	9.2	4.2		1	368.82
627.539.00.5	50	63	2	11.7	4.9		1	419.63
628.541.00.5	65	75	2 1/2	14.6	5.9		1	475.36

Geberit Mepla adaptor with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.555.00.5	12 / 15	16	1/2	5.6	1.8		50	10		8.69
601.556.00.5	12 / 20	16	3/4	5.9	1.7		50	10		8.69
602.555.00.5	15	20	1/2	5.9	1.8	3200	50	10		9.73
602.556.00.5	15 / 20	20	3/4	6.1	1.9		50	10		9.73
603.556.00.5	20	26	3/4	6.6	1.9	1600	25	5		14.36
603.557.00.5	20 / 25	26	1	7.1	2.2		25	5	1	14.36
604.557.00.5	25	32	1	6.7	2.2		25	5		19.22
604.558.00.5	25 / 32	32	1 1/4	7.4	2.3	1200	25	5		19.22
605.557.00.5	32 / 25	40	1	7.5	2.4		25	5		21.11
605.558.00.5	32	40	1 1/4	7.7	2.4		25	5		21.11
605.559.00.5	32 / 40	40	1 1/2	8.4	2.5	600	25	5		21.11
606.559.00.5	40	50	1 1/2	8.8	2.7	360	20	2		44.19
606.560.00.5	40 / 50	50	2	9.7	3.2		16	2		44.19
607.560.00.5	50	63	2	12.7	3.3	180	10		1	68.00
607.561.00.5	50 / 65	63	2 1/2	13.3	3.5		8		1	68.00
608.561.00.5	65	75	2 1/2	14.7	2.9				1	129.49

Geberit Mepla elbow adaptor 90° with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
612.256.00.5	15	20	1/2	2.5	5.3	1.2	2.5	50	10	11.62



Geberit Mepla bend adaptor 90° with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	R ["]	L [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.252.00.5	12 / 15	16	1/2	4.8	3	2.3		50	10	1	13.95
602.252.00.5	15	20	1/2	5.1	3.2	2.3		50	10		16.72
602.253.00.5	15 / 20	20	3/4	5.3	3.4	2.5		50	10		16.72
603.253.00.5	20	26	3/4	5.7	4	2.5		25	5		24.25
603.254.00.5	20 / 25	26	1	5.9	4.3	2.7	1200	25	5		24.25
604.254.00.5	25	32	1	5.9	4.6	3.1		25	5	1	32.80
605.255.00.5	32	40	1 1/4	7	5.3	3.6		25	5		39.08
606.255.00.5	40	50	1 1/2	7.7	6	3.9		10	2		58.67
607.255.00.5	50	63	2	11.6	7.5	4.9	120		5	1	125.46

Geberit Mepla bend adaptor 90° with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.256.00.5	12 / 15	16	1/2	2.2	5	0.9	2.4		50	10		13.95
602.256.00.5	15	20	1/2	2.5	5.3	1.2	2.5		50	10		16.72
602.257.00.5	15 / 20	20	3/4	3.5	5.3	2	2.5	1600	50	10		16.72
603.257.00.5	20	26	3/4	3	6.1	1.5	2.9	1200	25	5		24.25
603.258.00.5	20 / 25	26	1	3.4	6.5	1.5	3.3		25	5		24.25
604.258.00.5	25	32	1	3.6	6.2	1.9	3.4		25	5		32.80
605.259.00.5	32	40	1 1/4	4.3	7.3	2.2	3.9		10	2		39.08
606.256.00.5	40	50	1 1/2	4.8	8.1	2.8	4.3		10	2		58.67
607.256.00.5	50	63	2	5.7	11.9	3.1	5.2			5	1	125.46

Adaptors and connections, detachable

Geberit Mepla adaptor with MasterFix



Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- MasterFix with blue protective cap

Technical data

Product material	PVDF
------------------	------

Art. no.	DN	d, \varnothing [mm]	RpMF ["]	L [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
621.451.00.5	12 / 15	16	1/2	7.1	3	50	10	16.02
622.451.00.5	15	20	1/2	7.4	3	50	10	16.53

Geberit Mepla elbow adaptor 90° with MasterFix

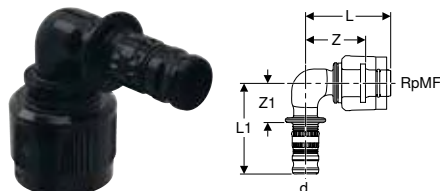

Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics


- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- MasterFix with blue protective cap

Technical data

Product material	PVDF
------------------	------

Art. no.	DN	d, \varnothing [mm]	RpMF ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
621.452.00.5	12 / 15	16	1/2	4.5	4.8	2.9	2.2	50	10	17.55
622.452.00.5	15	20	1/2	4.5	5.1	2.9	2.2	50	10	18.06

Geberit Mepla T-piece adaptor with MasterFix, through-flow

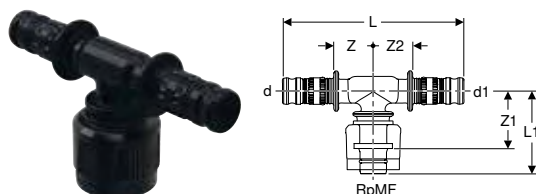

Application purposes


- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- MasterFix with blue protective cap

Art. no.	DN	d, \varnothing [mm]	RpMF ["]	d1, \varnothing [mm]	Material designation	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
621.453.00.5	12 / 15 / 12	16	1/2	16	PVDF	9.6	4.2	2.2	2.6	2.2	30	5	24.33
622.453.00.5	15	20	1/2	20	PVDF	10	4.4	2.2	2.8	2.2	30	5	26.27
622.455.00.5	15 / 15 / 12	20	1/2	16	PVDF	9.9	4.4	2.2	2.8	2.2	30	5	26.27
623.451.00.5	20 / 15 / 15	26	1/2	20	Gunmetal	10.6	4.2	2.3	2.6	2.3	20	5	64.00
623.452.00.5	20 / 15 / 20	26	1/2	26	Gunmetal	11	4.2	2.3	2.6	2.3	20	5	64.00

Geberit Mepla T-piece adaptor with MasterFix, branch fitting



Application purposes

- For tool-free connection to elements, mounting plates and connections with male thread MF 1/2"
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337


Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- MasterFix with blue protective cap

Technical data

Product material		PVDF										
Art. no.	DN	d, ø [mm]	d1, ø [mm]	RpMF1 ["]	L [cm]	L1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
621.454.00.5	12 / 12 / 15	16	16	1/2	9	4.8	2.2	2.2	2.6	30	5	25.04
622.454.00.5	15	20	20	1/2	9.4	5.1	2.2	2.2	2.8	30	5	27.04

Geberit adaptor with male thread MF 1/2" and male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177


Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Technical data

Product material		Gunmetal (CuSn5Zn5Pb2-C)										
Art. no.	DN	RMF ["]	R ["]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.					
632.007.00.1	15	1/2	1/2	4.2	10	1	12.19					
632.008.00.1	20 / 15	1/2	3/4	4.2	10	1	16.65					

Geberit adaptor with male thread MF 1/2" and male thread, stainless steel



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13


Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Technical data

Product material		CrNiMo steel 1.4401 (EN 10088)										
Art. no.	DN	RMF ["]	R ["]	H [cm]	SU1 [pc.]	GBP/pc.						
632.005.00.1	15	1/2	1/2	4.2	1	33.03						

Geberit adaptor with male thread MF 1/2" and female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics


- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Flat gasket made of Centellen® R WS 3825

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	G ["]	L [cm]	L1 [cm]	I1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
632.006.00.1	15	1/2	1/2	3.8	2.3	0.8	50	10	8.29

Geberit Mepla union

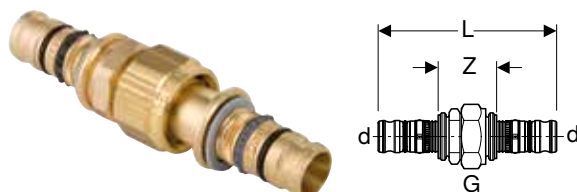

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Union nut made of brass
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Flat gasket made of Centellen® R WS 3825


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.571.00.5	12	16	1/2	9.1	4.1			5	1	21.24
602.571.00.5	15	20	1/2	9.9	4.4		50	5		23.86
603.571.00.5	20	26	3/4	11	4.6			5	1	27.94
604.571.00.5	25	32	1	11.5	5.8		10		1	36.43
605.571.00.5	32	40	1 1/4	13.1	6.3		10		1	45.52
606.571.00.5	40	50	1 1/2	14.3	6.7		10		1	91.04
607.571.00.5	50	63	2	20.8	7.4	192	6		1	190.22



Geberit Mepla adaptor union with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Leaky if unpressed
- Union nut made of brass
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Flat gasket made of Centellen® R WS 3825

Art. no.	DN	d, ø [mm]	R ["]	G ["]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.590.00.5	12 / 15	16	1/2	3/4	7.2	4.7		50	10	1	19.86
602.590.00.5	15	20	1/2	3/4	7.4	4.7	2400	50	10		20.43
602.591.00.5	15 / 20	20	3/4	3/4	7.4	4.7		50	5	1	20.43
603.590.00.5	20	26	3/4	1	8.3	5.1		25	5		26.31
604.590.00.5	25	32	1	1 1/4	8.7	5.9		25	5		36.43
604.591.00.5	25 / 32	32	1 1/4	1 1/4	9	6.1		10	2		36.43
605.590.00.5	32	40	1 1/4	1 1/2	9.6	6.2		20	5	1	47.49
605.591.00.5	32 / 40	40	1 1/2	1 1/2	10	6.5		10	2		47.49
606.590.00.5	40	50	1 1/2	1 3/4	12.1	8.3	320	10		1	90.63
606.591.00.5	40 / 50	50	2	2	11.4	7.6		10		1	90.63
607.590.00.5	50	63	2	2 3/4	14.8	8.1		5		1	130.81
607.591.00.5	50 / 65	63	2 1/2	2 3/4	15.2	8.5		4		1	130.81

Geberit Mepla adaptor union with female thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Leaky if unpressed
- Union nut made of brass
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Flat gasket made of Centellen® R WS 3825

Art. no.	DN	d, ø [mm]	Rp ["]	G ["]	L [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.595.00.5	12 / 15	16	1/2	3/4	6.6	2.8		50	10	1	19.86
602.595.00.5	15	20	1/2	3/4	6.8	2.8		50	10	1	20.43
603.595.00.5	20	26	3/4	1	7.6	3		25	5		26.31
604.595.00.5	25	32	1	1 1/4	7	2.5		25	5		36.43
604.596.00.5	25 / 32	32	1 1/4	1 1/4	8.6	3.8			5	1	36.43
605.595.00.5	32	40	1 1/4	1 1/2	9	3.7		25	5	1	47.49
605.596.00.5	32 / 40	40	1 1/2	1 1/2	9.4	4.1		10		1	47.49
606.595.00.5	40	50	1 1/2	1 3/4	11.2	5.5	320	10		1	90.63
606.596.00.5	40 / 50	50	2	2	10.9	4.8		10		1	90.63
607.595.00.5	50	63	2	2 3/4	12.4	3.4		6		1	130.81

Geberit Mepla adaptor with union nut

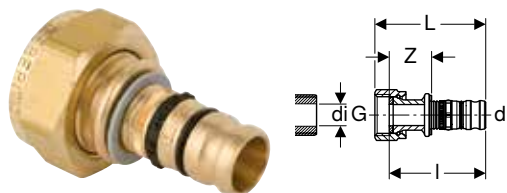

Application purposes

- Suitable exclusively for threads with an inner diameter of $\leq di$, see table
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Union nut made of brass
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Flat gasket made of Centellen® R WS 3825


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, \emptyset [mm]	G	di, \emptyset [mm]	L [cm]	l [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.582.00.5	12	16	1/2	11	5.2	4.4	1.9	1200	25	5		13.31
601.583.00.5	12	16	3/4	17	4.9	3.9	1.4	3200	50	5		13.31
601.584.00.5	12	16	1	21	5.2	4	1.4		50	10	1	13.31
601.581.00.5	12	16	1 1/8	24	5.2	4	1.4			5	1	13.31
602.582.00.5	15	20	1/2	11	5.6	4.9	2.2		50	5		13.57
602.583.00.5	15	20	3/4	17	5.2	4.3	1.3		25	5		13.57
602.584.00.5	15	20	1	21	5.6	4.1	1.5		50	10	1	13.57
602.581.00.5	15	20	1 1/8	24	5.5	4.3	1.5			5	1	13.57
602.586.00.5	15	20	1 1/4	27	5.5	4.4	1.7		50	5		13.57
602.585.00.5	15	20	1 1/2	32	5.7	4.4	1.7		50	5		13.57
603.582.00.5	20	26	1/2	11	6.3	5.5	2.4		25	5		17.84
603.583.00.5	20	26	3/4	17	6.2	5.4	2.3		25	5	1	17.84
603.584.00.5	20	26	1	21	5.6	4.8	1.5		25	5		17.84
603.586.00.5	20	26	1 1/4	27	6	4.9	1.8		25	5		17.84
603.585.00.5	20	26	1 1/2	32	6.2	4.9	1.7	800	25	5	1	17.84
603.587.00.5	20	26	2	42	6.3	5	1.8			5	1	17.84
604.583.00.5	25	32	3/4	17	6.1	5.3	2.5		25	5	1	25.90
604.584.00.5	25	32	1	21	6.7	4.8	2.9		25	5	1	25.90
604.586.00.5	25	32	1 1/4	27	5.9	4.5	1.6		25	5		25.90
604.585.00.5	25	32	1 1/2	32	5.8	4.6	1.7	600	25	5		25.90
604.581.00.5	25	32	2	42	6	4.6	1.8			5	1	25.90
605.589.00.5	32	40	1 1/4	27	7.6	6.5	3.1		10	2		32.19
605.585.00.5	32	40	1 1/2	32	6.5	5.2	1.8	600	25	5		32.19
605.581.00.5	32	40	2	42	6.6	5.2	1.9		10	2		32.19
605.582.00.5	32	40	2 1/4	42	6.7	5.2	1.9			5	1	32.19
606.585.00.5	40	50	1 1/2	32	8.2	7.1	3.3		10	2		46.52
606.580.00.5	40	50	1 3/4	36	8.1	7.3	3.4		10		1	46.52
606.581.00.5	40	50	2	42	6.8	6	2.1		10		1	46.52
606.582.00.5	40	50	2 1/4	42	7.3	5.9	2.1			5	1	46.52
606.583.00.5	40	50	2 3/8	52	7.4	5.9	2.1	240	10	2		46.52
606.584.00.5	40	50	2 3/4	63	7.5	6.8	2.1		10	2		46.52
607.581.00.5	50	63	2	42	11.5	10.3	3.6	240	10		1	83.60
607.583.00.5	50	63	2 3/8	52	11.5	10.3	3.6	180	10		1	83.60
607.587.00.5	50	63	2 1/2	54	11.5	10.3	3.6		10		1	83.60
607.584.00.5	50	63	2 3/4	63	10.6	9	2.3		10		1	83.60



Geberit Mepla adaptor to copper pipe clamping ring union



Application purposes

- Suitable exclusively for clamping ring unions
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics


- Leaky if unpressed
- Tin-plated
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Brass / copper
------------------	----------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.512.24.5	12	16	15	6.4	3.9		25	5	1	15.57
612.512.24.5	15 / 12	20	15	6.5	3.8		25	5	1	17.57
613.513.24.5	20	26	22	7.6	4.4	1500	25	5	1	21.11

Geberit Mepla adaptor with screw connection to PEX pipes



Application purposes

- For technical building systems
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Brass CW617N
------------------	--------------

Scope of delivery

- Clamping ring union

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	s1 [mm]	L [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.565.00.5	12	16	3/4	16	1.5	6.8	2.8	6	25	5	1	19.11
612.566.00.5	15	20	3/4	20	1.9	7.2	3	6	25	5	1	21.16
613.567.00.5	20	26	1	25	2.3	8	3.3	6	25	5	1	20.32

flanged stub with pressing nipple, for Geberit Mepla loose flanges PN 6 and PN 10/16

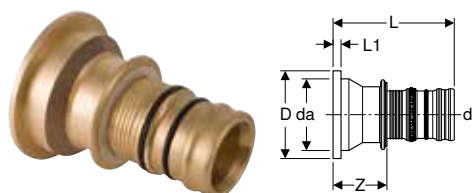

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	da [mm]	D [cm]	L [cm]	L1 [cm]	Z [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
608.520.00.5	65	75	95	11.5	15.2	0.6	6.6	120	1	173.81

To order additionally

- Geberit Mepla loose flange PN 6 → p. 357
- Geberit Mepla loose flange PN 10/16 → p. 357

Accessories

- Geberit flange gasket PN 6 → p. 111
- Geberit flange gasket PN 10/16 → p. 112

Geberit Mepla loose flange PN 6



Application purposes

- For Geberit Mepla flanged stub with pressing nipple

Characteristics

- Zinc-plated

Technical data

Product material	Non-alloy steel 1.0034 E195 (EN 10305)
------------------	--

Art. no.	DN	di, \emptyset [mm]	D [cm]	k [mm]	m [mm]	H [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.
23799	65	97	16	130	14	1.6	4	6	1	65.85

Accessories

- Geberit flange gasket PN 6 → p. 111
- Geberit bolt set for flange connection, made of zinc-plated steel → p. 171

Geberit Mepla loose flange PN 10/16



Application purposes

- For Geberit Mepla flanged stub with pressing nipple

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	di, \emptyset [mm]	D [cm]	k [mm]	m [mm]	H [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
63789	65	97	18.5	145	18	1.6	4	10 / 16	192	1	100.94

Accessories

- Geberit flange gasket PN 10/16 → p. 112
- Geberit bolt set for flange connection, made of CrNi steel → p. 112

Sealings

Geberit Mepla pipe end plug



Application purposes

- For technical building systems, industry and shipbuilding
- For permanent termination of pipe ends
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Technical data

Product material	PVDF
------------------	------

Art. no.	DN	d, \emptyset [mm]	L [cm]	l [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
621.000.00.5	12	16	3.4	2.6	50	10	3.76
622.000.00.5	15	20	3.7	2.9	50	10	3.76
623.000.00.5	20	26	4.2	3.3	50	10	3.76

Connections

Geberit Mepla elbow tap connector 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Three fastening points
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	Rp ["]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 3.6 cm										
611.289.00.5	12	16	1/2	5	1.8	1.3	2.5	50	10	11.55
612.289.00.5	15	20	1/2	5.5	1.8	1.3	2.7	50	10	12.65
L / length: 5.2 cm										
612.293.00.5	15	20	1/2	5.5	1.8	2.6	2.9	50	10	17.71

Accessories

- Geberit sound insulation set for single elbow tap connector 90° → p. 103

Geberit Mepla elbow tap connector 90°



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Three fastening points
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	L1 [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 3.6 cm												
601.289.00.5	12	16	1/2	5	1.8	1.3	2.5		50	10		14.86
602.289.00.5	15	20	1/2	5.5	1.8	1.3	2.7	3200	50	10		17.95
L / length: 5.2 cm												
601.293.00.5	12	16	1/2	5	1.8	2.6	2.5		50	10		14.34
602.293.00.5	15	20	1/2	5.5	1.8	2.6	2.7	3200	50	10		15.95
602.294.00.5	15	20	3/4	5.5	1.8	1.9	2.7	1000	50	10	1	15.95
603.294.00.5	20	26	3/4	5.9	2.1	1.9	2.7	1200	25	5		22.26
L / length: 7.8 cm												
601.296.00.5	12	16	1/2	6.5	1.8	3	4		50	10		22.54
602.296.00.5	15	20	1/2	7	1.8	3	4.2	2700	50	10		22.54

Accessories

- Geberit sound insulation set for single elbow tap connector 90° → p. 103

Geberit Mepla double elbow tap connector 90°

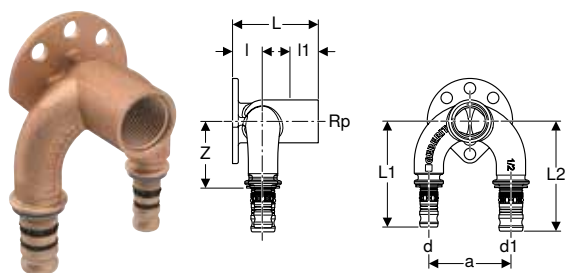

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Four fastening points
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	d, ø [mm]	Rp ["]	d1, ø [mm]	a [cm]	L1 [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 5.2 cm													
601.273.00.5	12	16	1/2	16	5	6.5	6.5	1.9	2.4	4	25	5	54.13
602.274.00.5	12 / 15	16	1/2	20	5	6.5	6.7	1.9	2.4	4	25	5	57.67
602.275.00.5	15 / 12	20	1/2	16	5	6.7	6.5	1.9	2.4	4	25	5	57.67
602.273.00.5	15	20	1/2	20	5	6.7	6.7	1.9	2.4	4	25	5	57.67

Accessories

- Geberit sound insulation set for double elbow tap connector 90° → p. 224

Geberit elbow tap connector 90° with male thread MF 1/2"

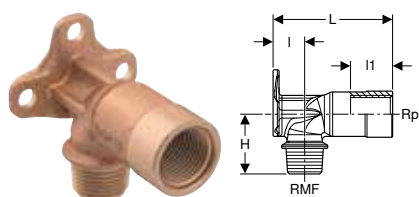

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Art. no.	DN	RMF ["]	Rp ["]	I [cm]	I1 [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L / length: 5.7 cm										
602.285.00.1	15	1/2	1/2	1.8	2.6	3.5	2500	50	10	13.27
L / length: 7.3 cm										
602.287.00.2	15	1/2	1/2	1.8	3	3.5		50	10	16.20

Accessories

- Geberit sound insulation set for single elbow tap connector 90° → p. 103



Geberit elbow tap connector 90° set with male thread MF 1/2"

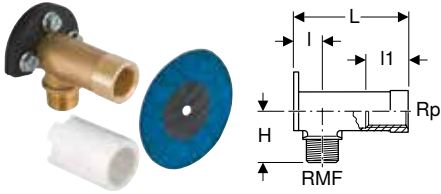

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics


- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery

- Elbow tap connector 90°
- Insulating sleeve
- Sound insulation base
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	RMF ["]	Rp ["]	l [cm]	l1 [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 7.3 cm										
465.034.00.2	15	1/2	1/2	1.8	3	3.5	50	10	1	25.37

Geberit tap connector, straight, with male thread MF 1/2"

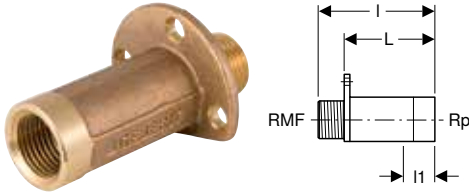

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Volex

Characteristics

- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	l [cm]	l1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L / length: 5.7 cm									
602.283.00.1	15	1/2	1/2	7.9	2.7	50	10	1	17.57

Accessories

- Geberit sound insulation base for tap connector, straight → p. 224

Geberit set of tap connector, straight, with male thread MF 1/2", premounted, drywall construction

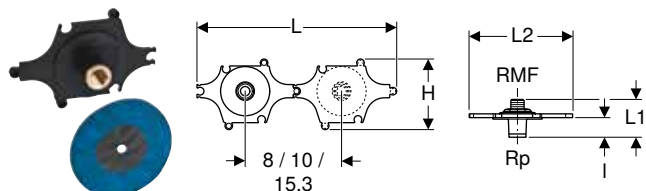

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap

Scope of delivery

- Tap connector, straight
- Insulating sleeve
- Drilling template
- Sealing washer
- Fastening material

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
602.295.00.1	15	1/2	1/2	31.6	6	16.5	3.1	11	20	2	28.46

Accessories

- Geberit mounting aid set for straight connector, for drywall construction → p. 230

Geberit T-elbow tap connector 90° set, straight, with male thread MF 1/2"

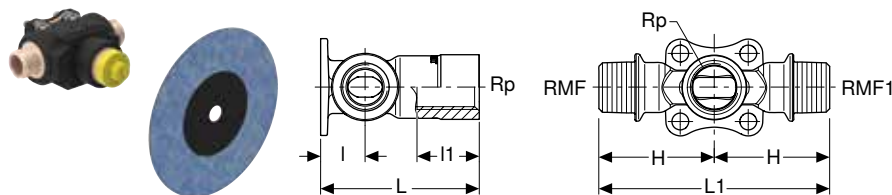

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Four fastening points
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
Material, insulation	EPP
Insulation thickness	6.5 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Scope of delivery

- Thermal insulation
- Sound insulation base
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	RMF ["]	Rp ["]	RMF1 ["]	L1 [cm]	I [cm]	I1 [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
----------	----	------------	-----------	-------------	------------	-----------	------------	-----------	--------------	--------------	--------------	---------


L / length: 7.3 cm

602.260.00.1	PO	15	1/2	1/2	1/2	9.6	1.9	3	4.8	10	2	1	60.81
--------------	----	----	-----	-----	-----	-----	-----	---	-----	----	---	---	-------

PO: Phase out as of April 2023



Geberit T-elbow tap connector 90° set, offset, with male thread MF 1/2"

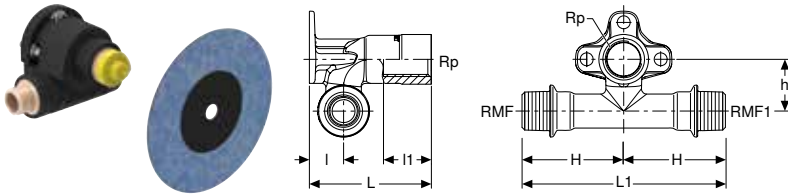

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
Material, insulation	EPP
Insulation thickness	4 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Characteristics


- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- Three fastening points
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery

- Thermal insulation
- Sound insulation base
- Sealing washer
- Protection plug
- Fastening material

Art. no.	DN	RMF ["]	Rp ["]	RMF1 ["]	L1 [cm]	l [cm]	l1 [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
L / length: 7.3 cm														
602.265.00.1	PO	15	1/2	1/2	1/2	11	1.9	3	5.5	2.8	10	2	1	60.81
PO: Phase out as of April 2023														

Geberit Mepla elbow tap connector 90°, premounted, single

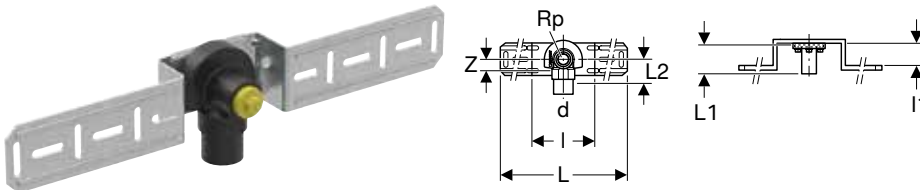

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics



- Leaky if unpressed
- Sound-absorbing
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery

- Protection plug
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L2 [cm]	l [cm]	l1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.2 cm												
601.785.00.5	12	16	1/2	46	5	10	4	2.5	140	5	1	38.66
602.785.00.5	15	20	1/2	46	5.5	10	4	2.7	140	5	1	38.66

Geberit Mepla elbow tap connector 90°, premounted, double



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Leaky if unpressed
- Sound-absorbing
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery



- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.2 cm														
601.781.00.5	12	16	1/2	15.3	7.3	59.7	5	25.3	4	2.5	140	5	1	65.53
602.781.00.5	15	20	1/2	15.3	7.3	59.7	5.5	25.3	4	2.7	140	5	1	65.53
602.782.00.5	15	20	1/2	10	12	56.4	5.5	25.3	4	2.7	140	5	1	65.53

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit Mepla elbow tap connector 90°, premounted, double



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- 2 protection plugs
- Fastening material




Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.2 cm														
602.780.00.5	15	20	1/2	15.3	7.3	59.7	5.5	25.3	4	2.7	140	5	1	56.62

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107



Geberit Mepla elbow tap connector 90°, premounted, double

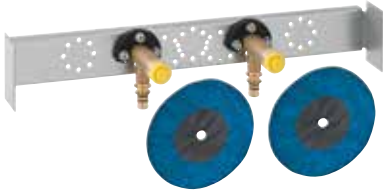

Application purposes

- For drywall construction
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Leaky if unpressed
- Sound-absorbing
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery



- 2 sealing washers
- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L2 [cm]	I [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 7.8 cm													
602.784.00.5	15	20	1/2	15.3	7.7	50	5.5	7	2.7	120	5	1	100.24

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit Mepla elbow tap connector 90°, premounted, double, with drain pipe bracket and connection bend



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics


- Leaky if unpressed
- Sound-absorbing
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa
- Connecting distance AD can be changed to AD1

Scope of delivery

- Pipe bracket for outlet bend
- Connection bend 90° made of PE-HD, ø 50 mm
- 2 protection plugs
- Fastening material

Art. no.	DN	d, ø [mm]	Rp ["]	AD [cm]	AD1 [cm]	L [cm]	L2 [cm]	I [cm]	I1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.2 cm														
602.783.00.5	15	20	1/2	15.3	7.3	59.7	5.5	25.3	4	2.7	60	5	1	64.97

Geberit elbow tap connector 90° with male thread MF 1/2", premounted, single, short

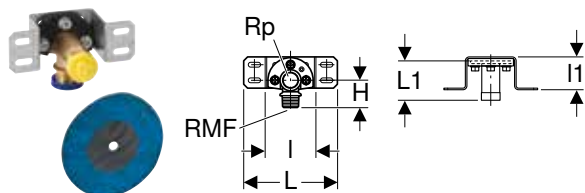

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Self-adhesive sealing washer, fleece-laminated
- Sound-absorbing
- Male thread MF 1/2" compatible with MasterFix and MeplaFix
- MF 1/2" connection with blue protective cap
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

Scope of delivery

- Sealing washer
- Protection plug
- Fastening material

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	RMF ["]	Rp ["]	L [cm]	l [cm]	l1 [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
L1 / length: 5.7 cm										
632.856.00.1	15	1/2	1/2	12	6.5	4	3.5	10	1	43.00

Geberit Mepla elbow tap connector 90° for concealed cistern



Application purposes

- For potable water
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Fastening flange for Sigma concealed cisterns 8 cm
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	Z [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.277.00.6	12	16	1/2	5.8	2.8	3.2	25	5	19.51
612.277.00.6	15	20	1/2	6.1	2.8	3.2	25	5	19.51



Geberit Mepla elbow tap connector 90° for concealed cistern



Application purposes

- For potable water
- For technical building systems, industry and shipbuilding
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- Fastening flange for Twinline concealed cisterns 8 cm
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Scope of delivery

- Knurled nut M35 x 1.5

Art. no.	DN	d, ø [mm]	Rp ["]	L [cm]	L1 [cm]	I [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.276.00.5	12	16	1/2	5.8	3.8	2.8	3.2	1600	50	10	1	24.33
602.276.00.5	15	20	1/2	6.1	3.8	2.8	3.2		50	10	1	24.33

Manifolds with threaded connection

Geberit manifold with threaded connection and connection nipple for manifold, for Euro cone

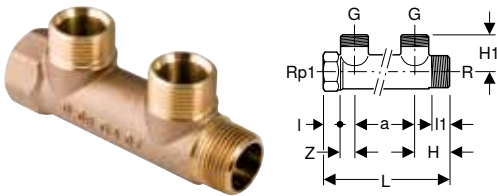

Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337

Characteristics

- Connection nipple for manifold, with Euro cone G 3/4"

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------


Art. no.	DN	R ["]	G ["]	Rp1 ["]	a [cm]	L [cm]	I [cm]	l1 [cm]	H [cm]	H1 [cm]	Z [cm]	Number of outlets	SU2 [pc.]	SU1 [pc.]	GBP/pc.
602.422.00.1	20 / 15 / 20	3/4	3/4	3/4	5	10.9	1.5	1.5	3.2	3.2	1.3	2	5	1	44.29
602.423.00.1	20 / 15 / 20	3/4	3/4	3/4	5	16	1.5	1.5	3.2	3.2	1.3	3	5	1	59.92



- Fastening with Geberit pipe bracket, insulated (art. no. 601.853.26.1)

New

Geberit stepped bend with male thread



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263

Characteristics

- Male thread


Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	R ["]	A [cm]	H [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
653.478.00.1	20	3/4	2	6.6	30	25	5	1	36.19

Available as of April 2023

Geberit cap with female thread



Application purposes


- For technical building systems, industry and shipbuilding
- For permanently closing Geberit manifolds with threaded connection
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	Rp ["]	L [cm]	I [cm]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
602.482.00.1	20	3/4	2.1	1.5	34	25	5	7.50

Geberit plug with male thread



Application purposes


- For technical building systems, industry and shipbuilding
- For permanently closing Geberit manifolds with threaded connection
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit PushFit
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	R ["]	I [cm]	H [cm]	SW [mm]	SU2 [pc.]	GBP/pc.
602.480.00.1	20	3/4	1.5	2.6	27	5	8.09

Geberit Mepla union connector for Euro cone



Application purposes

- For Geberit Mepla system pipes, ML
- Application overview – Geberit Mepla → p. 337

Characteristics

- Clamping ring union
- Union nut made of brass, nickel-plated
- O-ring made of EPDM

Technical data

Product material	Brass CW617N
------------------	--------------

Scope of delivery

- Set of 2 pieces

Art. no.	DN	d, ø [mm]	G ["]	SW [mm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
641.534.22.2	12 / 20	16	3/4	27	50	10	2	4.59
642.534.22.2	15 / 20	20	3/4	27	50	10	2	4.59




- Tighten with a torque of 35–40 Nm



T-pieces for heating

Geberit Mepla T-piece crossing with insulation box

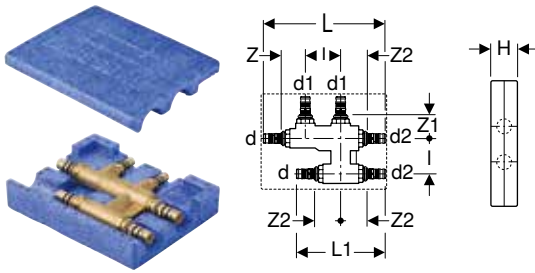

Application purposes

- For connecting to two parallel pipes without intersecting
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Characteristics

- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Technical data

Product material	Brass CW617N
Material, insulation	EPP
Insulation thickness	8.5 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	l [cm]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.319.00.5	12 / 12 / 12	16	16	16	17.1	12.5	5	5	3.3	3.3	3.7	200	10	1	55.98
612.316.00.5	15 / 12 / 12	20	16	16	17.3	12.7	5	5	3.3	3.3	3.7	200	10	1	55.98
612.315.00.5	15 / 12 / 15	20	16	20	17.5	12.9	5	5	3.3	3.3	3.7	200	10	1	55.98
612.319.00.5	15 / 15 / 15	20	20	20	17.8	13.2	5	5	3.3	3.3	3.7	200	10	1	55.98
613.312.00.5	20 / 12 / 15	26	16	20	18.2	13.2	5	5	3.6	3.3	3.6		10	1	63.08
613.314.00.5	20 / 12 / 20	26	16	26	18.6	13.6	5	5	3.6	3.3	3.6	200	10	1	63.08
613.313.00.5	20 / 15 / 20	26	20	26	18.6	13.6	5	5	3.6	3.3	3.6	200	10	1	63.08

Connections for heating

Geberit Mepla connector box type T

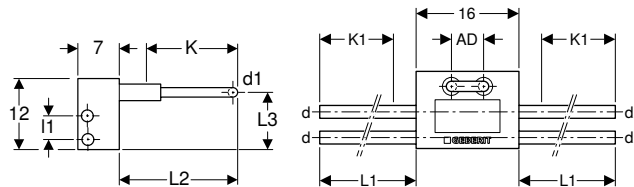

Application purposes

- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Characteristics

- System pipe forms a barrier against diffusion
- System pipe, white exterior
- For pressure test without radiator

Technical data


Product material	PE-RT II / AI / PE-RT II
Material, insulation	PUR
Insulation thickness	6 mm
Thermal conductivity, insulation	0.03 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	AD [cm]	L1 [cm]	L2 [cm]	L3 [cm]	I1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
612.265.00.1	15 / 12 / 15	20	16	20	5	30	20	8	4	16.5	26	80	10	163.87

Accessories

- Geberit Mepla union connector for Euro cone → p. 367

Geberit Mepla connector box type C

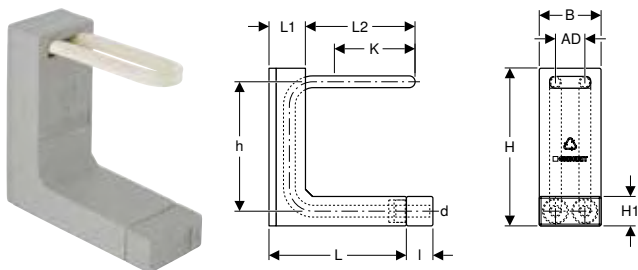

Application purposes

- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Characteristics

- System pipe forms a barrier against diffusion
- System pipe, white exterior
- For pressure test without radiator

Technical data


Product material	PE-RT II / Al / PE-RT II
Material, insulation	EPS
Insulation thickness	13 mm
Thermal conductivity, insulation	0.031 W/(m·K)

Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	I [cm]	B [cm]	H [cm]	H1 [cm]	h [cm]	K [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.260.00.1	12	16	5	21	5	19	4.5	10.5	27	5	22	15.5	80	10	1	30.31
612.260.00.1	15	20	5	22.3	6.3	18.5	4.5	10.5	27	5	22	15	80	10	1	32.17

Accessories

- Geberit Mepla union connector for Euro cone → p. 367

Geberit Mepla connector box type L

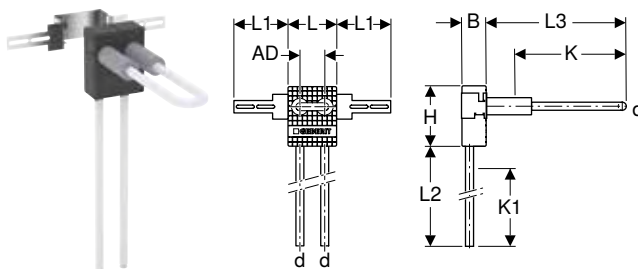

Application purposes

- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Characteristics

- System pipe forms a barrier against diffusion
- System pipe, white exterior
- For pressure test without radiator

Technical data

Product material	PE-RT II / Al / PE-RT II
Material, insulation	PUR
Insulation thickness	7 mm
Thermal conductivity, insulation	0.038 W/(m·K)

Scope of delivery

- Installation sheet


Art. no.	DN	d, ø [mm]	AD [cm]	L [cm]	L1 [cm]	L2 [cm]	L3 [cm]	B [cm]	H [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.263.00.1	12	16	5	10	11	35	25	5	12	21.5	32	80	10	1	36.45

Accessories

- Geberit Mepla union connector for Euro cone → p. 367



Geberit Mepla metal pipe connector bend 90° with insulation box and union connector for Euro cone

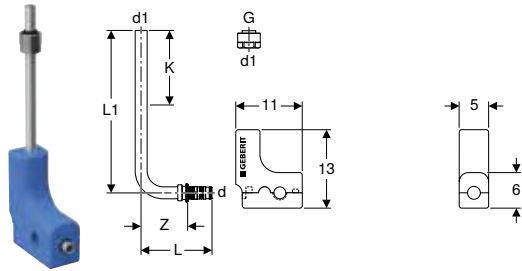

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Leaky if unpressed
- Nickel-plated
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Two-piece insulation box

Scope of delivery


- Metal pipe connector bend 90°, made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	L [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
L1 / length: 30 cm										
611.250.22.7	12 / 20	16	3/4	15	9.1	6.6	17	20	2	42.33
612.250.22.7	15 / 20	20	3/4	15	9.3	6.6	17	20	2	44.22
L1 / length: 100 cm										
611.251.22.7	12 / 20	16	3/4	15	9.1	6.6	87		2	68.75
612.251.22.7	15 / 20	20	3/4	15	9.3	6.6	87		2	72.28



- Tighten the union as far as it will go

Geberit Mepla metal pipe connector T-piece with insulation box and union connector for Euro cone

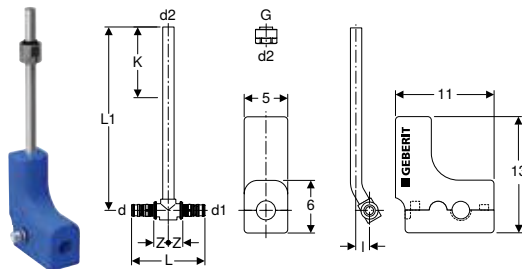

Application purposes

- For connecting radiator valves
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Brass / copper
Material, insulation	EPP
Insulation thickness	7.5 mm
Thermal conductivity, insulation	0.04 W/(m·K)

Characteristics

- Leaky if unpressed
- Nickel-plated
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Two-piece insulation box

Scope of delivery


- Metal pipe connection T-piece made of brass / copper
- Union connector for Euro cone G 3/4"
- Insulation box made of EPP

Art. no.	DN	d, ø [mm]	G ["]	d1, ø [mm]	d2, ø [mm]	L [cm]	L1 [cm]	I [cm]	Z [cm]	K [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.360.22.7	12 / 20 / 12	16	3/4	16	15	8.4	30	2.5	1.7	17	20	2	51.80
612.362.22.7	15 / 20 / 15	20	3/4	20	15	8.4	30	2.5	1.7	17	20	2	51.80



- Tighten the union as far as it will go

Geberit Mepla set of connector T-pieces for inlet and return flow, with union connector for Euro cone

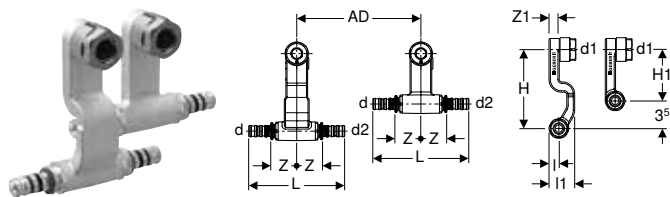

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics

- Leaky if unpressed
- Inlet and return flow exchangeable
- Nickel-plated
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Installation completely in front of the wall


Scope of delivery

- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	AD [cm]	L [cm]	I [cm]	I1 [cm]	H [cm]	H1 [cm]	Z [cm]	Z1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.361.22.7	12	16	15	16	5	11.9	1.3	3.3	10	6.5	3.4	1.5	10	1	81.16
612.361.22.7	15 / 12 / 15	20	15	20	5	12.4	1.3	3.3	10	6.5	3.4	1.5	10	1	84.83

- i** • Tighten the union as far as it will go

Geberit Mepla set of connector end pieces for inlet and return flow, with union connector for Euro cone

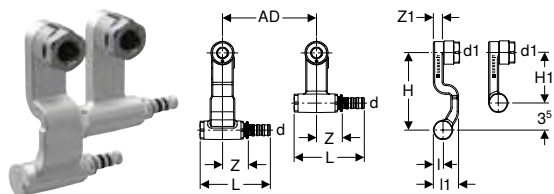

Application purposes

- For skirting board systems
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics

- Leaky if unpressed
- Inlet and return flow exchangeable
- Nickel-plated
- O-ring made of EPDM
- Pressing nipple with transparent protective cap
- Installation completely in front of the wall

Scope of delivery


- Connector T-piece with short connection
- Connector T-piece with long connection
- 2 union connectors for Euro cone G 3/4"

Art. no.	DN	d, ø [mm]	d1, ø [mm]	AD [cm]	L [cm]	I [cm]	I1 [cm]	H [cm]	H1 [cm]	Z [cm]	Z1 [cm]	Connection	SU1 [pc.]	GBP/pc.
611.363.22.7	12	16	15	5	8.9	1.3	3.3	10	6.5	3.4	1.5	left	1	81.16
611.364.22.7	12	16	15	5	8.9	1.3	3.3	10	6.5	3.4	1.5	right	1	81.16

- i** • Tighten the union as far as it will go



Geberit metal pipe bend with plain ends 90° with union connector for Euro cone

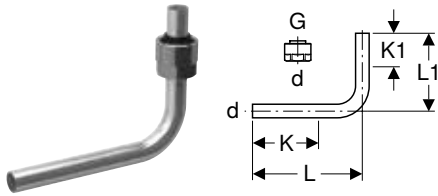

Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data


Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.601.22.3	12 / 20	15	3/4	13	10	7.5	4.5	20	2	7.39



- Tighten the union as far as it will go

Geberit metal pipe elbow 90°, lockable, with union connector for Euro cone

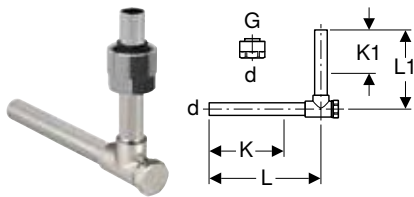

Application purposes

- For connecting radiator valves
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177

Characteristics

- Nickel-plated

Scope of delivery

- Union connector for Euro cone G 3/4"

Technical data


Product material	Brass / copper
------------------	----------------

Art. no.	DN	d, ø [mm]	G ["]	L [cm]	L1 [cm]	K [cm]	K1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.603.22.3	12 / 20	15	3/4	12.5	10	8	5.5	50	10	2	24.07



- Tighten the union as far as it will go

Geberit Mepla union connector for Euro cone



Application purposes

- For Geberit Mepla system pipes, ML
- Application overview – Geberit Mepla → p. 337

Characteristics

- Clamping ring union
- Union nut made of brass, nickel-plated
- O-ring made of EPDM

Technical data

Product material	Brass CW617N
------------------	--------------

Scope of delivery


- Set of 2 pieces

Art. no.	DN	d, ø [mm]	G ["]	SW [mm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
641.534.22.2	12 / 20	16	3/4	27	50	10	2	4.59
642.534.22.2	15 / 20	20	3/4	27	50	10	2	4.59



- Tighten with a torque of 35–40 Nm

Geberit Mepla union connector with male thread



Application purposes

- For Geberit Mepla system pipes, ML
- For connecting to radiator valves Danfoss with female thread G 1/2"
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Characteristics

- Clamping ring union
- Threaded nipple made of brass, nickel-plated
- O-ring made of EPDM

Scope of delivery

- Set of 2 pieces

Technical data


Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	G ["]	SW [mm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
641.513.00.1	12	16	1/2	22	50	10	2	4.69



- Tighten the union as far as it will go

Geberit Mepla union connector with male thread



Application purposes

- For Geberit Mepla system pipes, ML
- For connecting to radiator valves Heimeier with female thread G 1/2"
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Technical data


Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	G ["]	SW [mm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
641.515.00.1	12	16	1/2	22	50	10	2	4.93



- Tighten the union as far as it will go

Geberit Mepla union connector with male thread



Application purposes

- For Geberit Mepla system pipes, ML
- For connecting to radiator valves Herz with female thread G 1/2" in accordance with EN 215, construction dimension series D
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Characteristics

- Clamping ring union
- Threaded nipple made of brass, nickel-plated
- O-ring made of EPDM

Scope of delivery

- Set of 2 pieces

Technical data


Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	G ["]	SW [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
641.516.22.1	12	16	1/2	22	10	2	4.69



- Tighten the union as far as it will go

Geberit Mepla union connector with female thread



Application purposes

- For Geberit Mepla system pipes, ML
- For connecting to radiator valves Herz with male thread M22 x 1.5
- Exclusively suitable for heating and cooling
- Application overview – Geberit Mepla → p. 337

Characteristics

- Clamping ring union
- Union nut made of brass, nickel-plated
- O-ring made of EPDM

Scope of delivery

- Set of 2 pieces

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	DN	d, ø [mm]	M [mm]	SW [mm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
641.514.00.1	12	16	22 x 1.5	27	50	10	2	4.69




- Tighten the union as far as it will go

Accessories

Insulations for pipes and fittings

Geberit insulation hose



Application purposes

- For protecting pipes against the formation of condensation, heat loss and sound transmission

Characteristics

- Closed-cell insulation, red protective foil


Technical data

Material, insulation	PE soft foam
Thermal conductivity, insulation	0.04 W/(m·K)

Art. no.	d, \emptyset [mm]	da [mm]	di, \emptyset [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
601.800.00.1	16	30	18	6	2	160	2	4.54
602.800.00.1	20	34	22	6	2	120	2	5.00
603.800.00.1	26	40	28	6	2	100	2	5.24

Insulations for connectors

Geberit sound insulation set for single elbow tap connector 90°

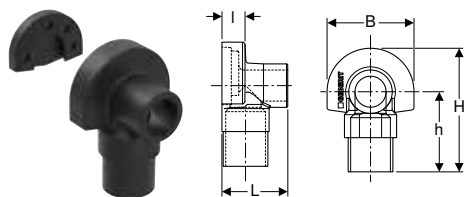

Application purposes

- For Geberit elbow tap connector with female thread Rp 1/2" and Rp 3/4"

Characteristics

- Black

Scope of delivery

- Sound insulation cap
- Sound insulation base

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Product material	EPDM

Art. no.	L [cm]	I [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.801.00.1	5.3	1.9	7	10	6.5	800	100	50	1	4.39

Accessories

- Geberit FlowFit connection bend 90° → p. 294

Geberit sound insulation base for tap connector, straight



Application purposes

- For Geberit tap connector, straight, with female thread Rp 1/2"

Characteristics

- Black


Technical data

Product material	EPDM
------------------	------

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.802.00.1	100	10	1.16



Geberit sound insulation set for double elbow tap connector 90°

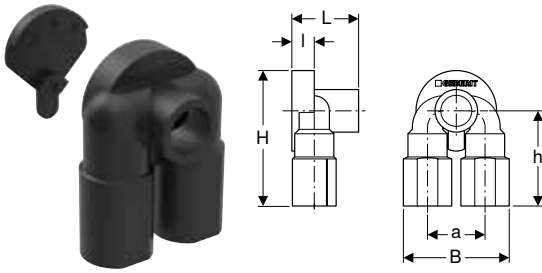

Application purposes

- For Geberit double elbow tap connector with female thread Rp 1/2"

Technical data

Noise reduction at 3 bar flow pressure	12 dB(A)
Product material	EPDM

Characteristics

- Black


Scope of delivery

- Sound insulation cap
- Sound insulation base

Art. no.	a [cm]	L [cm]	l [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.805.00.1	5	5.3	2	9.2	11.6	8.1	50	10	1	15.71

Caulks for pipes and fittings

Geberit sealing tape



Application purposes

- For protecting the pipe cross-sections of Geberit FlowFit against external corrosion factors
- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors
- For protecting Geberit Mapress system pipes and fittings against external corrosion factors

Characteristics

- UV-resistant
- Black

Technical data


Installation temperature	-10 – +50 °C
Temperature resistance	-60 – +100 °C
Product material	IIR

Art. no.	s [mm]	L [m]	B [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
601.813.00.1	1	12.5	3	6	1	45.96
601.815.00.1	1	12.5	5	5	1	76.56



- Attach after pressure test

Geberit Mepla sleeve



Application purposes

- For protecting the pipe cross-sections of Geberit Mepla against external corrosion factors

Characteristics

- Black


Technical data

Product material	EPDM
------------------	------

Art. no.	da [mm]	di, ø [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.811.00.1	19	16	2	100	10	3.17
602.811.00.1	23	20	2.1	100	10	0.60
603.811.00.1	29	26	2.3	100	10	3.89

Caulks for connections

Geberit sealing washer for connections

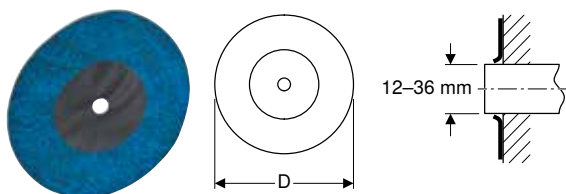

Application purposes

- For sealing Geberit connections
- For later mounting on connections with smooth surface


Characteristics

- Self-adhesive
- Fleece-laminated
- Sealing diaphragm made of PUR

Art. no.	D [cm]	s [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.812.00.1	15	1	100	10	1	2.92

Pipe covers

Geberit pipe sleeve, slit



Application purposes

- For cladding visible pipes

Characteristics

- Pure white RAL 9010

Technical data

Product material	PP
------------------	----

Art. no.	di, \emptyset [mm]	L [m]	SU2 [m]	GBP/m
611.605.BM.1	15-20	1	5	3.30

Geberit double collar



Application purposes

- For covering pipe feed-throughs

Characteristics

- Two-piece
- Pure white RAL 9010


Technical data

Product material	PS
------------------	----

Art. no.	a [cm]	di, \emptyset [mm]	L [cm]	B [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
611.610.BM.1	5	14 / 15 / 16 / 18 / 20	10	5	100	10	1.64

Pipe fastenings

Geberit single-pipe clip



Application purposes

- For fastening Geberit system pipes

Characteristics


- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	di, \emptyset [mm]	m [mm]	SU2 [pc.]	GBP/pc.
601.763.00.1	16	6.2	100	0.33
602.763.00.1	20	6.2	100	0.47
601.761.00.1	22	6.2	100	0.26
602.761.00.1	28	6.2	100	0.46

Geberit double pipe-clip



Application purposes

- For fastening Geberit system pipes

Characteristics


- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	di, \emptyset [mm]	m [mm]	SU2 [pc.]	GBP/pc.
602.762.26.1	28	6.2	50	0.71

Geberit pipe clamp with hammer fixing, single



Application purposes

- For fastening Geberit system pipes

Characteristics


- Nail made of steel, zinc-plated

Technical data

Product material	Plastic
------------------	---------

Art. no.	di, \emptyset [mm]	SU3 [pc.]	GBP/pc.
601.710.00.1	15-16	100	1.62
602.710.00.1	20-22	100	1.80
603.710.00.1	25-28	100	2.07

Geberit pipe bracket lining shell



Application purposes

- For sliding bracket fastening of Geberit system pipes ML for Geberit FlowFit
- For anchor point or sliding bracket fastening of Geberit Mepla system pipes, ML

Characteristics


- Two-piece
- Black

Technical data

Product material	PP-C
------------------	------

Art. no.	da [mm]	di, \emptyset [mm]	D [cm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
603.702.00.1	32	25 / 26	3.4	3.2	2.5	10		2.89
604.702.00.1	40	32	4.9	3.2	2.5	10		2.89
605.702.00.1	50	40	5.7	3.3	2.5	10		3.98
606.702.00.1	63	50	7.6	3.4	2.5	10		4.74
607.702.00.1	75	63	9.1	4.8	3		1	7.49
608.702.00.1	90	75	10.7	5	3	2		28.03

Geberit pipe bracket, insulated, with threaded socket M8 / M10

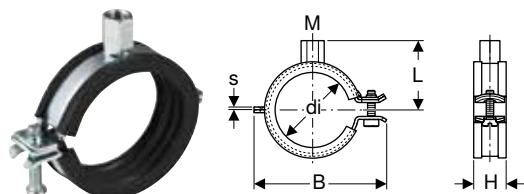

Application purposes

- For fastening Geberit system pipes for supply systems

Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated


Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	M [mm]	di, \emptyset [mm]	s [mm]	L [cm]	B [cm]	H [cm]	SU2 [pc.]	GBP/pc.
601.851.26.1	galvanized	8 / 10	15-19	1.5	3.1	5.2	2.3	50	2.13
601.852.26.1	galvanized	8 / 10	20-24	1.5	3.4	5.6	2.3	50	2.13
601.853.26.1	galvanized	8 / 10	25-30	1.5	3.6	6.3	2.3	50	2.29
601.854.26.1	galvanized	8 / 10	32-37	1.5	3.9	6.8	2.3	50	2.46
601.855.26.1	galvanized	8 / 10	40-46	2	4.3	7.6	2.3	50	2.64
601.856.26.1	galvanized	8 / 10	48-53	2	4.5	8.2	2.3	50	2.82
601.858.26.1	galvanized	8 / 10	63-67	2	5.5	10	2.3	50	4.22



Geberit support shell, zinc-plated and coated



Application purposes

- For stabilising Geberit fastening systems

Characteristics


- Coated
- Steel, black coated exterior
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	di, \emptyset [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
360.850.00.1	coated	40	40	0.75	3	30	3	11.19
361.850.00.1	coated	50	50	0.75	3	30	3	12.52
364.850.00.1	coated	60	63	0.75	3	30	3	16.88
365.850.00.1	coated	70	75	0.75	3	30	3	17.06

Geberit double nipple M10 / G 1/2"



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Reduced
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.71

Geberit threaded pipe



Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

Characteristics


- Female thread continuously threaded
- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [m]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	1.15	2	1	35.02

Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10



Application purposes

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

Characteristics


- Female thread
- Zinc-plated
- Two fastening points

Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.37

Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"

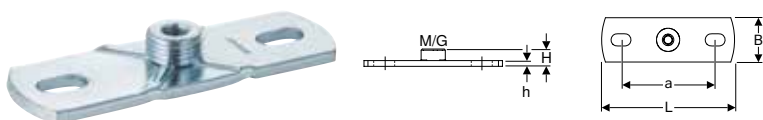

Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

Characteristics

- Male thread
- Female thread
- Zinc-plated
- Two fastening points


Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	3.92

Connector fastenings

Geberit mounting plate, straight, single



Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data


Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.736.00.1	40	5	4.17

Geberit mounting plate, straight, double, connecting distance 10 cm or 12 cm

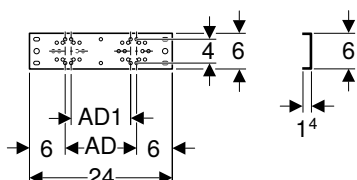

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.738.00.1	12	10	50	5	9.99

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit mounting plate, straight, double, connecting distance 7.3 cm or 15.3 cm

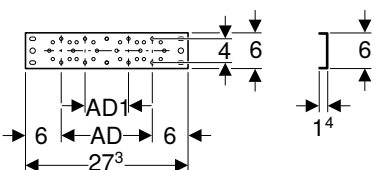

Application purposes

- For fastening Geberit connections for supply systems

Characteristics

- Zinc-plated

Technical data

Product material	Steel
------------------	-------

Scope of delivery

- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.737.00.1	15.3	7.3	1500	50	5	5.55

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107



Geberit mounting plate, offset, single



Application purposes

- For fastening Geberit connections for supply systems

Technical data

Product material	Steel
------------------	-------

Characteristics


- Zinc-plated

Scope of delivery

- Fastening material

Art. no.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
601.733.00.1	400	25	5	6.08

Geberit mounting plate, offset, double, connecting distance 10 cm or 12 cm

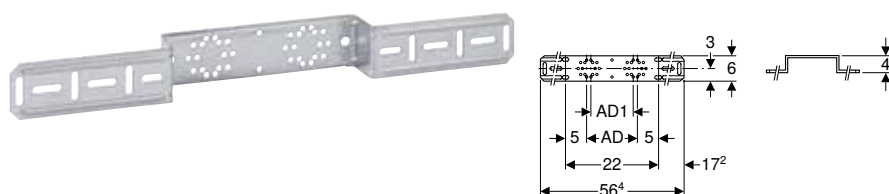

Application purposes

- For fastening Geberit connections for supply systems

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated

Scope of delivery


- Fastening material

Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.731.00.1	12	10	420	5	7.13

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

Geberit mounting plate, offset, double, connecting distance 7.3 cm or 15.3 cm

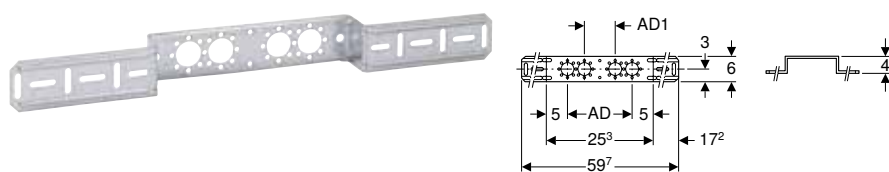

Application purposes

- For fastening Geberit connections for supply systems

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated

Scope of delivery

- Fastening material


Art. no.	AD [cm]	AD1 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
601.732.00.1	15.3	7.3	420	5	6.33

Accessories

- Geberit drain pipe bracket for mounting plates → p. 107

New

Geberit mounting plate, offset, double, connecting distance 15.3 cm

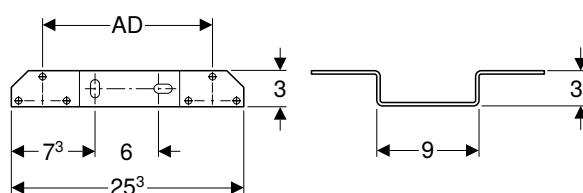

Application purposes

- For fastening Geberit connections for supply systems

Technical data

Product material	Steel
------------------	-------

Characteristics

- Zinc-plated


Scope of delivery

- Fastening material

Art. no.	AD [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.742.00.1	15.3	5	1	7.68

Available as of April 2023

Geberit drain pipe bracket for mounting plates

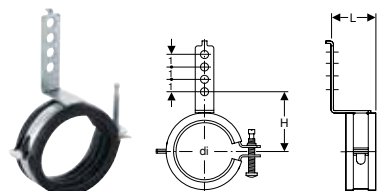

Technical data

Product material	Steel
------------------	-------

Scope of delivery


- Fastening material

Characteristics

- Sound-absorbing
- Zinc-plated

Art. no.	di, ø [mm]	L [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.741.00.1	50-56	3.6	5.2-5.5	25	5	1	4.08

Geberit mounting aid set for straight connector, for drywall construction



Technical data

Product material	Steel / plastic
------------------	-----------------

Scope of delivery

- Stud bolt G 1/2"
- Protection box

Characteristics

- Reusable

Art. no.	G ["]	SU2 [pc.]	GBP/pc.
601.744.00.1	1/2	2	14.05



System seals

Geberit Mepla set of O-rings with washers



Application purposes

- For technical building systems, industry and shipbuilding
- For Geberit Mepla pressing nipples
- Application overview – Geberit Mepla → p. 337

Scope of delivery


- Set of 2 pieces

Characteristics

- O-ring made of EPDM
- Flat washer made of PE-LD

Art. no.	DN	d, \emptyset [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.910.00.5	12	16	25	5	1	1.81
602.910.00.5	15	20	25	5	1	1.81
603.910.00.5	20	26	25	5	1	1.81
604.910.00.5	25	32		10	1	1.81
605.910.00.5	32	40		10	1	4.14
606.910.00.5	40	50		10	1	7.35
607.910.00.5	50	63		10	1	8.47
608.910.00.5	65	75		10	1	15.68

Geberit flat gasket Centellen® R WS 3825



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Volex
- Application overview – Geberit PushFit

Technical data

Operating temperature	-30 – +150 °C
Product material	Centellen® R WS 3825

Art. no.	G ["]	da [mm]	di, \emptyset [mm]	s [mm]	SU2 [pc.]	GBP/pc.
242.976.00.1	3/8	15	10	2	5	2.29
242.319.00.1	1/2	19	11	2	10	2.24
242.323.00.1	1	30	21	2	10	2.24
242.324.00.1	1 1/8	34	24	2	10	2.24
242.325.00.1	1 1/4	38	27	2	10	2.24
242.326.00.1	1 1/2	45	32	2	5	2.24
242.327.00.1	1 3/4	49	36	2	5	2.24
242.329.00.1	2	57	42	2	5	3.35
242.330.00.1	2 1/4	62	42	2	5	6.73
242.331.00.1	2 3/8	66	52	2	5	7.88
242.332.00.1	2 1/2	72	54	2	5	9.70
242.333.00.1	2 3/4	78	63	2	5	13.49

Geberit flange gasket PN 6



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241

Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, Ø [mm]	s [mm]	PN [bar]	SU1 [pc.]	GBP/pc.
91047	65	116	76	2	6	1	6.49

Geberit flange gasket PN 10/16



Application purposes

- For technical building systems, industry and shipbuilding
- Application overview – Geberit FlowFit → p. 263
- Application overview – Geberit Mepla → p. 337
- Application overview – Geberit Mapress Stainless Steel for liquid media → p. 11
- Application overview – Geberit Mapress Stainless Steel for gaseous media → p. 13
- Application overview – Geberit Mapress Carbon Steel → p. 119
- Application overview – Geberit Mapress Copper → p. 177
- Application overview – Geberit Mapress CuNiFe → p. 241


Technical data

Operating temperature	-30 – +180 °C
Product material	Centellen® HD WS 3822

Art. no.	DN	da [mm]	di, Ø [mm]	s [mm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
91037	65	127	76	2	10 / 16	5	1	5.10

Sets of bolts for flange connections

Geberit bolt set for flange connection, made of zinc-plated steel



Application purposes

- For flanges made of carbon steel, gunmetal and brass

Technical data

Product material	Steel
------------------	-------

Characteristics


- Zinc-plated
- Strength class 8.8, EN 20898-2

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91066	12	14	5	3	4	2.49
91067	12	14	5.5	3.5	4	2.49
91068	12	14	6	4	4	2.49

Geberit bolt set for flange connection, made of CrNi steel



Application purposes

- For flanges made of stainless steel, gunmetal and brass

Characteristics

- Steel type A2, strength class 70, EN ISO 3506-1

Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Scope of delivery

- Bolt
- 2 washers
- Nut

Art. no.	M [mm]	m [mm]	L [cm]	IK [cm]	SU2 [pc.]	GBP/pc.
91169	16	18	5.5	3.3	4	2.79
91170	16	18	6	3.8	4	2.79
91171	16	18	6.5	4.3	4	2.79
91172	16	18	7	4.8	4	2.79
91173	16	18	8	5.8	4	2.79





Pipe Valve Fittings


Straight-seat valves	390
With Mepla pressing connections	390
With Mapress pressing connections	390
Straight-seat valves for concealed installation	391
With Mepla pressing connections	391
With Mapress pressing connections	392
With threaded connections	392
Angle-seat valves	393
With FlowFit pressing connections	393
With Mepla pressing connections	394
With Mapress pressing connections	395
Emptying valves	396
Ball valves	396
With FlowFit pressing connections	396
With Mepla pressing connections	397
With Mapress pressing connections	399
With Mapress pressing connections, FKM, blue	404
Ball valves for concealed installation	405
With FlowFit pressing connections	405
With Mepla pressing connections	406
With Compact connections	407
With Mapress pressing connections	408
Non-return valves	408
With Mapress pressing connections	408



Straight-seat valves

With Mepla pressing connections

Geberit emptying valve



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent

Characteristics

- Screw cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	G ["]	L [cm]	L1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.576.00.1	8	1/4	4.5	3.5	5	1	19.88

Geberit set of marking discs, red




Scope of delivery

- 20 pieces, \varnothing 25 mm
- 20 pieces, \varnothing 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	7.64

With Mapress pressing connections

Geberit Mapress straight-seat stop valve



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of brass
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- \varnothing 22 mm with connection for emptying valve G 1/4", closed
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	0–95 °C
-----------------------	---------

Art. no.	DN	DNV	d, \varnothing [mm]	D [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94862	12	15	15	6	13	10.5	4.5	16	1	70.15
94863	15	15	18	6	13.2	10.5	4.6	16	1	74.05
94864	20	20	22	6	14.2	10.9	5	16	1	85.74
94865	25	25	28	7	15.8	13.7	5.6	16	1	109.13
94866	32	32	35	7	17.2	16.2	6	16	1	140.26

Accessories

- Geberit set of marking discs, red → p. 390

Geberit emptying valve



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent

Characteristics

- Screw cap

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	G ["]	L [cm]	L1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.576.00.1	8	1/4	4.5	3.5	5	1	19.88

Geberit set of marking discs, red




Scope of delivery

- 20 pieces, ø 25 mm
- 20 pieces, ø 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	7.64

Straight-seat valves for concealed installation With Mepla pressing connections

Geberit turn handle set for concealed stop valve



Characteristics

- Chrome-plated

Scope of delivery


- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	32.91



With Mapress pressing connections

Geberit Mapress concealed stop valve with cover collar

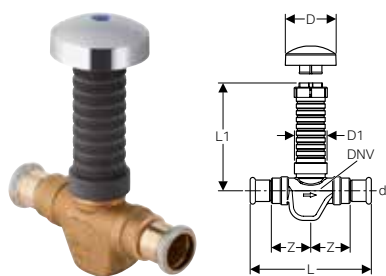

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent

Technical data

Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics


- Valve top fully exposed to flow
- Maintenance-free spindle seal
- Replaceable upper part
- Protection box can be cut to length
- Valve and upper part seals made of EPDM
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery

- Cover collar, chrome-plated
- Colour markings (red, blue)

Art. no.	DN	DNV	d, ø [mm]	D [cm]	D1 [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94902	12	15	15	7	3.9	14	11	4.9	16	1	116.09
94903	15	15	18	7	3.9	14	11	55	16	1	127.71
94904	20	20	22	7	3.9	14.5	11	55	16	1	127.71
94905	25	25	28	7	4.6	18	11.5	6.8	16	1	186.34

Geberit turn handle set for concealed stop valve



Characteristics

- Chrome-plated


Scope of delivery

- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	32.91

With threaded connections

Geberit turn handle set for concealed stop valve



Characteristics

- Chrome-plated

Scope of delivery

- Turn handle, chrome-plated
- Cover collar, chrome-plated
- Retainer with slip-on spindle and transition bushing
- Colour markings (red, blue)


Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
461.082.00.1	15 / 20 / 25	10	1	32.91

Angle-seat valves

With FlowFit pressing connections

New

Geberit FlowFit angle-seat stop valve



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Technical data

Product material	Lead-free gunmetal (CuSn4Zn2PS)
------------------	---------------------------------

Scope of delivery

- Hand wheel

Characteristics

- Valve top fully exposed to flow
- Valve body made of lead-free gunmetal
- Upper part made of lead-free gunmetal
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve 1/4", closed
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	DN	DNV	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.830.00.1	12	15	16	6	14	1.8	10.2	2.6	5.4	10	10	1	64.09
619.831.00.1	15	15	20	6	14	1.8	10.2	2.6	5.4	10	10	1	66.88
619.832.00.1	20	20	25	6	15.4	0.5	10.5	2.4	7	10	10	1	84.41
619.833.00.1	25	25	32	7	17.3	2.9	13.5	3.4	7.4	10	10	1	104.72
619.834.00.1	32	32	40	7	19.3	3.3	15.6	3.7	9	10	5	1	157.22
619.835.00.1	40	40	50	7	24	0.6	16.4	3.2	10.2	10	5	1	206.62

Available as of April 2023


Accessories

- Geberit set of marking discs, red → p. 390



With Mepla pressing connections

Geberit Mepla angle-seat stop valve



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Technical data

Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of lead-free gunmetal
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve 1/4", closed
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Art. no.	DN	DNV	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
602.032.00.1	15	15	20	6	12.7	3.3	9.5	2.1	4.9	10	10	1	80.73
603.032.00.1	20	20	26	6	14.7	2.6	10.2	2.2	5.9	10	10	1	92.26
604.032.00.1	25	25	32	7	15.4	5.6	13.2	2.6	6.9	10	10	1	115.29
605.032.00.1	32	32	40	7	18.6	6.8	15	3.2	8.4	10	5	1	165.28
606.032.00.1	40	40	50	7	19.6	6.2	16	2.3	9.3	10	5	1	270.40

Accessories

- Geberit set of marking discs, red → p. 390

Geberit set of marking discs, red




Scope of delivery

- 20 pieces, ø 25 mm
- 20 pieces, ø 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	7.64

With Mapress pressing connections

Geberit Mapress angle-seat stop valve



Application purposes

- For cold and hot potable water
- For cold potable water up to 16 bar / 1600 kPa operating pressure
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For compressed air up to 6 bar / 600 kPa operating pressure

Technical data

Operating temperature	0–95 °C
Product material	Gunmetal (CuSn5Zn5Pb2-C)

Characteristics

- Valve top fully exposed to flow
- Valve body made of gunmetal
- Upper part made of lead-free gunmetal
- Maintenance-free spindle seal with self-lubricating lip seal made of EPDM
- Valve and upper part seals made of EPDM
- Valve seat made of stainless steel
- Connection for emptying valve 1/4", closed
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	DNV	d, ø [mm]	D [cm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94882	12	15	15	6	9.4	3.7	9	1.5	3.9	16	1	77.96
94883	15	15	18	6	9.5	3.3	9	1.1	4.5	16	1	81.85
94884	20	20	22	6	10.9	3.2	10.5	2.2	4.5	16	1	93.50
94885	25	25	28	7	13	4.4	13.2	2.1	6.3	16	1	116.91
94886	32	32	35	7	15.1	5.6	15.4	2.9	7	16	1	148.10
94887	40	40	42	7	17.8	4.3	16.2	3	8.8	16	1	202.62
94888	50	50	54	9	21.4	5.5	19.3	4.4	10	16	1	245.49

Accessories

- Geberit set of marking discs, red → p. 390

Geberit set of marking discs, red



Scope of delivery


- 20 pieces, ø 25 mm
- 20 pieces, ø 35 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.577.00.1	10	1	7.64



Emptying valves

Geberit emptying valve



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent

Characteristics

- Screw cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Art. no.	DN	G ["]	L [cm]	L1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
241.576.00.1	8	1/4	4.5	3.5	5	1	19.88

Ball valves

With FlowFit pressing connections

Geberit FlowFit ball valve with actuator lever

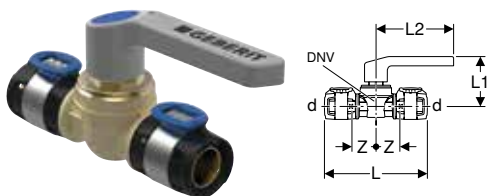

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Lead-free
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------


Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.850.00.1	12	8	16	11.9	5.8	9.2	2.7	10	10	1	38.75
619.851.00.1	15	15	20	12.1	5.9	9.2	2.8	10	10	1	42.37
619.852.00.1	20	15	25	12.2	5.9	9.2	2.8	10	10	1	49.83
619.853.00.1	25	20	32	13.4	6.2	9.2	3.1	10	10	1	69.19
619.854.00.1	32	25	40	14.4	7.1	12.4	3.6	10	10	1	109.07
619.855.00.1	40	32	50	20.9	7.6	12.4	4.5	10	5	1	177.26

With Mepla pressing connections

Geberit Mepla ball valve with actuator lever

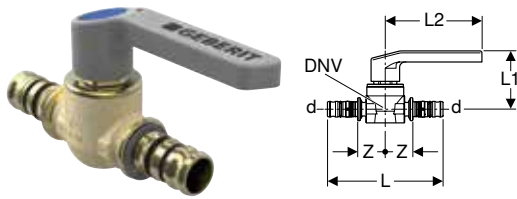

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics


- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.061.00.2	12	8	16	10.1	6	9.5	2.4	10	10	1	36.37
612.061.00.2	15	15	20	10.6	6	9.5	2.5	10	10	1	36.67
613.061.00.2	20	15	26	11.6	6	9.5	2.5	10	10	1	39.72
614.061.00.2	25	20	32	11.8	6.5	9.5	3	10	10	1	51.25
615.061.00.2	32	25	40	13.9	7.1	12.4	3.5	10	10	1	82.96
616.061.00.2	40	32	50	15.9	7.7	12.4	3.9	10	5	1	124.44

Geberit Mepla ball valve with male thread and actuator lever

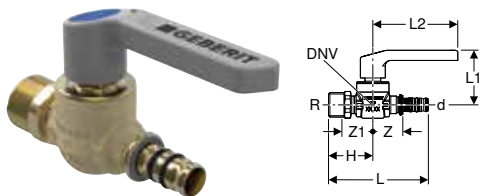

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics


- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	DN1	d, ø [mm]	R ["]	L [cm]	L1 [cm]	L2 [cm]	H [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
612.063.00.2	15	15	20	20	3/4	10.8	6	9.2	4.8	3.2	3.4	10	10	1	57.02

Geberit Mepla ball valve with actuator lever



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.020.00.2	12	8	16	10.1	6	9.5	2.4	10	10	1	61.19
602.020.00.2	15	15	20	12	6	9.5	2.5	10	10	1	68.04
603.020.00.2	20	15	26	12	6	9.5	2.5	10	10	1	81.66
604.020.00.2	25	20	32	12	6.5	9.5	3	10	10	1	112.30
605.020.00.2	32	25	40	13.9	7.1	12.4	3.5	10	5	1	163.32
606.020.00.2	40	32	50	15.9	7.7	12.4	3.9	10	5	1	238.19

Geberit Mepla ball valve with male thread and actuator lever



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For seawater
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Technical data


Product material	Gunmetal (CuSn5Zn5Pb2-C)
------------------	--------------------------

Scope of delivery

- Colour markings (red, blue, green)

Art. no.	DN	DNV	DN1	d, ø [mm]	R ["]	L [cm]	L1 [cm]	L2 [cm]	H [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
602.023.00.2	15	15	20	20	3/4	10.8	6	9.2	4.8	3.2	3.4	10	10	1	100.01
603.023.00.2	20	15	20	26	3/4	10.8	6	9.2	4.8	2.7	3.4	10	10	1	118.64

Geberit spindle extension set for ball valve



Application purposes


- For lever fastening with screw

Scope of delivery

- Spindle extension
- Bolt

Art. no.	DNV	L [cm]	SU1 [pc.]	GBP/pc.
610.059.00.1	25 / 32	4	1	23.90

Geberit actuator lever set, small, for ball valve



Application purposes

- For lever fastening with screw


Scope of delivery

- Actuator lever
- Bolt
- Colour markings (red, blue, green)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
242.807.00.1	8 / 12 / 15 / 20	10	1	12.92

With Mapress pressing connections

Geberit Mapress Stainless Steel ball valve with actuator lever

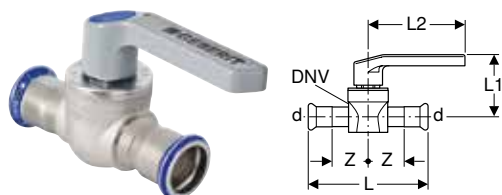

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Characteristics

- Approval in accordance with DVGW
- Model Geberit T4
- Ball and base unit fully exposed to flow
- Lever fastening with screw
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +95 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Scope of delivery


- Colour markings (red, blue, green)

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
94952	12	15	15	10.4	5.9	9.2	3.2	10	5	1	115.70
94953	15	15	18	10.4	5.9	9.2	3.2	10	5	1	124.74
94954	20	20	22	11.6	6.2	9.2	3.7	10	5	1	147.82
94955	25	25	28	13.4	7.1	12.4	4.4	10	5	1	175.65
94956	32	32	35	15.4	7.6	12.4	5.1	10	5	1	221.78
94957	40	40	42	17.7	8.3	14.7	5.9	10	5	1	268.02
94958	50	50	54	20.6	9	14.7	6.8	10	5	1	323.53

Pipe Valve Fittings

Ball valves
With Mapress pressing connections

Geberit spindle extension set for ball valve



Application purposes


- For lever fastening with screw

Scope of delivery

- Spindle extension
- Bolt

Art. no.	DNV	L [cm]	SU1 [pc.]	GBP/pc.
610.059.00.1	25 / 32	4	1	23.90
610.060.00.1	40 / 50	4	1	28.99

Geberit actuator lever set, small, for ball valve



Application purposes


- For lever fastening with screw

Scope of delivery

- Actuator lever
- Bolt
- Colour markings (red, blue, green)

Art. no.	DNV	SU2 [pc.]	SU1 [pc.]	GBP/pc.
242.807.00.1	8 / 12 / 15 / 20	10	1	12.92

Geberit Mapress ball valve, NPW, with actuator lever

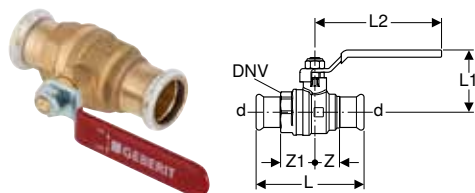

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For installations with Geberit Mapress Carbon Steel
- For installations with Geberit Mapress Stainless Steel
- For installations with Geberit Mapress Copper

Characteristics


- Ball made of brass, chrome-plated
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +120 °C
Product material	Brass CW617N

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
94922	12	15	15	7.7	4.4	8.5	1.7	2.4	16		25	1	23.21
94923	15	15	18	8	4.4	8.5	1.7	2.4	16		25	1	24.49
94924	20	20	22	8.9	5.2	10.6	2.1	2.9	16	1200	25	1	28.96
94925	25	25	28	9.6	5.6	10.6	2.4	3.1	16	800	25	1	36.67
94926	32	32	35	10.9	6.1	10.6	2.7	3.4	16	640	10	1	47.25
94927	40	40	42	14.1	7.9	15.5	3.6	4.5	16		10	1	97.59
94928	50	50	54	15.7	9.4	17.5	3.9	4.8	16	250	5	1	130.79

Geberit Mapress ball, NPW, with actuator lever, offset



Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For installations with Geberit Mapress Carbon Steel
- For installations with Geberit Mapress Stainless Steel
- For installations with Geberit Mapress Copper

Characteristics


- Ball made of brass, chrome-plated
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +120 °C
Product material	Brass CW617N

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
94962	12	15	15	7.7	10.4	8.5	1.7	2.4	16		25	1	62.17
94963	15	15	18	8	10.4	8.5	1.7	2.4	16		25	1	66.65
94964	20	20	22	8.9	11.7	10.6	2.1	2.9	16		25	1	74.72
94965	25	25	28	9.6	12.1	10.6	2.4	3.1	16	800	25	1	82.15
94966	32	32	35	10.9	12.6	10.6	2.7	3.4	16		10	1	104.84
94967	40	40	42	14.1	14	15	3.6	4.5	16		10	1	166.87
94968	50	50	54	15.7	15.5	17	3.9	4.8	16		5	1	209.66

Geberit spindle extension set for ball valve, NPW




Scope of delivery

- Spindle extension
- Bolt
- Nut

Art. no.	DNV	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
94935	15	6	5		1	1.42
94936	20 / 25 / 32	6.5	25		1	1.72
94937	40	6.5		5	1	2.31
94938	50	6.5		5	1	3.12



Geberit Mapress Stainless Steel ball valve with actuator lever, flanged

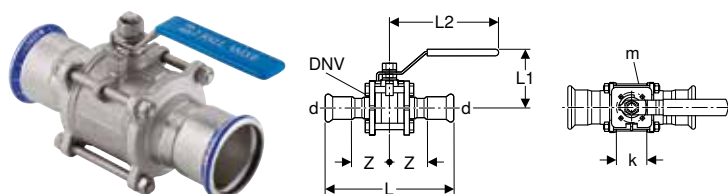

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water and process water
- For treated water (application range according to Technical Information "Treated water")
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for $d = 76.1\text{--}108\text{ mm}$)
- Length-adjustable actuator lever (only for $d = 108\text{ mm}$)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DNV	d, \varnothing [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
92100	12	15	15	–	–	12.2	5.5	10.5	4.1	40		25	1	100.15
92101	15	15	18	–	–	12.2	5.5	10.5	4.1	40		5	1	111.84
92102	20	20	22	–	–	13.3	6.1	10.5	4.6	40		20	1	140.22
92103	25	25	28	–	–	14.2	7.2	13	4.8	16		5	1	180.27
92104	32	32	35	–	–	17	8	13	5.9	16	250	5	1	220.32
92105	40	40	42	–	–	19.4	9.1	16	6.7	16		5	1	300.46
92106	50	50	54	–	–	22.1	10.2	16	7.5	16		1	1	400.58
92107	65	65	76.1	70	9	29.1	14	22.5	9.3	16	30		1	761.12
92108	80	80	88.9	70	9	33.3	15	36	10.6	16	12		1	1121.56
92109	100	100	108	102	11	41.2	19.2	50	13.1	16	12		1	1922.70

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 404

Geberit Mapress Stainless Steel ball valve with actuator lever and hose connector, flanged



Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water and process water
- For treated water (application range according to Technical Information "Treated water")
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Threaded nipple made of brass, with screw cap
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Art. no.	DN	DNV	d, \varnothing [mm]	G ["]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92110	12	15	15	3/4	12.7	5.5	10.5	4.3	4.1	40	1	100.15
92112	20	20	22	1	13	6.1	10.5	4.7	3.6	40	1	140.22

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 404

Geberit Mapress CuNiFe ball valve with actuator lever, flanged

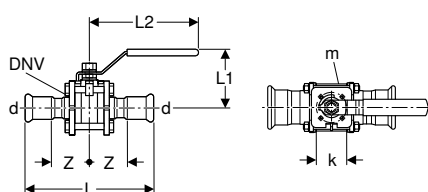

Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For service water and process water
- For grey and black water with pH value > 6.0
- For seawater
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Valve made of CrNiMo steel
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for d = 76.1–108 mm)
- Length-adjustable actuator lever (only for d = 108 mm)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 – +120 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DNV	d, ø [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92120	12	15	15	–	–	12.2	5.5	10.5	4.1	13	1	218.50
92122	20	20	22	–	–	13.3	6.1	10.5	4.6	13	1	305.91
92123	25	25	28	–	–	14.2	7.2	13	4.8	13	1	393.26
92124	32	32	35	–	–	17	8	13	5.9	13	1	428.66
92125	40	40	42	–	–	19.4	9.1	16	6.7	13	1	491.60
92126	50	50	54	–	–	22.1	10.2	16	7.5	13	1	655.47
92127	65	65	76.1	70	9	29.1	14	22.5	9.3	10	1	1037.84
92128	80	80	88.9	70	9	33.3	15	36	10.6	10	1	1529.42
92129	100	100	108	102	11	41.2	19.2	50	13.1	10	1	2621.82

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 404

Geberit Mapress CuNiFe ball valve with actuator lever and hose connector, flanged



Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For service water and process water
- For grey and black water with pH value > 6.0
- For seawater
- For extinguishing water (wet)
- For compressed air (oil purity class 0–3)

Characteristics

- Threaded nipple made of brass, with screw cap
- Valve made of CrNiMo steel
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data


Operating temperature	-20 – +120 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DNV	d, ø [mm]	G ["]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	Z1 [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92132	20	20	22	1	13.6	6.1	10.5	4.7	4.2	13	1	321.18

Accessories

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 404

Actuator lever set, lockable, for Geberit Mapress ball valve, flanged

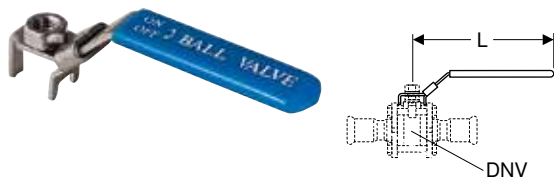

Technical data

Product material	Stainless steel
------------------	-----------------


Scope of delivery

- Lever
- Washer
- Nut

Art. no.	DNV	L [cm]	SU1 [pc.]	GBP/pc.
90775	15	8.5	1	16.10
90776	20	9.5	1	21.59
90778	25 / 32	12	1	28.74
90779	40 / 50	15	1	46.59
90780	65	21.5	1	83.07
90781	80	35	1	83.07
90783	100	50	1	123.49

With Mapress pressing connections, FKM, blue

Geberit Mapress Stainless Steel ball valve with actuator lever, flanged (FKM, blue)

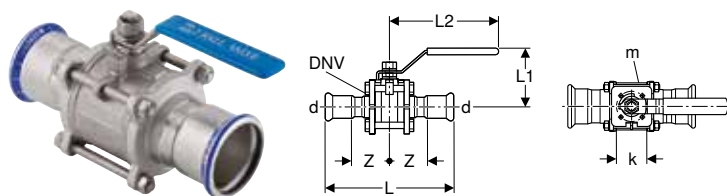

Application purposes

- For compressed air (oil purity class 0–4)

Technical data

Operating temperature	-25 – +180 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Characteristics


- Pressing socket with black protection plug
- Spindle caulk made of PTFE
- Section seal of flange and ball made of PTFE
- Fulfils requirements in accordance with TA Air VDI 2440
- Connecting flange for motor in accordance with EN ISO 5211 (only for d = 76.1–108 mm)
- Length-adjustable actuator lever (only for d = 108 mm)
- Pressing indicator
- Leaky if unpressed
- Seal ring made of FKM, blue

Art. no.	DN	DNV	d, ø [mm]	k [mm]	m [mm]	L [cm]	L1 [cm]	L2 [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
50780	12	15	15	–	–	12.5	5.5	9.5	4.3	16	1	108.48
50782	20	20	22	–	–	13.5	6.5	11	4.7	16	1	151.64
50783	25	25	28	–	–	14.7	7.5	14	5.1	16	1	194.49
50784	32	32	35	–	–	17.3	8	14	6.1	16	1	237.96
50785	40	40	42	–	–	19.6	9.5	16.5	6.8	16	1	324.98
50786	50	50	54	–	–	22.4	10.5	16.5	7.7	16	1	436.22
50787	65	65	76.1	70	9	30.1	13.5	22	9.8	16	1	839.22
50788	80	80	88.9	70	9	34	14.5	35	11	16	1	1224.92
50789	100	100	108	102	11	41.8	17.5	45	13.4	16	1	2112.69

To order additionally

- Actuator lever set, lockable, for Geberit Mapress ball valve, flanged → p. 404

Actuator lever set, lockable, for Geberit Mapress ball valve, flanged

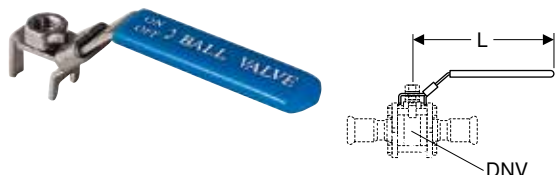

Technical data

Product material	Stainless steel
------------------	-----------------

Scope of delivery

- Lever
- Washer
- Nut


Art. no.	DNV	L [cm]	SU1 [pc.]	GBP/pc.
90775	15	8.5	1	16.10
90776	20	9.5	1	21.59
90778	25 / 32	12	1	28.74
90779	40 / 50	15	1	46.59
90780	65	21.5	1	83.07
90781	80	35	1	83.07
90783	100	50	1	123.49

Ball valves for concealed installation

With FlowFit pressing connections

New

Geberit FlowFit concealed ball valve with insulation

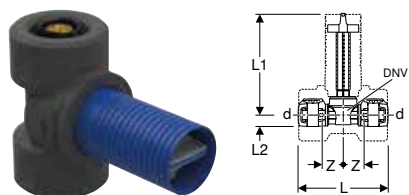

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)
- For solid and drywall construction

Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Fastening points for circular hole \varnothing 60 mm
- Replaceable valve top with ball and seals
- With concealed turn handle actuation
- Lead-free
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
Material, insulation	EPP
Insulation thickness	10 mm
Thermal conductivity, insulation	0.035 W/(m·K)

Scope of delivery

- Concealed turn handle actuation
- Spindle extension
- Round protection box, can be shortened
- Protection cover plug with marking tip

Art. no.	DN	DNV	d, \varnothing [mm]	L [cm]	L1 [cm]	Z [cm]	K [cm]	PN [bar]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
619.870.00.1	12	8	16	11.9	12.5	2.7	7.3	10	10	1	62.12

Available as of April 2023




Pipe Valve Fittings

Ball valves for concealed installation
With Mepla pressing connections

New

Geberit FlowFit concealed ball valve

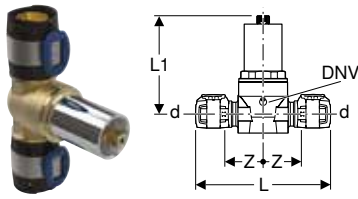

Application purposes

- Application overview – Geberit FlowFit → p. 263

Technical data

Product material	Lead-free silicon bronze (CuZn21Si3P)
------------------	---------------------------------------

Characteristics


- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing connector with transparent protective cap

Art. no.	Colour / surface	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
619.860.21.5	gloss chrome-plated	12	8	16	11.8	7.5	2.7	10	10	1	33.34
619.861.21.5	gloss chrome-plated	15	15	20	12.1	7.7	2.8	10	10	1	37.94
619.862.21.5	gloss chrome-plated	20	15	25	12.1	7.7	2.8	10	10	1	47.13

Available as of April 2023

With Mepla pressing connections

Geberit Mepla concealed ball valve with turn handle

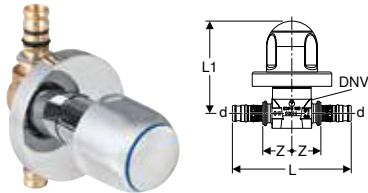

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap


Scope of delivery

- Turn handle, chrome-plated
- Colour markings (red, blue)
- Cover collar, chrome-plated

Art. no.		DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.011.21.2	PO	12	8	16	10.1	10.2	2.4	10	10	1	50.60
612.011.21.2	PO	15	15	20	10.7	10.3	2.5	10	10	1	50.94
613.011.21.2	PO	20	15	26	11.7	10.3	2.5	10	10	1	56.18

PO: Phase out as of April 2023

Geberit Mepla concealed ball valve with cover collar

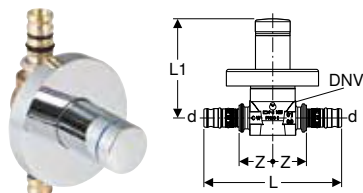

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Product material	Brass CW617N
------------------	--------------

Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Lead-free
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Leaky if unpressed
- O-ring made of EPDM
- Pressing nipple with transparent protective cap

Scope of delivery

- Cover collar with end cap, chrome-plated
- Colour markings (red, blue)
- Wrench


Art. no.		DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
611.021.21.2	PO	12	8	16	10.1	7.5	2.4	10	10	1	36.37
612.021.21.2	PO	15	15	20	10.7	7.6	2.5	10	10	1	36.67
613.021.21.2	PO	20	15	26	11.7	7.6	2.5	10	10	1	39.72

PO: Phase out as of April 2023

With Compact connections

New

Geberit Compact concealed ball valve

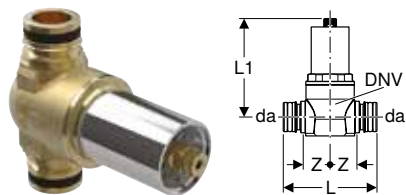

Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Operating temperature	0–95 °C
Product material	Brass CW617N

Characteristics


- Approval in accordance with DVGW
- Ball and base unit fully exposed to flow
- Chrome-plated trim parts
- Replaceable upper part
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- O-ring made of EPDM

Art. no.	Colour / surface	DN	DNV	da [mm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
612.012.21.5	gloss chrome-plated	15	15	21	6.8	10.3	2	10	10	1	26.66

Available as of April 2023

With Mapress pressing connections

Geberit Mapress concealed ball valve



Application purposes

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For treated water (application range according to Technical Information "Treated water")
- For rainwater with a pH value of > 6.0
- For compressed air (oil purity class 0–3)
- For negative pressure
- For inert gases (e.g. nitrogen)

Technical data

Operating temperature	0–95 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Characteristics

- Approval in accordance with DVGW
- Model Geberit K4
- Ball and base unit fully exposed to flow
- Replaceable valve top with ball and seals
- With concealed turn handle actuation
- Base unit made of stainless steel
- Upper part made of gunmetal
- Ball made of PPSU
- Upper part caulk made of EPDM
- Ball caulks made of silicone
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Scope of delivery


- Concealed turn handle actuation
- Spindle extension
- Round protection box, can be shortened
- Protection cover plug with marking tip

Art. no.	DN	DNV	d, ø [mm]	L [cm]	L1 [cm]	Z [cm]	K [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
94912	12	15	15	10.4	12.6	3.2	7.3	16	1	115.70
94913	15	15	18	10.3	12.6	3.2	7.3	16	1	118.41
94914	20	20	22	11.7	12.6	3.8	7.3	16	1	147.82

Non-return valves

With Mapress pressing connections

Geberit Mapress Stainless Steel non-return valve, flanged



Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water ≤ 120 °C
- For service water and process water
- For treated water (application range according to Technical Information "Treated water")
- For grey and black water with pH value > 6.0
- For extinguishing water (wet)

Technical data


Operating temperature	-20 – +120 °C
Product material	CrNiMo steel 1.4401 (EN 10088)

Characteristics

- Valve seal made of PTFE
- Section seal of flange made of PTFE
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Art. no.	DN	DNV	d, ø [mm]	L [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92140	12	15	15	11.1	3.8	40	1	172.25
92142	20	20	22	12	3.9	40	1	216.29
92143	25	25	28	12.6	4	16	1	260.35
92144	32	32	35	14.7	4.8	16	1	320.47
92145	40	40	42	16.7	5.3	16	1	380.55
92146	50	50	54	18.5	5.8	16	1	588.83
92147	65	65	76.1	25.5	7.5	16	1	1041.48
92148	80	80	88.9	28.5	8.3	16	1	1542.20
92149	100	100	108	34.6	9.8	16	1	2123.02

Geberit Mapress CuNiFe non-return valve, flanged



Application purposes

- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For service water and process water
- For grey and black water with pH value > 6.0
- For seawater
- For extinguishing water (wet)

Characteristics

- Valve made of CrNiMo steel
- Valve seal made of PTFE
- Section seal of flange made of PTFE
- Pressing indicator
- Leaky if unpressed
- Seal ring made of CIIR, black
- Pressing socket with transparent protection plug

Technical data

Operating temperature	-20 – +120 °C
Product material	CuNi10Fe1.6Mn, material no. 2.1972.11

Art. no.	DN	DNV	d, ø [mm]	L [cm]	Z [cm]	PN [bar]	SU1 [pc.]	GBP/pc.
92150	12	15	15	11.1	3.8	13	1	394.61
92152	20	20	22	12	3.9	13	1	495.56
92153	25	25	28	12.6	4	13	1	596.48
92154	32	32	35	14.7	4.8	13	1	550.57
92155	40	40	42	16.7	5.3	13	1	653.86
92156	50	50	54	18.5	5.8	13	1	1011.73
92157	65	65	76.1	25.5	7.5	10	1	1491.19
92158	80	80	88.9	28.5	8.3	10	1	2208.09
92159	100	100	108	34.6	9.8	10	1	3039.66





Tools

Preliminary Remarks	412
Pressing tools	414
Pressing tools compatibility [1]	414
Pressing tools compatibility [2]	415
Pressing tools compatibility [2XL]	417
Tools for Geberit Mapress	419
Assortment overview – Geberit Mapress compatibility [1], [2], [3], [2XL] and [HCP]	419
Assortment overview – Geberit pressing collars	421
Pressing tools compatibility [1]	421
Pressing tools compatibility [2]	422
Pressing tools compatibility [2XL]	425
Pressing tools compatibility [3]	427
Pipe processing tools	427
Pressure test plugs	430
Test equipment	431
Accessories	431
Tools for Geberit FlowFit	432
Assortment overview – Geberit FlowFit compatibility [1] and [2]	432
Hand-operated pressing tools	432
Pressing tools compatibility [1]	433
Pressing tools compatibility [2]	433
Pipe working tools	434
Accessories	436
Tools for Geberit Mepla	439
Assortment overview – Geberit Mepla compatibility [1] and [2]	439
Hand-operated pressing tools	440
Pressing tools compatibility [1]	441
Pressing tools compatibility [2]	442
Pipe processing tools	444
Pressure test plugs	447
Test equipment	448
Accessories	449
Universal cases	449
Universal cases	449



Preliminary Remarks

The base element for the pressed joint is a pressfitting designed for plastic shaping. A seal ring has been inserted in the crimp shaped ends of the pressfitting ex works.

Pressing operation

The pressfitting and system pipe are pressed on two planes:

Strength plane

The pressfitting and the system pipe are shaped. The mechanical strength of the connection is thereby achieved.

Tightness plane

The seal ring is shaped when the socket end is pressed. The elastic resilience of the seal ring ensures permanent tightness of the connection.

Simple

Simple connection technology



Pressed joint before pressing




Pressed joint after pressing

Pressing contour


The press connection is established with Geberit Mapress pressing jaws or pressing collars depending on the pipe dimension. This results in different pressing contours.

The pipe dimensions d12-35 are normally pressed with pressing jaws. If pressing jaws are used, a hexagonal pressing contour is formed.

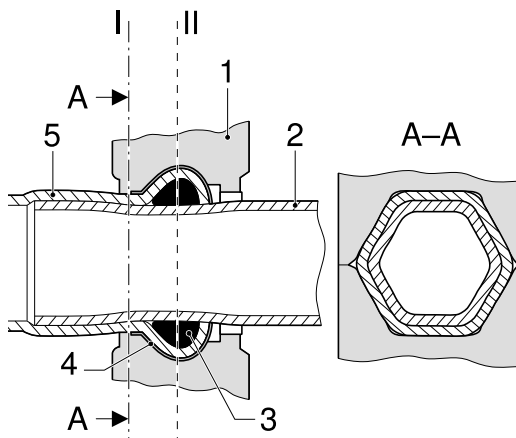

- I Strength plane
- II Tightness plane
- 1 Pressing jaw
- 2 System pipe
- 3 Seal ring
- 4 Pressing indicator
- 5 Pressfitting

The pipe dimensions d42-108 are pressed with pressing collars and the corresponding adapters for pressing collars. When using pressing collars, a pressing contour referred to as a lemon-shaped contour is formed.

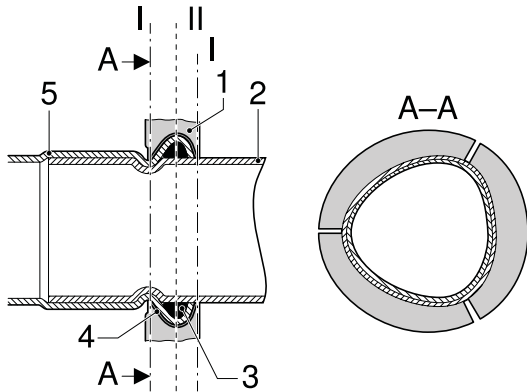

- | | |
|----|--------------------|
| I | Strength plane |
| II | Tightness plane |
| 1 | Pressing jaw |
| 2 | System pipe |
| 3 | Seal ring |
| 4 | Pressing indicator |
| 5 | Pressfitting |

The fitting beads are provided with a pressing indicator at the factory. The pressing indicator has the following functions:

- Indicates to the plumber before the pressure test that there are unpressed connections
- Displays the dimensions of the fitting in unpressed status
- Colour indicates the type of product material concerned
- Clearly identifies the fitting as a Geberit product

The pressing indicator is destroyed by the pressing sequence and is subsequently removed by the fitter.

Geberit Mapress is characterised by the following features:

Quick

Lower labour costs in comparison to conventional connection technology

Clean

Extremely suitable for renovation of living areas
Seal rings are protected from dirt

Safe

No danger of fire as no welding or soldering necessary
Unpressed connections are easily identified
It is easy to distinguish between product materials using the indicator colours
Application ranges are easily identified by the plug colours
No danger of confusion with third-party products

Economical

No consumables such as oxygen or gas required

Simple

Simple connection technology

Universal

Can be used for surface-mounted and concealed installations

Hygienic

Meets the requirements of DVGW W 270 regarding microbiological safety

Experienced

More than 30 years of practical experience in pressing technology

Can be processed down to -20 °C

Can also be installed at low temperatures



Tools

Pressing tools
Pressing tools compatibility [1]

Pressing tools

Pressing tools compatibility [1]

Geberit ACO 103plus pressing tool [1], in case



Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	19 kN
Protection degree	IP20
Protection class	III
Operating voltage	12 V DC
Power consumption	240 W
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	75.5 dB(A)
Maximum sound power level	86.5 dB(A)
Vibration emission value	≤ 2.5 m/s ²
Weight	1.7 kg

Characteristics

- Geberit compatibility [1]
- LED pressing point light
- With Bluetooth® interface for the NovoCheck app
- Hydraulic

Scope of delivery

- Battery-operated pressing tool [1], 12 V DC
- Battery charger
- BRUNOX® Turbo-Spray®
- 2 lithium-ion batteries, 12 V / 2 Ah
- Case

Art. no.	Compatibility	Nominal voltage / Power consumption mains frequency	[W]	Plug type	SU4 [pc.]	SU1 [pc.]	GBP/pc.
----------	---------------	--	-----	-----------	--------------	--------------	---------

Valid for system: Geberit Mapress / Geberit Mepla

691.017.P5.1	[1]	230 V / 50–60 Hz	55	BS 1363 A	16	1	2234.04
--------------	-----	------------------	----	-----------	----	---	---------

Accessories

- Geberit carrying belt for case → p. 449

Geberit Li-ion battery 12 V



Application purposes

- For ACO 103plus pressing tools
- For ACO 102 pressing tools

Technical data

Rechargeable battery type	lithium-ion battery
Operating temperature	-10 – +50 °C

Art. no.	Nominal voltage / mains frequency	Battery capacity [Ah]	SU1 [pc.]	GBP/pc.
690.019.00.1	12 V DC	2	1	144.26

Geberit battery charger 12 V



Application purposes

- For lithium-ion batteries 12 V
- For ACO 103plus pressing tools
- For ACO 102 pressing tools

Technical data

Output voltage	12 V DC
Charging current	3 A

Art. no.	Nominal voltage / mains frequency	Power consumption [W]	Plug type	Battery charge time [min]	SU1 [pc.]	GBP/pc.
242.614.P5.1	220–240 V / 50/60 Hz	55	BS 1363 A	30	1	209.96

Pressing tools compatibility [2]

Geberit MFP 2 hand-operated pressing tool [2]



Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Operating temperature	-20 – +60 °C
Weight	4.5 kg

Characteristics

- Geberit compatibility [2]
- Hydraulic

Scope of delivery

- Case

Art. no.	Compatibility	SU1	GBP/pc.
90523	[2]	1	1543.22

Geberit ACO 203plus pressing tool [2], in case



Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Protection degree	IP20
Protection class	III
Operating voltage	18 V DC
Power consumption	450 W
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	78 dB(A)
Maximum sound power level	89 dB(A)
Vibration emission value	≤ 2.5 m/s ²
Weight	2.8 kg

Characteristics

- Geberit compatibility [2]
- LED pressing point light
- With Bluetooth® interface for the NovoCheck app
- Hydraulic
- Brushless motor

Scope of delivery

- Battery-operated pressing tool [2], 18 V DC
- Battery charger
- BRUNOX® Turbo-Spray®
- 2 lithium-ion rechargeable batteries, 18 V / 2 Ah
- Case

Art. no.	Compatibility	Nominal voltage / mains frequency	Power consumption [W]	Plug type	SU4 [pc.]	SU1 [pc.]	GBP/pc.
----------	---------------	-----------------------------------	-----------------------	-----------	-----------	-----------	---------

Valid for system: Geberit Mapress / Geberit Mepla

691.218.P5.2	[2]	230 V / 50–60 Hz	90	BS 1363 A	16	1	2718.87
--------------	-----	------------------	----	-----------	----	---	---------

Accessories

- Geberit carrying belt for case → p. 449
- Geberit Li-ion battery 18 V → p. 416



Tools

Pressing tools
Pressing tools compatibility [1]

Geberit ACO 203plus pressing tool [2], in case



Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Protection degree	IP20
Protection class	III
Operating voltage	18 V DC
Power consumption	450 W
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	78 dB(A)
Maximum sound power level	89 dB(A)
Vibration emission value	≤ 2.5 m/s ²
Weight	2.8 kg

Characteristics

- Geberit compatibility [2]
- LED pressing point light
- With Bluetooth® interface for the NovoCheck app
- Hydraulic
- Brushless motor

Scope of delivery

- Battery-operated pressing tool [2], 18 V DC
- Battery charger
- BRUNOX® Turbo-Spray®
- 2 lithium-ion rechargeable batteries, 18 V / 5 Ah
- Case

Art. no.	Compatibility	Nominal voltage / mains frequency	Power consumption [W]	Plug type	SU4 [pc.]	SU1 [pc.]	GBP/pc.
----------	---------------	-----------------------------------	-----------------------	-----------	-----------	-----------	---------

Valid for system: Geberit Mapress / Geberit Mepla

691.219.P5.2	[2]	230 V / 50–60 Hz	90	BS 1363 A	16	1	2718.87
--------------	-----	------------------	----	-----------	----	---	---------

Accessories

- Geberit carrying belt for case → p. 449
- Geberit Li-ion battery 18 V → p. 416

Geberit Li-ion battery 18 V



Application purposes

- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools

Characteristics

- State of charge display

Technical data

Rechargeable battery type	lithium-ion battery
Operating temperature	-10 – +50 °C

Art. no.	Nominal voltage / mains frequency	Battery capacity [Ah]	SU1 [pc.]	GBP/pc.
690.589.00.1	18 V DC	2	1	213.05
690.600.00.1	18 V DC	5	1	633.43

Geberit battery charger 12/ 18 V



Application purposes

- For lithium-ion batteries 18 V
- For lithium-ion batteries 12 V
- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools
- For CP700G hydraulic power pack

Technical data

Output voltage	12 / 18 V DC
Charging current	3 A

Art. no.	Nominal voltage / mains frequency	Power consumption [W]	Plug type	Battery charge time [min]	SU1 [pc.]	GBP/pc.
690.598.P5.1	110–240 V / 50/60 Hz	90	BS 1363 A	40–75	1	248.21

Pressing tools compatibility [2XL]

Geberit ACO 203XLplus pressing tool [2] / [2XL], in case



Application purposes

- For pressing Geberit pressing systems

Technical data

Nominal force	32 kN
Protection degree	IP20
Protection class	III
Operating voltage	18 V DC
Power consumption	450 W
Rechargeable battery type	lithium-ion battery
Operating temperature	-20 – +60 °C
Operating temperature, rechargeable battery	-10 – +50 °C
Sound pressure level	78 dB(A)
Maximum sound power level	89 dB(A)
Vibration emission value	≤ 2.5 m/s ²
Weight	3.8 kg

Characteristics

- Geberit compatibility [2]
- Geberit compatibility [2XL]
- Head rotating
- With Bluetooth® interface for the NovoCheck app
- Hydraulic
- Brushless motor

Scope of delivery

- Battery-operated pressing tool [2XL] 18 V DC
- Battery charger
- BRUNOX® Turbo-Spray®
- 2 lithium-ion rechargeable batteries, 18 V / 5 Ah
- Case

Art. no.	Compatibility	Nominal voltage / mains frequency	Power consumption [W]	Plug type	SU4 [pc.]	SU1 [pc.]	GBP/pc.
691.229.P5.2	[2], [2XL]	230 V / 50–60 Hz	90	BS 1363 A	16	1	3681.88

Valid for system: Geberit Mapress / Geberit Mepla

691.229.P5.2	[2], [2XL]	230 V / 50–60 Hz	90	BS 1363 A	16	1	3681.88
--------------	------------	------------------	----	-----------	----	---	---------

Accessories

- Geberit carrying belt for case → p. 449



Tools

Pressing tools
Pressing tools compatibility [2XL]

Geberit Li-ion battery 18 V



Application purposes

- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools

Characteristics

- State of charge display

Technical data

Rechargeable battery type	lithium-ion battery
Operating temperature	-10 – +50 °C

Art. no.	Nominal voltage / mains frequency	Battery capacity [Ah]	SU1 [pc.]	GBP/pc.
690.589.00.1	18 V DC	2	1	213.05
690.600.00.1	18 V DC	5	1	633.43

Geberit battery charger 12/ 18 V



Application purposes

- For lithium-ion batteries 18 V
- For lithium-ion batteries 12 V
- For ACO 203plus pressing tools
- For ACO 203XLplus pressing tools
- For ACO 202 pressing tools
- For ACO 203 pressing tools
- For ACO 203XL pressing tools
- For CP700G hydraulic power pack

Technical data















Output voltage	12 / 18 V DC
Charging current	3 A

Art. no.	Nominal voltage / mains frequency	Power consumption [W]	Plug type	Battery charge time [min]	SU1 [pc.]	GBP/pc.
690.598.P5.1	110–240 V / 50/60 Hz	90	BS 1363 A	40–75	1	248.21

Tools for Geberit Mapress

Assortment overview – Geberit Mapress compatibility [1], [2], [3], [2XL] and [HCP]

Geberit Great Britain, Version: December 2022

	Art. no.	Dimension
Compatibility [1]		
 <p>Geberit ACO 103plus pressing tool [1], in case</p>	691.017.P5.1	
	690.190.00.1	12 / 15 / 18 / 22 / 28 / 35 mm
	690.192.00.1	15 / 18 / 22 / 28 / 35 mm
 <p>Geberit Mapress set of pressing jaws [1]</p>	690.191.00.1	15 / 18 / 22 / 28 mm
	690.193.00.1	15 / 22 / 28 / 35 mm
	690.195.00.1	12 / 15 / 22 / 28 / 35 mm
 <p>Geberit Mapress pressing jaw [1]</p>	690.121.00.1	12 mm
	690.122.00.1	15 mm
	690.123.00.1	18 mm
	690.124.00.1	22 mm
	690.125.00.1	28 mm
	690.126.00.1	35 mm
Compatibility [2]		
 <p>Geberit MFP 2 hand-operated pressing tool [2]</p>	90523	
 <p>Geberit ACO 203plus pressing tool [2], in case</p>	691.218.P5.2	
	690.230.00.1	12 / 15 / 18 / 22 / 28 / 35 mm
	690.231.00.1	15 / 18 / 22 / 28 mm
 <p>Geberit Mapress set of pressing jaws [2]</p>	690.232.00.1	15 / 18 / 22 / 28 / 35 mm
	690.233.00.1	15 / 22 / 28 / 35 mm
	690.235.00.1	12 / 15 / 22 / 28 / 35 mm



Tools

Tools for Geberit Mapress Pressing tools compatibility [2XL]

Geberit Great Britain, Version: December 2022






	Art. no.	Dimension
<p>Geberit Mapress pressing jaw [2]</p>	690.221.00.1	12 mm
	690.222.00.1	15 mm
	690.223.00.1	18 mm
	690.224.00.1	22 mm
	690.225.00.1	28 mm
	690.226.00.1	35 mm
<p>Geberit Mapress pressing collars [2], in case</p>	691.296.00.2	42 / 54 mm
	691.297.00.3	42 / 54 / 66.7 mm
<p>Geberit Mapress pressing collar [2], [3]</p>	691.181.00.1	35 mm
	691.182.00.1	42 mm
	691.183.00.1	54 mm
	691.185.00.3	66.7 mm
<p>Geberit ZB 203A adaptor jaw [2]</p>	691.203.00.1	35 / 42 / 50 / 54 / 63 / 66.7 / 75 mm
Compatibility [2XL]		
<p>Geberit ACO 203XLplus pressing tool [2] / [2XL], in case</p>	691.229.P5.2	
<p>Geberit Mapress pressing collars [2XL], in case</p>	691.188.00.1	76.1 / 88.9 mm
<p>Geberit Mapress pressing collar [2XL], in case</p>	691.189.00.1	108 mm
<p>Geberit Mapress pressing collar [2XL] / [3]</p>	90797	76.1 mm
	90798	88.9 mm
	90799	108 mm
<p>Geberit ZB 221 Mapress adaptor jaw [2XL]</p>	691.186.00.1	76.1 / 88.9 / 108 mm
<p>Geberit ZB 222 Mapress adaptor jaw [2XL]</p>	691.187.00.1	108 mm



• For 66.7 mm Geberit Mapress copper material only, compatibility [2] can be used

Assortment overview – Geberit pressing collars

Geberit Great Britain, Version: December 2022

	Pressing collar, new - d76.1	Pressing collar, new - d88.9	Pressing collar, new - d108
			
	90797	90798	90799
Compatibility [3] - new			
Compatibility [2XL] - new			
691.186.00.1 Geberit ZB 221 Mapress adaptor jaw [2XL] 	✓	✓	✓
691.187.00.1 Geberit ZB 222 Mapress adaptor jaw [2XL] 			✓

✓ Compatible

Pressing tools compatibility [1]

Geberit Mapress set of pressing jaws [1]



Application purposes

- For technical building systems
- For pressing tools with Geberit compatibility [1]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [1]
- Pipe cutter
- Pipe deburrer
- Insertion distance template with marker pen
- PowerTest

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.190.00.1	[1]	12 / 15 / 18 / 22 / 28 / 35	1	1273.65
690.195.00.1	[1]	12 / 15 / 22 / 28 / 35	1	1117.00
690.191.00.1	[1]	15 / 18 / 22 / 28	1	966.71
690.192.00.1	[1]	15 / 18 / 22 / 28 / 35	1	1125.03
690.193.00.1	[1]	15 / 22 / 28 / 35	1	981.46



- Fit into Geberit case with case insert from 10A-IV



Tools

Tools for Geberit Mapress
Pressing tools compatibility [2]

Geberit Mapress pressing jaw [1]



Application purposes

- For technical building systems
- For pressing tools with Geberit compatibility [1]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.121.00.1	[1]	12	1	200.96
690.122.00.1	[1]	15	1	204.99
690.123.00.1	[1]	18	1	209.00
690.124.00.1	[1]	22	1	214.34
690.125.00.1	[1]	28	1	218.39
690.126.00.1	[1]	35	1	223.75

Accessories

- Geberit PowerTest → p. 431
- Geberit ACO 103plus pressing tool [1], in case → p. 414



- Fit into Geberit case with case insert from 10A-IV

Pressing tools compatibility [2]

Geberit Mapress set of pressing jaws [2]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [2]
- Pipe cutter
- Pipe deburrer
- Insertion distance template with marker pen
- PowerTest

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.230.00.1	[2]	12 / 15 / 18 / 22 / 28 / 35	1	1571.65
690.235.00.1	[2]	12 / 15 / 22 / 28 / 35	1	1335.96
690.231.00.1	[2]	15 / 18 / 22 / 28	1	1095.03
690.232.00.1	[2]	15 / 18 / 22 / 28 / 35	1	1346.43
690.233.00.1	[2]	15 / 22 / 28 / 35	1	1110.74

Accessories

- Geberit case for pressing jaws [2], [3], with insert 10C-II → p. 423



- Fit into Geberit case with case insert from 10C-II, 20A-V, 20B-IV, 20D-II
- Not suitable for Geberit pressing tools PWH 40

Geberit Mapress pressing jaw [2]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mapress pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.221.00.1	[2]	12	1	225.22
690.222.00.1	[2]	15	1	230.43
690.223.00.1	[2]	18	1	235.69
690.224.00.1	[2]	22	1	240.91
690.225.00.1	[2]	28	1	246.14
690.226.00.1	[2]	35	1	251.39

Accessories

- Geberit case for pressing jaws [2], [3], with insert 10C-II → p. 423
- Geberit PowerTest → p. 431



- Fit into Geberit case with case insert from 10C-II, 20A-V, 20B-IV, 20D-II
- Not suitable for Geberit pressing tools PWH 40

Geberit case for pressing jaws [2], [3], with insert 10C-II



Technical data

Product material	ABS
------------------	-----

Characteristics

- Can be equipped with six Geberit Mepla pressing jaws [2]
- Can be equipped with six Geberit Mapress pressing jaws [2] or [3]
- Can be equipped with Geberit Mepla deburring and calibration tool ø 16–50 mm
- Can be equipped with a Geberit Mapress pipe deburrer ø 12–54 mm
- Can be equipped with a Geberit Mapress pipe cutter up to ø 50 mm or Geberit scissors
- Can be equipped with a Geberit Mapress pipe cutter up to ø 54 mm
- Can be equipped with a Geberit Mapress insertion distance template with marker pen
- Can be equipped with a BRUNOX® Turbo-Spray® 100 ml
- Can be equipped with a Geberit grease pencil and a folding rule

Art. no.	Specification number	SU4 [pc.]	SU1 [pc.]	GBP/pc.
691.137.00.1	10C-II	24	1	128.50

Accessories

- Geberit carrying belt for case → p. 449



Tools

Tools for Geberit Mapress
Pressing tools compatibility [2]

Geberit Mapress pressing collars [2], in case



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Pressing collars
- ZB 203A adaptor jaw [2]
- BRUNOX® Turbo-Spray®
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, ø [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
691.296.00.2	[2]	42 / 54	24	1	2489.42
691.297.00.3	[2]	42 / 54 / 66.7		1	3944.17

Accessories

- Geberit carrying belt for case → p. 449



- Latest variant (691.297.00.3) collars suitable for pressing 66.7 mm Mapress Carbon Steel with [2] tools.
- Not suitable for Geberit pressing tools PWH 40

Geberit Mapress pressing collar [2], [3]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings
- Dimension ø 35 mm is exclusively suitable for pressing Geberit Mapress Stainless Steel and Carbon Steel for operating pressures up to 25 bar / 2500 kPa

Characteristics

- Pressable with ZB 203A adapter jaw [2]
- Pressable with ZB 203 adaptor jaw [2]
- Pressable with ZB 201 adaptor jaw [2], d35–54
- Pressable with ZB 303 adaptor jaw [3]

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.181.00.1	[2], [3]	35	1	2015.65
691.182.00.1	[2], [3]	42	1	972.59
691.183.00.1	[2], [3]	54	1	972.59
691.185.00.3	[2], [3]	66.7	1	1268.60

To order additionally

- Geberit ZB 203A adaptor jaw [2] → p. 424



- Latest variant 66.7 mm collar (691.185.00.3) is suitable for pressing 66.7 mm Mapress Carbon Steel with [2] tools.
- Not suitable for Geberit pressing tools PWH 40

Geberit ZB 203A adaptor jaw [2]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing with Geberit Mepla pressing collars [2] ø 63–75 mm
- For pressing with Geberit Mapress pressing collars [2] ø 35–66.7 mm

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.203.00.1	[2]	35 / 42 / 50 / 54 / 63 / 66.7 / 75	1	378.46



- Not suitable for Geberit pressing tools PWH 40

Pressing tools compatibility [2XL]

Geberit Mapress pressing collars [2XL], in case



Application purposes

- For ACO 203XL pressing tools
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Pressing collars
- ZB 221 adaptor jaw [2XL]
- BRUNOX® Turbo-Spray®
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, ø [mm]	SU1	GBP/pc. [pc.]
691.188.00.1	[2XL]	76.1 / 88.9	1	3456.26

Accessories

- Geberit carrying belt for case → p. 449

Geberit Mapress pressing collar [2XL], in case



Application purposes

- For ACO 203XL pressing tools
- For pressing Geberit Mapress pressfittings

Scope of delivery

- Pressing collar, ø 108 mm
- ZB 222 adaptor jaw [2XL] for final pressing
- BRUNOX® Turbo-Spray®
- Insertion distance template with marker pen
- Case

Art. no.	Compatibility	d, ø [mm]	SU1	GBP/pc. [pc.]
691.189.00.1	[2XL]	108	1	2907.52

To order additionally

- Geberit ZB 221 Mapress adaptor jaw [2XL] → p. 426

Accessories

- Geberit carrying belt for case → p. 449



Tools

Tools for Geberit Mapress
Pressing tools compatibility [2XL]

Geberit Mapress pressing collar [2XL] / [3]



Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
90797	[2XL], [3]	76.1	1	1078.76
90798	[2XL], [3]	88.9	1	1219.73
90799	[2XL], [3]	108	1	1758.36

To order additionally

- Geberit ZB 221 Mapress adaptor jaw [2XL] → p. 426
- Geberit ZB 222 Mapress adaptor jaw [2XL] → p. 426

Geberit ZB 221 Mapress adaptor jaw [2XL]



Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For final pressing with Geberit Mapress pressing collars [2XL] / [3] ø 76.1 und ø 88.9 mm
- For preliminary pressing of Geberit Mapress pressing collars [2XL] / [3] ø 108 mm

Scope of delivery

- Case
- ZB 221 adaptor jaw [2XL]

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.186.00.1	[2XL]	76.1 / 88.9 / 108	1	968.67

Geberit ZB 222 Mapress adaptor jaw [2XL]



Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For final pressing with Geberit Mapress pressing collars [2XL] / [3] ø 108 mm

Scope of delivery

- Case
- ZB 222 adaptor jaw [2XL] for final pressing

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
691.187.00.1	[2XL]	108	1	968.67

Pressing tools compatibility [3]

Geberit Mapress pressing collar [2], [3]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings
- Dimension \varnothing 35 mm is exclusively suitable for pressing Geberit Mapress Stainless Steel and Carbon Steel for operating pressures up to 25 bar / 2500 kPa

Characteristics

- Pressable with ZB 203A adaptor jaw [2]
- Pressable with ZB 203 adaptor jaw [2]
- Pressable with ZB 201 adaptor jaw [2], d35–54
- Pressable with ZB 303 adaptor jaw [3]

Art. no.	Compatibility	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
691.181.00.1	[2], [3]	35	1	2015.65
691.182.00.1	[2], [3]	42	1	972.59
691.183.00.1	[2], [3]	54	1	972.59
691.185.00.3	[2], [3]	66.7	1	1268.60

To order additionally

- Geberit ZB 203A adaptor jaw [2] → p. 424



- Latest variant 66.7 mm collar (691.185.00.3) is suitable for pressing 66.7 mm Mapress Carbon Steel with [2] tools.
- Not suitable for Geberit pressing tools PWH 40

Geberit Mapress pressing collar [2XL] / [3]



Application purposes

- For pressing tools with Geberit compatibility [2XL]
- For pressing tools with Geberit compatibility [3]
- For pressing Geberit Mapress pressfittings

Art. no.	Compatibility	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
90797	[2XL], [3]	76.1	1	1078.76
90798	[2XL], [3]	88.9	1	1219.73
90799	[2XL], [3]	108	1	1758.36

To order additionally

- Geberit ZB 221 Mapress adaptor jaw [2XL] → p. 426
- Geberit ZB 222 Mapress adaptor jaw [2XL] → p. 426

Pipe processing tools

Geberit Mapress pipe cutter R



Application purposes

- For cutting Geberit Mapress system pipes to length

Characteristics

- Spare cutting wheel in handle

Art. no.	d, \varnothing [mm]	Model	SU1 [pc.]	GBP/pc.
91088	12–54	65S	1	174.27
91087	12–35	35S	1	129.80



Tools

Tools for Geberit Mapress
Pressing tools compatibility [3]

Set of cutting wheels for Geberit Mapress pipe cutter R



Scope of delivery

- 2 cutting wheels
- Axle

Art. no.	d, \emptyset [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
91092	12-54	10	1	41.62

Geberit Mapress pipe deburrer



Application purposes

- For deburring the inside and outside of Geberit Mapress system pipes
- For deburring the inside and outside of standard copper pipes

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
90363	12-54	1	72.32
90357	12-35	1	34.68

Cutter for Geberit Mapress RE 1 electric pipe deburrer



Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
90365	15-108	1	249.77

Geberit Mapress stripping tool



Application purposes

- For removing the plastic jacketing from the insertion area on Geberit Mapress system pipes

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
90371	12	1	57.30
90372	15	1	57.30
90373	18	1	57.30
90374	22	1	57.30
90375	28	1	57.30

Geberit Mapress stripping tool



Application purposes

- For removing the plastic jacketing from the insertion area on Geberit Mapress system pipes

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
90376	35 / 42 / 54	1	68.00

Blade for Geberit Mapress stripping tool



Art. no.	d, \emptyset [mm]	SU2 [pc.]	GBP/pc.
90391	12 / 15 / 18	10	5.51
90394	22 / 28	10	5.51
90396	35 / 42 / 54	10	5.51

Geberit Mapress insertion distance template with marker pen



Application purposes

- For marking the insertion distance on Geberit Mapress system pipes

Art. no.	d, \emptyset [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90351	12-108	10	1	7.87

Geberit Mapress marker pen



Application purposes

- For Geberit Mapress insertion distance templates
- For marking the insertion distance on Geberit Mapress system pipes

Art. no.	Tip	SU3 [pc.]	SU2 [pc.]	GBP/pc.
90358	rounded	50	5	3.14

Geberit Mapress assembly clamp MH 1



Application purposes


- For fixing unpressed Geberit Mapress pipe/fitting joints

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
90563	54-108	1	448.35



Pressure test plugs

Geberit Mapress pressure test plug for fitting



Application purposes

- For temporarily closing Geberit Mapress fittings during the pressure test
- For pressure tests with cold water up to 22.5 bar / 2250 kPa
- For pressure tests with air up to 3 bar / 300 kPa

Characteristics

- Reusable
- O-ring made of NBR, black
- \varnothing 15–22 mm without ventilation
- \varnothing 28–108 mm with ventilation
- \varnothing 42–54 mm with female thread G 1/2"
- \varnothing 76.1–108 mm with female thread G 3/4"

Art. no.	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
90922	15	1	63.86
90923	18	1	62.86
90924	22	1	67.85
90925	28	1	90.65
90926	35	1	97.95
90927	42	1	130.05
90928	54	1	166.84
90929	76.1	1	289.11
90930	88.9	1	353.30
90931	108	1	432.52

Seal for Geberit Mapress pressure test plug



Technical data

Product material	NBR
------------------	-----

Art. no.	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
90341	15	1	2.07
90342	18	1	2.13
90343	22	1	2.19

Set of seals for Geberit Mapress pressure test plug



Technical data

Product material	NBR
------------------	-----

Scope of delivery

- 2 seals

Art. no.	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
90344	28	1	2.75
90345	35	1	3.05
90346	42	1	3.74
90347	54	1	4.37
90348	76.1	1	23.59
90349	88.9	1	47.39
90350	108	1	67.95

Test equipment

Geberit PowerTest



Application purposes

- For testing service-free Geberit pressing jaws

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
690.493.00.1	50	10	4.76

Accessories

BRUNOX® Turbo-Spray®



Application purposes

- For cleaning and lubricating Geberit tools

Characteristics

- Silicone-free (LABS-free)

Art. no.	Content (ml)	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90000	120	10	1	30.96

New

Geberit leak detection spray



Application purposes

- For a dry leak test

Technical data

Operating temperature	-15 – +50 °C
Product material	PPSU

Characteristics

- Suitable for all Geberit supply systems
- pH-neutral
- Non-combustible
- Does not promote corrosion

Art. no.	Content (ml)	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.942.00.1	400	12	1	11.59

Available as of April 2023










Tools

Tools for Geberit FlowFit
Hand-operated pressing tools

Tools for Geberit FlowFit

Assortment overview – Geberit FlowFit compatibility [1] and [2]

Geberit Great Britain, Version: December 2022

		Art. no.	Dimension
Hand-operated pressing pliers			
	Geberit FlowFit hand-operated pressing pliers	691.030.00.1	16 / 20 / 25 / 32 / 40 mm
Compatibility [1]			
	Geberit FlowFit pressing jaw in case	655.081.00.1	16 / 20 / 25 / 32 / 40 mm
Compatibility [2]			
	Geberit MFP 2 hand-operated pressing tool [2]	90523	
	Geberit ACO 203XLplus pressing tool [2] / [2XL], in case	691.229.P5.2	BS-1363A
	Geberit FlowFit pressing jaw in case	655.082.00.1	16 / 20 / 25 / 32 / 40 mm
		655.083.00.1	16 / 20 / 25 / 32 / 40 / 50 / 63 / 75 mm
	Geberit FlowFit case, equipped with tools [2]	655.084.00.1	16 / 20 / 25 / 32 / 40 mm

Hand-operated pressing tools

New

Geberit FlowFit hand-operated pressing pliers



Application purposes

- For pressing Geberit FlowFit pressfittings

Art. no.	d, Ø [mm]	SU1	GBP/pc.
691.030.00.1	16 / 20 / 25 / 32 / 40	1	308.15

Available as of April 2023

Accessories

- Geberit FlowFit Case for hand-operated pressing tool
- Geberit FlowFit PowerTest, in case → p. 437

Pressing tools compatibility [1]

New

Geberit FlowFit case, equipped with tools [1]



Application purposes

- For pressing Geberit FlowFit pressfittings

Scope of delivery

- Geberit FlowFit pressing jaws
- Scissors
- Pipe cutter
- Grease pencil with retractable lead, yellow
- PowerTest
- Calibration tool
- Collecting device for press indicators
- Case

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
655.078.00.1	[1]	16 / 20 / 25 / 32 / 40	1	940.09

Available as of April 2023

Pressing tools compatibility [2]

New

Geberit FlowFit case, equipped with tools [2]



Application purposes

- For pressing Geberit FlowFit pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaw
- Scissors
- Pipe cutter
- Grease pencil with retractable lead, yellow
- PowerTest
- Calibration tool
- Collecting device for press indicators
- Case

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
655.079.00.1	[2]	16 / 20 / 25 / 32 / 40 / 50 / 63 / 75	1	1875.60
655.084.00.1	[2]	16 / 20 / 25 / 32 / 40	1	875.73

Available as of April 2023



Tools

Tools for Geberit FlowFit
Pipe working tools

Pipe working tools

New

Geberit pliers



Application purposes

- For cutting Geberit Mepla system pipes PB, system pipes ML and protective tubes to length
- For cutting Geberit Volex system pipes and protective tubes to length

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
650.921.00.2	14-26	1	124.92

Available as of January 2023

Geberit cutting wheel set for pliers



Scope of delivery

- Cutting wheel
- Bolt

Art. no.	d, \emptyset [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.936.00.1	14-26	5	1	28.41

Geberit pipe cutter ML



Application purposes

- For cutting Geberit system pipes ML
- For cutting Geberit Mepla system pipes, ML, to length
- For cutting Geberit Volex system pipes, ML, to length

Characteristics

- Spare cutting wheel in handle

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
690.112.00.1	16-50	1	95.90
690.115.00.1	32-75	1	180.80

Geberit set of cutting wheels for pipe cutter ML



Scope of delivery

- 2 cutting wheels
- Axle

Art. no.	d, \emptyset [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.111.00.1	16-75	10	1	19.04

New

Geberit FlowFit calibration tool



Application purposes

- For calibrating Geberit system pipes ML

Art. no.	d, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
690.300.00.1	16 / 20 / 25 / 32 / 40	15.8	1	13.21
690.301.00.1	50 / 63 / 75	15.3	1	17.59

Available as of April 2023

Geberit grease pencil with retractable lead



Application purposes

- For marking on Geberit pipes

Characteristics

- Pressure pin with convenient one-hand operation
- Lead retractable for protection after use
- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.102.00.1	yellow	25	1	23.90

Accessories

- Geberit spare leads for grease pencil with retractable lead → p. 435

Geberit spare leads for grease pencil with retractable lead



Characteristics

- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Scope of delivery

- Box with 12 spare leads

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.103.00.1	yellow	25	1	23.90



Tools

Tools for Geberit FlowFit
Accessories

Geberit handheld bending tool, hydraulic, in case



Application purposes

- For bending Geberit system pipes ML
- For bending Geberit Mepla system pipes, ML

Characteristics

- Bending die \varnothing 26 mm suitable for system pipes ML \varnothing 25 and 26 mm

Scope of delivery


- 4 bending cheeks, \varnothing 16, 20, 26 and 32 mm
- 4 bending dies, \varnothing 16, 20, 26 and 32 mm
- Grease pencil with retractable lead, yellow
- Tongs body
- Folding rule
- Case

Art. no.	d, \varnothing [mm]	SU1	GBP/pc.
690.412.00.3	16 / 20 / 26 / 32	1	623.13

Accessories

- Geberit carrying belt for case \rightarrow p. 449

Geberit external bending spring ML



Application purposes

- For bending Geberit system pipes ML
- For bending Geberit Mepla system pipes, ML
- For bending Geberit Volex system pipes, ML

Characteristics

- Zinc-plated

Art. no.	d, \varnothing [mm]	L [cm]	SU1	GBP/pc.
690.912.00.1	16	50	1	13.07
690.913.00.1	20	50	1	16.53

Accessories

New

Geberit FlowFit pressing jaw in case



Art. no.	Compatibility	d, \varnothing [mm]	SU1	GBP/pc.
655.081.00.1	[1]	16 / 20 / 25 / 32 / 40	1	554.12
655.082.00.1	[2]	16 / 20 / 25 / 32 / 40	1	597.57
655.083.00.1	[2]	16 / 20 / 25 / 32 / 40 / 50 / 63 / 75	1	1379.83

Available as of April 2023

BRUNOX® Turbo-Spray®



Application purposes

- For cleaning and lubricating Geberit tools

Characteristics

- Silicone-free (LABS-free)

Art. no.	Content (ml)	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90000	120	10	1	30.96

New

Geberit leak detection spray



Application purposes

- For a dry leak test

Technical data

Operating temperature	-15 – +50 °C
Product material	PPSU

Characteristics

- Suitable for all Geberit supply systems
- pH-neutral
- Non-combustible
- Does not promote corrosion

Art. no.	Content (ml)	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.942.00.1	400	12	1	11.59

Available as of April 2023

New

Geberit FlowFit PowerTest, in case



Application purposes

- For testing Geberit FlowFit hand-operated pressing pliers and pressing jaws

Scope of delivery

- Support for PowerTest
- 5 test units for PowerTest
- 5 PowerTest labels for test unit
- 10 holder for test unit
- Case


Art. no.	d. ø [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.915.00.1	16 / 20 / 25 / 32 / 40	10	1	33.05
690.916.00.1	50 / 63 / 75	10	1	39.61

Available as of April 2023

Accessories

- Geberit FlowFit refill set for PowerTest → p. 438
- Geberit FlowFit support for PowerTest → p. 438

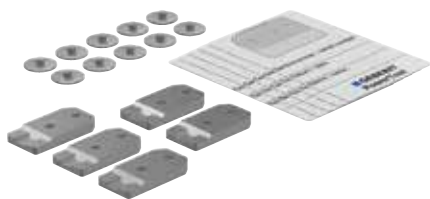

New**Geberit FlowFit refill set for PowerTest****Application purposes**

- For refilling Geberit FlowFit PowerTest

Scope of delivery

- 5 test units for PowerTest
- 5 PowerTest labels for test unit
- 10 holder for test unit

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.917.00.1	16 / 20 / 25 / 32 / 40	1	15.40
690.918.00.1	50 / 63 / 75		

Available as of April 2023

New**Geberit FlowFit support for PowerTest**














Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.937.00.1	16 / 20 / 25 / 32 / 40	1	4.42
690.938.00.1	50 / 63 / 75	1	6.61

Available as of April 2023

Tools for Geberit Mepla

Assortment overview – Geberit Mepla compatibility [1] and [2]

Geberit Great Britain, Version: December 2022




	Art. no.	Dimension
Compatibility [1]		
 Geberit ACO 103plus pressing tool [1], in case	691.017.P5.1	
	690.180.00.1	16 / 20 / 26 mm
	690.181.00.1	16 / 20 / 26 / 32 mm
	690.182.00.1	16 / 20 / 26 / 32 / 40 mm
	690.140.00.1	16 mm
	690.141.00.1	20 mm
	690.142.00.1	26 mm
	690.143.00.1	32 mm
	690.144.00.1	40 mm
Compatibility [2]		
	90523	
	691.218.P5.2	
	690.250.00.1	16 / 20 / 26 mm
	690.251.00.1	16 / 20 / 26 / 32 mm
	690.252.00.1	16 / 20 / 26 / 32 / 40 mm
	690.253.00.1	16 / 20 / 26 / 32 / 40 / 50 mm
	690.254.00.1	20 / 26 / 32 / 40 / 50 mm
	690.240.00.1	16 mm
	690.241.00.1	20 mm
	690.242.00.1	26 mm
	690.243.00.1	32 mm
	690.244.00.1	40 mm
	690.245.00.1	50 mm



Tools

Tools for Geberit Mepla Hand-operated pressing tools

Geberit Great Britain, Version: December 2022

	Art. no.	Dimension
 <p>Geberit Mepla pressing collar [2], in case</p>	690.467.00.2	63 mm
 <p>Geberit Mepla pressing collar [2]</p>	691.170.00.1	63 mm
	691.171.00.1	75 mm
 <p>Geberit ZB 203A adaptor jaw [2]</p>	691.203.00.1	35 / 42 / 50 / 54 / 63 / 66.7 / 75 mm

Hand-operated pressing tools

Geberit Mepla installation tool, in case



Application purposes

- For pressing Geberit Mepla pressfittings

Scope of delivery

- 2 hand-operated pressing pliers
- Scissors
- Geberit Mepla PowerTest
- Case

Art. no.	d, ø [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
690.485.00.4	16 / 20		1	678.97
690.486.00.4	16 / 20 / 26	16	1	979.72

Accessories

- Geberit carrying belt for case → p. 449

Geberit Mepla hand-operated pressing pliers



Application purposes

- For pressing Geberit Mepla pressfittings

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.475.00.1	16	1	253.10
690.476.00.1	20	1	253.10
690.474.00.1	26	1	305.01

Accessories

- Geberit PowerTest → p. 431

Pressing tools compatibility [1]

Geberit Mepla set of pressing jaws [1]



Application purposes

- For pressing tools with Geberit compatibility [1]
- For pressing Geberit Mepla pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [1]
- Pipe cutter
- Grease pencil with retractable lead, yellow
- PowerTest
- Deburring and calibration tool

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.180.00.1	[1]	16 / 20 / 26	1	773.32
690.181.00.1	[1]	16 / 20 / 26 / 32	1	1111.94
690.182.00.1	[1]	16 / 20 / 26 / 32 / 40	1	1373.31

Accessories

- Geberit Mepla PowerTest → p. 448



- Fit into Geberit case with case insert from 10A-III

Geberit Mepla pressing jaw [1]



Application purposes

- For pressing tools with Geberit compatibility [1]
- For pressing Geberit Mepla pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.140.00.1	[1]	16	1	197.84
690.141.00.1	[1]	20	1	211.04
690.142.00.1	[1]	26	1	232.13
690.143.00.1	[1]	32	1	250.60
690.144.00.1	[1]	40	1	287.52

Accessories

- Geberit PowerTest → p. 431



- Fit into Geberit case with case insert from 10A-III



Tools

Tools for Geberit Mepla
Pressing tools compatibility [2]

Pressing tools compatibility [2]

Geberit Mepla set of pressing jaws [2]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mepla pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Scope of delivery

- Pressing jaws [2]
- Pipe cutter
- Grease pencil with retractable lead, yellow
- PowerTest
- Deburring and calibration tool

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.250.00.1	[2]	16 / 20 / 26	1	858.46
690.251.00.1	[2]	16 / 20 / 26 / 32	1	1128.17
690.252.00.1	[2]	16 / 20 / 26 / 32 / 40	1	1430.12
690.253.00.1	[2]	16 / 20 / 26 / 32 / 40 / 50	1	1782.18
690.254.00.1	[2]	20 / 26 / 32 / 40 / 50	1	1565.96

Accessories

- Geberit case for pressing jaws [2], [3], with insert 10C-II → p. 423



- Fit into Geberit case with case insert from 10C-I, 20A-IV, 20B-III, 20D-I
- Not suitable for Geberit pressing tools PWH 40

Geberit Mepla pressing jaw [2]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mepla pressfittings

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Suitable for function test with PowerTest
- Easy maintenance and cleaning

Art. no.	Compatibility	d, ø [mm]	SU1 [pc.]	GBP/pc.
690.240.00.1	[2]	16	1	237.52
690.241.00.1	[2]	20	1	254.09
690.242.00.1	[2]	26	1	270.63
690.243.00.1	[2]	32	1	301.02
690.244.00.1	[2]	40	1	334.17
690.245.00.1	[2]	50	1	353.15

Accessories

- Geberit case for pressing jaws [2], [3], with insert 10C-II → p. 423
- Geberit PowerTest → p. 431



- Fit into Geberit case with case insert from 10C-I, 20A-IV, 20B-III, 20D-I
- Not suitable for Geberit pressing tools PWH 40

Geberit case for pressing jaws [2], [3], with insert 10C-II



Technical data

Product material	ABS
------------------	-----

Characteristics

- Can be equipped with six Geberit Mepla pressing jaws [2]
- Can be equipped with six Geberit Mapress pressing jaws [2] or [3]
- Can be equipped with Geberit Mepla deburring and calibration tool \varnothing 16–50 mm
- Can be equipped with a Geberit Mapress pipe deburrer \varnothing 12–54 mm
- Can be equipped with a Geberit Mapress pipe cutter up to \varnothing 50 mm or Geberit scissors
- Can be equipped with a Geberit Mapress pipe cutter up to \varnothing 54 mm
- Can be equipped with a Geberit Mapress insertion distance template with marker pen
- Can be equipped with a BRUNOX® Turbo-Spray® 100 ml
- Can be equipped with a Geberit grease pencil and a folding rule

Art. no.	Specification number	SU4 [pc.]	SU1 [pc.]	GBP/pc.
691.137.00.1	10C-II	24	1	128.50

Accessories

- Geberit carrying belt for case → p. 449

Geberit Mepla pressing collar [2], in case



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mepla pressfittings

Characteristics

- Can be equipped with Geberit Mepla pressing jaw \varnothing 75 mm

Scope of delivery

- Pressing collar, \varnothing 63 mm
- ZB 203A adaptor jaw [2]
- Pipe cutter
- BRUNOX® Turbo-Spray®
- Deburring tool
- Grease pencil with retractable lead, yellow
- Case

Art. no.	Compatibility	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
690.467.00.2	[2]	63	1	1316.75

Accessories

- Geberit carrying belt for case → p. 449



- Not suitable for Geberit pressing tools PWH 40



Tools

Tools for Geberit Mepla
Pipe processing tools

Geberit Mepla pressing collar [2]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing Geberit Mepla pressfittings

Characteristics

- Pressable with ZB 203A adaptor jaw [2]
- Pressable with ZB 203 adaptor jaw [2]

Art. no.	Compatibility	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
691.170.00.1	[2]	63	1	809.74
691.171.00.1	[2]	75	1	1210.84

To order additionally

- Geberit ZB 203A adaptor jaw [2] → p. 424



- Fit into Geberit case with case insert from 10D-I
- Not suitable for Geberit pressing tools PWH 40

Geberit ZB 203A adaptor jaw [2]



Application purposes

- For pressing tools with Geberit compatibility [2]
- For pressing with Geberit Mepla pressing collars [2] \emptyset 63–75 mm
- For pressing with Geberit Mapress pressing collars [2] \emptyset 35–66.7 mm

Characteristics

- Service-free
- Operable with one hand
- Zinc-plated
- Easy maintenance and cleaning

Art. no.	Compatibility	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
691.203.00.1	[2]	35 / 42 / 50 / 54 / 63 / 66.7 / 75	1	378.46



- Not suitable for Geberit pressing tools PWH 40

Pipe processing tools

Geberit Mepla pliers



Application purposes

- For cutting Geberit Mepla system pipes, ML, and protective tubes to length
- For deburring and calibrating Geberit Mepla system pipes, ML

Characteristics

- Calibration and deburring mandrel

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
690.134.00.1	16 / 20 / 26	1	151.84

Geberit cutting wheel set for pliers



Scope of delivery

- Cutting wheel
- Bolt

Art. no.	d, \emptyset [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.936.00.1	14-26	5	1	28.41

Geberit Mepla calibration and deburring mandrel set



Scope of delivery

- Bolt
- Deburring mandrel, \emptyset 16 and 26 mm
- Deburring mandrel, \emptyset 20 mm

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
690.933.00.5	16 / 20 / 26	1	35.39

Geberit pipe cutter ML



Application purposes

- For cutting Geberit system pipes ML
- For cutting Geberit Mepla system pipes, ML, to length
- For cutting Geberit Volex system pipes, ML, to length

Characteristics

- Spare cutting wheel in handle

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
690.112.00.1	16-50	1	95.90
690.115.00.1	32-75	1	180.80

Geberit set of cutting wheels for pipe cutter ML



Scope of delivery

- 2 cutting wheels
- Axle

Art. no.	d, \emptyset [mm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.111.00.1	16-75	10	1	19.04

Geberit Mepla deburring and calibration tool



Application purposes

- For deburring and calibrating Geberit Mepla system pipes, ML

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
690.212.00.1	16 / 20 / 26	1	65.75
690.211.00.1	16 / 20 / 26 / 32 / 40 / 50	1	93.99



Tools

Tools for Geberit Mepla
Pipe processing tools

Geberit deburring tool



Application purposes

- For deburring Geberit Mepla system pipes, ML

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
690.214.00.1	63 / 75	1	24.95

Geberit blade for deburring tool



Art. no.	d, \emptyset [mm]	SU2 [pc.]	GBP/pc.
690.215.00.1	63 / 75	2	9.17

Geberit grease pencil with retractable lead



Application purposes

- For marking on Geberit pipes

Characteristics

- Pressure pin with convenient one-hand operation
- Lead retractable for protection after use
- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.102.00.1	yellow	25	1	23.90

Accessories

- Geberit spare leads for grease pencil with retractable lead → p. 435

Geberit spare leads for grease pencil with retractable lead



Characteristics

- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Scope of delivery

- Box with 12 spare leads

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.103.00.1	yellow	25	1	23.90

Geberit handheld bending tool, hydraulic, in case



Application purposes

- For bending Geberit system pipes ML
- For bending Geberit Mepla system pipes, ML

Characteristics

- Bending die \varnothing 26 mm suitable for system pipes ML \varnothing 25 and 26 mm

Scope of delivery


- 4 bending cheeks, \varnothing 16, 20, 26 and 32 mm
- 4 bending dies, \varnothing 16, 20, 26 and 32 mm
- Grease pencil with retractable lead, yellow
- Tongs body
- Folding rule
- Case

Art. no.	d, \varnothing [mm]	SU1 [pc.]	GBP/pc.
690.412.00.3	16 / 20 / 26 / 32	1	623.13

Accessories

- Geberit carrying belt for case \rightarrow p. 449

Geberit external bending spring ML



Application purposes

- For bending Geberit system pipes ML
- For bending Geberit Mepla system pipes, ML
- For bending Geberit Volex system pipes, ML


Characteristics

- Zinc-plated

Art. no.	d, \varnothing [mm]	L [cm]	SU1 [pc.]	GBP/pc.
690.912.00.1	16	50	1	13.07
690.913.00.1	20	50	1	16.53

Pressure test plugs

Geberit Mepla pressure test plug for pipe end



Application purposes

- For temporarily closing Geberit Mepla pipe ends during the pressure test
- For pressure tests with cold water up to 25 bar / 2500 kPa
- For pressure tests with air up to 3 bar / 300 kPa

Characteristics

- Reusable
- O-ring made of EPDM

Technical data

Product material	Brass CW617N
------------------	--------------

Art. no.	d, \varnothing [mm]	Rp ["]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
601.485.00.1	16	1/2		5	1	15.92
602.485.00.1	20	1/2	25	5	1	22.59
603.485.00.1	26	1/2	25	5	1	24.44
604.485.00.1	32	1/2		5	1	31.01
605.485.00.1	40	1/2			1	60.20
606.485.00.1	50	1/2			1	81.14
607.485.00.1	63	1/2			1	169.23



Tools

Tools for Geberit Mepla
Test equipment

Geberit set of clamping ring and O-ring, for pressure test plug



Scope of delivery

- O-ring made of EPDM
- Clamping ring

Art. no.	d, \emptyset [mm]	SU1 [pc.]	GBP/pc.
Valid for system: Geberit FlowFit / Geberit Mepla / Geberit PushFit			
241.491.00.1	16	1	3.17
241.492.00.1	20	1	4.36
241.494.00.1	32	1	7.25
241.495.00.1	40	1	10.13
241.496.00.1	50	1	17.39
241.497.00.1	63	1	101.23
Valid for system: Geberit Mepla			
241.493.00.1	26	1	5.49

Test equipment

Geberit Mepla PowerTest



Application purposes

- For testing Geberit Mepla hand-operated pressing pliers and pressing jaws

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
690.491.00.1	50	10	3.31

Geberit PowerTest



Application purposes

- For testing service-free Geberit pressing jaws

Art. no.	SU3 [pc.]	SU2 [pc.]	GBP/pc.
690.493.00.1	50	10	4.76

Accessories

BRUNOX® Turbo-Spray®



Application purposes

- For cleaning and lubricating Geberit tools

Characteristics

- Silicone-free (LABS-free)

Art. no.	Content (ml)	SU3 [pc.]	SU1 [pc.]	GBP/pc.
90000	120	10	1	30.96

New

Geberit leak detection spray



Application purposes

- For a dry leak test

Characteristics

- Suitable for all Geberit supply systems
- pH-neutral
- Non-combustible
- Does not promote corrosion

Technical data

Operating temperature	-15 – +50 °C
Product material	PPSU

Art. no.	Content (ml)	SU2 [pc.]	SU1 [pc.]	GBP/pc.
690.942.00.1	400	12	1	11.59

Available as of April 2023

Universal cases

Universal cases

Geberit carrying belt for case



Art. no.	SU1 [pc.]	GBP/pc.
691.129.00.1	1	21.10



Appendix

Abbreviation.....	452
Sales and delivery conditions.....	453
Index	456



Abbreviation

Abbreviation	Designation
I1	length, partial dimension (cm)
L2	length (cm)
I2	length, partial dimension (cm)
L3	length (cm)
I3	length, partial dimension (cm)
La	linear expansion (cm)
IK	grip length, screw (cm)
M	metric thread (mm)
m	bolt hole diameter (cm)
n	number of bolts, flange connection (PC)
PN	nominal pressure (bar)
R	taper external thread (")
r	radius (cm)
DN	nominal width
R1	taper external thread (")
Rg	round thread (")
Rp	taper internal pipe thread (")
Rp1	taper internal pipe thread (")
Rp2	taper internal pipe thread (")
S	pipe series
s	wall thickness (mm)
s1	wall thickness (mm)
SW	spanner width (mm)
A	projection (cm)
s ISO	wall thickness (for labels) (mm)
a	partial dimension (cm)
A1	projection (cm)
V	measuring range, volumetric flow rate (l/min)
a1	partial dimension (cm)
AB	connection area (mm)
AB1	connection area (mm)
AB2	connection area (mm)
Acm ²	clear cross-sectional area (cm ²)
AD	connecting distance (cm)
arc	angle (°)
AD1	connecting distance (cm)
B	width (cm)
b	partial dimension (cm)
B1	width (cm)
c	flange hole diameter (mm)
d, ø	outer diameter (mm)
UNC	inch thread
D	outer diameter (cm)
d1, ø	outer diameter (mm)

Abbreviation	Designation
D1	outer diameter (cm)
d2, ø	outer diameter (mm)
d3, ø	outer diameter (mm)
da	outer pipe diameter (mm)
di, ø	inner diameter (mm)
DN/OD	nominal width
DN	nominal width
E	insertion depth (cm)
E1	insertion depth (cm)
G	pipe thread (")
G1	pipe thread (")
X	leg length / L-dimension (cm)
X1	leg length / L-dimension (cm)
G2	pipe thread (")
X2	leg length / L-dimension (cm)
H	height (cm)
X3	leg length / L-dimension (cm)
h	height, partial dimension (cm)
H1	height (cm)
X4	leg length / L-dimension (cm)
h1	height, partial dimension (cm)
X5	leg length / L-dimension (cm)
h2	height, partial dimension (cm)
h3	height, partial dimension (cm)
k	flange, diameter of bolt circle (cm)
X6	leg length / L-dimension (cm)
Z	Z-dimension (cm)
Z1	Z-dimension (cm)
Z2	Z-dimension (cm)
Z3	Z-dimension (cm)
Z4	Z-dimension (cm)
K	maximum cutting (cm)
Z5	Z-dimension (cm)
K1	maximum cutting (cm)
Z6	Z-dimension (cm)
K2	maximum cutting (cm)
K3	maximum cutting (cm)
KL	cable length (cm)
L	length (cm)
l	length, partial dimension (cm)
L	L / length (m)
L1	length (cm)

Sales and delivery conditions

GENERAL

1. In these Conditions of Sale "The Company" means Geberit Sales Ltd "the Customer" means the person, firm or company with whom The Company contracts. "The Contract" Any contract between The Company and the Customer for the sale and purchase of the Goods incorporating the Conditions (including any part or parts of them). "The Goods" Any Goods agreed in the Contract to be supplied to the Customer by The Company (including any part or parts of them).
2. These Conditions of Sale apply to and govern any contract between The Company and the Customer to the exclusion of any other conditions contained on, or in, any letter, order form, receipt of similar document emanating from the Customer. No variation of these Conditions of Sale shall be effective unless expressly agreed by The Company in writing.
3. (a) All quotations are for information only and are not to be considered as an offer by The Company. No Contract shall come into existence until an order by the Customer has been accepted by The Company.
(b) Acceptance by The Company of any order shall be on the basis that Goods will be invoiced at the prices contained in The Company's price list current at the date of despatch unless otherwise agreed in writing by The Company.
4. (a) Except where otherwise stated in the contract or in The Company's current price list all prices include the cost of packaging and delivery (but not installation). The Company reserves the right to make additional charges if the Customer requires a method of packaging or delivery different from that normally employed by The Company.
(b) The Customer shall, in addition to the net purchase price, pay to The Company the amount of any Value Added Tax or other sales tax at the rate in force at the time the Goods are invoiced.
5. **PAYMENT**
(a) All Goods will be invoiced at the time of, or soon after, despatch. Payment for the Goods must be received by The Company not later than the last day of the month following the date of the invoice. In the event of late payment, The Company reserves the right to charge interest at a rate of 2% per month.

(b) In the event of the Customer postponing delivery, or requesting that The Company suspend the manufacture of the Goods, or failing to give The Company sufficient information to enable it to process any order, the Customer shall pay any additional costs and expenses thereby incurred by The Company.

(c) Unless otherwise agreed in writing by The Company the Customer shall not be entitled to set off against any moneys due to The Company under the Contract any sums claimed by or due to the Customer from The Company under the Contract or any other Contract between The Company and the Customer.

6. ILLUSTRATION AND DIMENSIONS

- (a) All information and illustrations contained in brochures, catalogues, price lists, trade literature and advertising material produced by The Company are approximate only, intended to indicate only the general character of the Goods, and do not form any part of any contract between The Company and the Customer.
- (b) The dimensions of the Goods are subject to manufacturing tolerances customary within the trade. Dimensions contained in quotations, acknowledgements of orders, or catalogues, price lists, advertising matter and other trade literature are therefore approximate only.

7. SUBSTITUTED GOODS

The Company reserves the right to substitute Goods which are similar to the Goods ordered by the Customer provided that such substituted Goods are no less suitable for the purpose for which they are generally used than Goods ordered by the Customer.

DELIVERY

8. The Company cannot offer a timed delivery service, although we will try to meet the customer needs wherever possible. Any deliveries required outside our delivery schedule will be at the customer's expense.
9. Delivery shall be made to the Customer's premises only.
10. The Customer shall be responsible for unloading the Goods at the point of delivery.
11. The Customer will confirm the goods are received at the time of delivery by signing the Proof Of Delivery document (POD) providing a signature, date and printed name.
12. Immediately on collection or delivery, whichever is appropriate, the Customer shall examine the goods. Any shortages, damages or other delivery discrepancies must be notified directly to the Customer Support team in writing within three working days of delivery or collection. Credits will not be given if a POD has been signed and there have been no reported anomalies within 3 working days of the delivery date.
13. The Company will use its best endeavours to comply with any delivery date, however, collection or delivery dates and times indicated by the Company shall be regarded as best estimates only. The Company cannot be responsible for any loss or damage whatsoever caused by late delivery where circumstance beyond The Company's control have caused such delay.
14. The Company operates a minimum delivery value requirement for deliveries to the Customer's premises. This currently stands at £300.
15. Orders placed below the minimum order value will be subject to a £10 minimum order value charge.
16. Express orders should be placed before our cut offs for delivery the next day. These orders are subject to a carriage charge to the customer and will be priced based on weight.

17. RETURNS

The Company does not operate a returns policy for saleable stock or for stock that is defective or damaged upon receipt. Any agreed stock return is at the discretion of The Company and only with prior written consent. Where such consent is given, a handling charge of a minimum of 30% of invoiced value will be made.



18. RISK AND RETENTION OF OWNERSHIP

The risk in the Goods contracted to be sold by The Company shall pass to the Customer when the Goods are delivered to or collected by the Customer.

(a) Notwithstanding any passing of risk to the Customer, The Company retains ownership of the Goods the subject matter of this Contract the property in which shall not pass to the Customer and the Customer shall keep any Goods delivered to it as bailee for and on behalf of The Company until The Company has received full payment of the price of all Goods (whether or not the Goods are delivered in instalments and some have been paid for by the Customer).

(b) Until ownership of the Goods has passed to the Customer the Customer;

(i) shall insure the Goods against any loss or damage with an insurance office of repute.

(ii) shall store the Goods separately or in some other way ensure that they are readily identifiable as the property of The Company.

(iii) irrevocably authorise the representative of The Company at any time and from time to time (whether or not payment is due) to repossess the Goods and for such purpose to enter any premises occupied by the Customer or where the Goods are or are thought to be and to sever the Goods from anything to which they are attached without being responsible for any damage caused.

(iv) shall keep the Goods free from any charge, lien or other encumbrance.

(c) If, while under The Company's ownership, the Goods or any of them are processed or incorporated into other Goods ("the New Goods") then, provided the Goods remain a readily identifiable and removable part of the New Goods, the provisions of conditions (a) and (b) shall apply.

(d) The Company (acting on its own account, not as agent for the Customer) may sell or agree to sell any of the Goods or the New Goods in The Company's possession on such terms as it may in its sole discretion consider appropriate.

(e) The Company shall be entitled to a general lien over all Goods and materials of the Customer which is in The Company's possession or control from time to time for any sums due at any time whatsoever to The Company.

(f) Nothing in this condition shall confer any right upon the Customer to refuse or delay payment therefore.

19. LIMITATION OF LIABILITIES

(a) Goods may be delivered in cartons, bundles, returnable containers, loose or in other packaging. In any case where it is established to the satisfaction of The Company that the Goods have been damaged or lost (whether wholly or in part) in transit The Company will, at its own cost, repair or replace same provided that

(i) in the case of partial loss or damage, the Customer has returned to The Company's representative (or where the Goods have been delivered by a Carrier his representative) The Company' receipt note duly signed by the Customer's representative and indicating thereon as shortage of or damage to cartons, bundles, returnable containers, loose Goods or other such packages as shall make up the delivery and full particulars are notified directly to The Company in writing within three working days of delivery;

(ii) in the case of damage, the Goods and their packaging are retained by the Customer for inspection by The Company's representative. The Company will not be liable for any loss or damage in transit, except as above.

(b) Where it is established to the satisfaction of The Company

that Goods delivered by them or collected by the Customer, contain at the time of receipt by the Customer some defect in quality (not being a defect caused by some act or neglect of the Customer or a third party) and the Goods are returned to The Company at the Customer's expense within three months of despatch to the Customer, The Company will at its own cost repair or replace them (the choice being at The Company's option).

(c) Save as aforesaid and to the extent permitted by law The Company will not be liable to the Customer for any loss or damage whatsoever suffered as a result of a defect in quality or defective installation or the fact that the Goods are not fit for a particular purpose save for the conditions implied by section 12 of the Sale of Goods Act 1979 and without prejudice to the generality of the foregoing any implied term, condition or warranty statutory or otherwise as to the quality of the Goods sold or their fitness for any particular purpose or as to their correspondence with any description or sample is hereby excluded.

No warranty or representation given by or on behalf of The Company including without prejudice to the generality of the foregoing any advice as to the installation quantities use or performance of Goods supplied by The Company shall be binding upon The Company unless specifically stated in writing by The Company to be incorporated in the contract. Nothing in these Conditions excludes or limits the liability of The Company for death or personal injury caused by The Company's negligence or fraudulent misrepresentation.

20. CONSEQUENTIAL LOSS

Without prejudice to the generality of the foregoing provisions The Company shall not in any event be liable to the Customer for any indirect or consequential loss of or damage (whether for loss of profit, loss of business, depletion of goodwill or otherwise) costs, expenses or other claims for consequential compensation whatsoever (howsoever caused) which arise out of or in connection with the Contract.

21. INSOLVENCY AND BREACH OF CONTRACT

The Company shall have the option (without prejudice to any of its other rights against the Customer) by notice in writing to the Customer to rescind the contract or to suspend delivery in the following events:

(i) should any sum owing by the Customer to The Company be overdue.

(ii) should the Customer be in breach of any term of the contract with The Company.

(iii) should the Customer enter into any composition or arrangement with, or for the benefit of its creditors or have a receiving order in bankruptcy made against him or (if a body corporate) should it go into liquidation either voluntary or compulsory or under supervision or have a receiver and/or manager administrative receiver or administrator appointed over all or any part of its assets, or in Scotland should the Customer become notour bankrupt, or sequestrated, or a receiver, or judicial factor, or trustee is appointed, for any portion of the Customer's estate or effects or suffer any arrestment charge pending or other diligence to be issued or levied upon the Customer his estate or effects.

22. HEALTH AND SAFETY

As The Company is under a duty pursuant to S 6 of the Health and Safety at Work Act 1974 in respect of the design, manufacture and supply of any article for use at work, the Customer shall be deemed to have been afforded by The Company reasonable opportunity for the testing and examination of Goods or materials in respect of their safety and risk to health prior to delivery to the Customer, and he shall be deemed to have been afforded by The Company adequate information about the Goods and materials in respect of the use for which they are designed, and have been tested, and of any conditions necessary to ensure that when put to that use they will be safe and without risk to health, whether or not the said information has been requested by the Customer.

23. INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS

The Company is the proprietor or beneficial owners of patents, registered designs, trademarks and tradenames, copyright or other industrial or intellectual property rights relating to the Goods and The Company reserves all such rights to itself and no authorisation of licence is granted to the Customer to use the Goods or any drawing or specifications relating to the same provided to the Customer by The Company otherwise than for the purpose provided.

24. FORCE MAJEURE

The Company reserves the right to defer the date of delivery or to cancel the Contract or reduce the volume of the Goods ordered by the Customer (without liability to the Customer) if it is prevented from or delayed in the carrying on of its business due to circumstances beyond the reasonable control of the Company including without limitation, acts of God, Governmental actions, war or national emergency, riot, civil commotion, fire, explosion, flood, epidemic, lock out, strikes or other labour disputes (whether or not relating to either party's workforce) or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate suitable materials.

25. WAIVER

Forbearance or indulgence by The Company shown or granted to the Customer whether in respect of these Conditions of Sale or otherwise, shall not affect or prejudice the rights of The Company against the Customer or be taken as a waiver of any of these Conditions of Sale.

26. GOVERNING LAW

Any contract incorporating these Conditions of Sale shall be governed by and construed in accordance with the laws of England and The Company and the Customer hereby agree to submit to the jurisdiction of the English Courts.

27. HEADNOTES

The head notes to these Conditions have been inserted for convenience and shall not affect their construction.

Geberit Sales Ltd
Geberit House, Edgehill Drive
Warwick, Warwickshire
CV34 6NH
Effective July 2018



Index

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
12412	133	20311	126	21008	127	21239	129
12413	133	20401	126	21009	127	21240	129
12414	133	20402	126	21010	127	21241	129
12415	133	20403	126	21011	127	21244	129
12416	133	20404	126	21012	127	21245	129
12417	133	20405	126	21101	128	21246	129
12418	133	20406	127	21103	128	21247	129
12419	133	20407	127	21104	128	21248	129
12420	133	20408	127	21105	128	21249	129
12421	133	20501	136	21107	128	21250	129
19201	120	20502	136	21121	130	21301	129
19202	120	20503	136	21122	130	21302	129
19203	120	20505	136	21123	130	21304	129
19204	120	20507	136	21127	130	21305	129
19205	120	20508	136	21128	130	21307	129
19206	121	20551	137	21130	130	21308	129
19207	121	20552	137	21131	130	21309	129
19208	121	20553	137	21133	130	21310	129
19404	121	20555	137	21134	130	21311	129
19405	121	20557	137	21201	128	21312	129
19406	121	20558	137	21202	128	21313	129
19407	121	20559	137	21203	128	21314	129
19408	121	20560	137	21204	128	21316	129
19409	121	20561	137	21205	128	21317	129
19410	121	20562	137	21206	128	21318	129
19411	121	20601	125	21207	128	21320	129
20101	125	20602	125	21208	129	21321	129
20102	125	20603	125	21209	128	21322	129
20103	125	20604	125	21210	128	21324	129
20104	125	20605	125	21211	128	21325	129
20105	125	20609	125	21212	128	21326	129
20109	125	20610	125	21213	128	21329	129
20110	125	20611	125	21214	128	21331	129
20111	125	20612	125	21215	128	21334	129
20112	125	20701	126	21216	128	21336	129
20211	143	20702	126	21217	128	21341	130
20212	143	20703	126	21218	128	21342	130
20213	143	20704	126	21219	128	21343	130
20214	143	20705	126	21220	128	21344	130
20215	143	20709	126	21221	128	21345	130
20216	143	20710	126	21222	128	21346	130
20217	143	20711	126	21223	129	21404	131
20218	143	20801	127	21224	129	21406	131
20219	143	20802	127	21225	129	21409	131
20220	143	20803	127	21226	129	21504	131
20221	143	20804	127	21229	129	21505	131
20222	143	20805	127	21230	129	21506	131
20301	126	21001	127	21231	129	21507	131
20302	126	21002	127	21232	129	21509	131
20303	126	21003	127	21233	129	21510	131
20304	126	21004	127	21234	129	21512	131
20305	126	21005	127	21236	129	21609	135
20309	126	21006	127	21237	129	21610	135
20310	126	21007	127	21238	129	21611	135

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
21612	135	21907	135	22112	123	23617	202
21613	135	21908	135	22301	124	23706	126
21615	135	21910	135	22302	124	23707	126
21618	135	21912	135	22303	124	23708	126
21659	136	21914	135	22304	124	23715	195
21660	136	21916	135	22305	124	23716	195
21661	136	21918	135	22306	124	23717	195
21662	136	21920	135	22307	124	23718	195
21700	133	21922	135	22308	124	23719	195
21701	133	21930	134	22309	124	23720	195
21702	133	21931	134	22310	124	23721	195
21703	133	21932	134	22311	124	23744	140
21704	133	21933	134	22312	124	23745	140
21705	133	21934	134	22313	124	23746	140
21707	133	21935	134	22315	124	23747	140
21708	133	21936	134	22316	124	23748	140
21709	133	21937	134	22317	124	23749	140
21710	133	21938	134	22318	124	23750	140
21711	133	21939	134	22320	124	23751	140
21712	133	21940	134	22321	124	23754	141
21713	133	22001	122	22322	124	23755	141
21714	133	22002	122	22323	124	23756	141
21715	133	22003	122	22324	124	23757	141
21716	133	22004	122	22327	124	23758	141
21717	133	22005	122	22330	124	23759	141
21719	133	22006	122	22331	124	23760	141
21720	133	22007	122	22332	124	23761	141
21721	133	22008	122	22338	124	23762	141
21722	133	22009	122	22339	124	23764	141
21724	133	22010	122	22345	124	23765	141
21725	133	22011	122	22346	124	23766	141
21727	133	22012	122	22348	124	23767	141
21800	134	22023	123	22349	124	23768	141
21801	134	22024	123	22421	40	23769	141
21802	134	22025	123	22422	40	23770	141
21803	134	22050	122	22423	40	23771	141
21804	134	22051	122	22431	40	23784	142
21805	134	22052	122	22432	40	23785	142
21806	134	22053	122	22433	40	23786	142
21807	134	22054	122	22444	40	23787	142
21808	134	22055	122	23106	125	23788	142
21809	134	22056	122	23107	125	23789	142
21810	134	22057	122	23108	125	23790	142
21811	134	22058	122	23306	126	23791	142
21814	134	22059	122	23307	126	23799	357
21818	134	22101	123	23308	126	23932	142
21820	134	22102	123	23509	136	23933	142
21823	134	22103	123	23510	136	23934	142
21824	134	22104	123	23511	136	23935	142
21827	134	22105	123	23602	146	23936	142
21901	135	22106	123	23603	146	23937	142
21902	135	22107	123	23604	146	23938	142
21903	135	22108	123	23606	125	23939	142
21904	135	22109	123	23607	125	23940	142
21905	135	22110	123	23608	125	23941	142
21906	135	22111	123	23615	202	24002	146



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
24003	146	29102	120	30873	20	31218	23
24004	146	29103	120	30874	20	31219	23
24005	202	29104	120	30875	20	31220	23
24006	202	29105	120	30876	20	31221	23
24007	202	29106	120	30877	20	31222	23
24045	147	29107	120	30878	20	31223	23
24046	147	29108	120	30892	20	31224	23
24047	147	29158	120	30893	20	31225	23
24055	203	29159	120	30894	20	31226	23
24056	203	29160	120	30905	20	31227	22
24057	203	29161	120	30906	20	31228	22
25032	139	30009	20	30907	20	31229	23
25033	139	30010	20	30908	20	31230	23
25034	139	30011	20	30932	20	31231	23
25035	139	30029	20	30933	20	31232	23
25036	139	30030	20	30934	20	31233	23
25037	139	30031	20	30935	20	31234	22
25038	139	30049	20	30936	20	31235	23
25040	139	30050	20	30937	20	31236	23
25042	139	30051	20	30938	20	31237	23
25044	139	30069	20	30942	20	31238	23
25045	139	30070	20	30943	20	31239	23
25046	139	30071	20	30944	20	31240	23
25048	139	30089	20	30955	20	31241	23
25049	139	30090	20	30956	20	31242	23
25050	139	30091	20	30957	20	31243	23
25051	139	30102	18	30958	20	31244	23
25052	139	30103	18	31002	22	31245	23
25053	139	30104	18	31003	22	31246	23
25054	139	30105	18	31004	22	31247	23
25055	139	30302	19	31005	22	31248	23
25300	138	30303	19	31006	22	31249	23
25302	138	30304	19	31007	22	31250	23
25304	138	30305	19	31008	22	31251	23
25305	138	30402	20	31009	22	31304	24
25306	138	30403	20	31010	22	31305	24
25307	138	30404	20	31011	22	31306	24
25308	138	30405	20	31106	18	31307	24
25309	138	30406	20	31107	18	31308	24
25319	137	30407	20	31108	18	31309	24
25320	137	30408	20	31109	18	31310	24
25321	137	30414	21	31110	18	31311	24
25322	137	30415	21	31111	18	31312	24
25323	137	30602	18	31204	22	31313	24
25324	137	30603	18	31206	22	31316	24
25325	137	30604	18	31207	22	31317	24
25326	137	30605	18	31208	22	31320	24
25329	138	30702	19	31209	22	31321	24
25330	138	30703	19	31210	22	31324	24
25332	138	30704	19	31211	23	31326	24
25335	138	30705	19	31212	23	31329	24
25337	138	30802	21	31213	23	31331	24
25338	138	30803	21	31214	23	31334	24
25339	138	30804	21	31215	23	31336	24
25340	138	30805	21	31216	23	31339	24
29101	120	30872	20	31217	23	31401	24

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
31454	24	31939	29	32345	17	33423	46
31455	24	31940	29	32346	17	33425	46
31458	24	32002	16	32348	17	33427	46
31461	24	32003	16	32412	25	33503	46
31464	24	32004	16	32413	25	33732	40
31703	28	32005	16	32414	25	33733	40
31704	28	32006	16	32415	25	33734	40
31705	28	32007	16	32416	25	33735	40
31707	28	32008	16	32417	25	33736	40
31708	28	32009	16	32418	25	33737	40
31709	28	32010	16	32419	25	33738	40
31710	28	32011	16	32420	25	33739	40
31711	28	32050	15	32421	25	33740	40
31713	28	32051	15	32606	18	33741	40
31714	28	32052	15	32607	18	33744	41
31715	28	32053	15	32608	18	33745	41
31716	28	32054	15	32609	18	33746	41
31717	28	32055	15	32610	18	33747	41
31718	28	32056	15	32611	18	33748	41
31719	28	32057	15	32706	19	33749	41
31720	28	32058	15	32707	19	33750	41
31721	28	32059	15	32708	19	33752	41
31722	28	32102	16	32709	19	33802	31
31724	28	32103	16	32710	19	33803	31
31726	28	32104	16	32711	19	33804	31
31731	28	32105	16	33001	16	33805	31
31732	28	32106	16	33002	17	33806	31
31733	28	32107	16	33003	17	33807	31
31734	28	32108	16	33004	17	33808	31
31735	28	32109	16	33005	22	33833	30
31736	28	32110	16	33006	22	33834	30
31737	28	32111	16	33007	22	33835	30
31801	29	32303	17	33008	22	33836	30
31802	29	32305	17	33009	28	33837	30
31803	29	32306	17	33010	29	33838	30
31804	29	32307	17	33013	45	33839	30
31805	29	32308	17	33203	31	33846	30
31806	29	32309	17	33212	43	33848	30
31807	29	32310	17	33213	43	33850	30
31809	29	32311	17	33214	43	33852	30
31811	29	32312	17	33215	43	33854	30
31814	29	32313	17	33216	43	33860	30
31818	29	32314	17	33217	43	33862	30
31819	29	32315	17	33218	43	33864	30
31820	29	32316	17	33219	43	33932	42
31821	29	32317	17	33220	43	33933	42
31822	29	32318	17	33221	43	33934	42
31823	29	32319	17	33306	19	33935	42
31824	29	32320	17	33307	19	33936	42
31825	29	32321	17	33308	19	33937	42
31826	29	32322	17	33309	19	33938	42
31932	29	32323	17	33310	19	33939	42
31933	29	32324	17	33311	19	33940	42
31936	29	32331	17	33403	45	33941	42
31937	29	32338	17	33405	45	34000	51
31938	29	32339	17	33407	45	34001	51



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
34002	51	34073	56	34142	56	34286	54
34003	51	34074	56	34143	56	34287	54
34007	51	34075	56	34144	58	34296	50
34008	51	34076	56	34145	58	34297	50
34009	51	34077	56	34146	58	34298	50
34010	51	34078	56	34147	58	34346	56
34014	50	34083	57	34148	58	34347	57
34015	50	34084	57	34149	58	34355	55
34016	50	34086	57	34150	58	34400	60
34017	50	34087	57	34151	58	34401	60
34021	51	34089	57	34152	58	34402	60
34022	51	34090	57	34153	58	34403	60
34023	51	34091	57	34154	58	34404	60
34024	51	34092	57	34158	60	34405	60
34028	54	34093	57	34159	60	34406	60
34029	54	34097	55	34161	60	34407	60
34030	54	34098	55	34162	49	34408	60
34031	54	34099	55	34169	57	34409	60
34032	54	34101	49	34170	57	34430	59
34033	54	34102	49	34187	51	34431	59
34034	54	34103	49	34188	51	34432	59
34035	54	34104	49	34189	51	34433	59
34036	54	34105	49	34190	51	34434	59
34037	54	34106	49	34191	51	34435	59
34038	54	34107	49	34192	51	34436	59
34039	54	34108	49	34193	51	34437	59
34040	54	34109	49	34194	51	34438	59
34041	54	34110	49	34195	51	34439	59
34042	54	34111	49	34196	51	34440	59
34043	54	34112	49	34197	51	34441	51
34044	54	34113	49	34198	51	34442	51
34045	54	34114	49	34204	61	34443	51
34046	54	34115	50	34205	61	34444	51
34047	54	34116	50	34206	61	34445	51
34048	54	34117	50	34207	61	34446	51
34049	54	34118	50	34208	61	34447	51
34050	54	34119	50	34209	61	34448	51
34051	54	34120	50	34210	61	34449	51
34052	55	34121	49	34211	61	34450	51
34053	55	34122	49	34212	62	34451	51
34054	55	34123	50	34214	61	34452	51
34055	55	34124	50	34248	49	34462	63
34056	55	34126	55	34249	49	34463	63
34057	55	34127	50	34250	49	34464	63
34058	55	34128	50	34259	50	34465	63
34059	55	34129	50	34260	50	34466	63
34060	55	34132	50	34261	50	34467	63
34061	55	34133	50	34264	55	34468	63
34063	55	34134	50	34265	55	34469	63
34066	56	34135	50	34266	55	34470	63
34067	56	34136	63	34267	55	34471	63
34068	56	34137	63	34268	55	34500	206
34069	56	34138	63	34269	55	34501	206
34070	56	34139	63	34270	55	34502	206
34071	56	34140	54	34271	55	34503	206
34072	56	34141	54	34285	54	34504	206

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
34505	206	34607	204	34736	209	35340	37
34506	206	34608	205	34737	209	35350	39
34507	206	34609	205	34738	209	35351	39
34508	206	34610	205	34739	209	35352	39
34509	206	34611	205	34740	209	35353	39
34510	206	34612	205	34752	212	35354	39
34511	207	34613	205	34753	212	35355	39
34512	207	34614	205	34754	212	35356	39
34513	207	34615	205	34755	212	35357	39
34514	206	34616	205	34756	212	35358	39
34515	206	34617	205	34757	212	35359	39
34516	206	34618	205	34758	212	35360	37
34517	206	34619	205	35032	36	35361	37
34518	206	34620	205	35033	36	35362	37
34519	206	34623	205	35034	36	35363	37
34520	206	34624	205	35035	36	35364	37
34521	206	34625	205	35036	36	35365	37
34522	206	34626	205	35037	36	35366	37
34523	206	34627	205	35038	36	35367	37
34524	206	34628	205	35039	36	35368	37
34525	206	34629	205	35040	36	35369	37
34526	206	34666	209	35042	36	35370	37
34527	206	34667	209	35044	36	35380	39
34528	208	34669	209	35045	36	35382	39
34529	208	34670	209	35046	36	35384	39
34530	208	34671	209	35047	36	35386	39
34531	208	34672	209	35075	36	35387	39
34532	208	34673	209	35132	36	35388	39
34533	208	34674	209	35134	36	35389	39
34534	208	34675	209	35300	38	35390	35
34535	208	34676	209	35301	38	35391	35
34536	208	34677	209	35302	38	35392	35
34537	208	34678	209	35303	38	35393	35
34543	208	34679	209	35304	38	35394	35
34544	208	34683	210	35305	38	35395	35
34545	208	34684	210	35306	38	35396	35
34546	208	34685	210	35307	38	35400	38
34547	208	34686	210	35308	38	35402	38
34548	208	34687	210	35309	38	35405	38
34549	208	34688	210	35320	35	35407	38
34550	208	34689	210	35321	35	35408	38
34551	208	34690	210	35322	35	35409	38
34552	211	34691	210	35323	35	35410	38
34553	208	34692	210	35324	35	36101	18
34554	208	34693	210	35325	35	36103	18
34556	211	34715	212	35326	35	36104	18
34557	211	34725	211	35330	37	36105	18
34588	208	34726	211	35331	37	36106	18
34589	208	34727	211	35332	37	36107	18
34590	208	34728	211	35333	37	36108	18
34601	204	34729	211	35334	37	36109	18
34602	204	34730	211	35335	37	36110	18
34603	204	34731	213	35336	37	36111	19
34604	204	34732	213	35337	37	36113	19
34605	204	34733	213	35338	37	36114	19
34606	204	34735	209	35339	37	36115	19



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
36116	19	39002	14	50146	86	50336	90
36117	19	39003	14	50147	86	50337	90
36118	19	39004	14	50150	86	50338	90
36119	19	39005	14	50151	86	50341	90
36120	19	39006	14	50152	86	50342	90
36121	18	39007	14	50153	86	50343	90
36123	18	39008	14	50164	86	50356	91
36124	18	39009	14	50167	86	50357	91
36125	18	39010	14	50168	86	50359	91
36126	18	39011	14	50169	86	50362	91
36127	18	39102	15	50171	86	50364	91
36128	18	39103	15	50172	86	50366	91
36129	18	39104	15	50222	87	50367	91
36130	18	39105	15	50223	87	50368	91
36131	19	39106	15	50224	87	50369	91
36133	19	39107	15	50225	87	50370	91
36134	19	39108	15	50226	87	50371	91
36135	19	39112	47	50227	87	50372	91
36136	19	39113	47	50228	87	50373	91
36137	19	39114	47	50231	87	50374	91
36138	19	39115	47	50232	87	50375	91
36139	19	39116	47	50233	87	50376	91
36140	19	39117	47	50242	88	50377	91
36141	42	39118	47	50243	88	50378	91
36142	42	39609	15	50244	88	50379	91
36143	42	39610	15	50245	88	50380	91
36144	42	39611	15	50246	88	50381	91
36145	42	50062	85	50247	88	50389	91
36146	42	50063	85	50248	88	50390	91
36147	42	50064	85	50251	88	50391	91
36148	42	50065	85	50252	88	50392	91
36150	41	50066	85	50253	88	50393	91
36151	41	50067	85	50282	87	50395	91
36152	41	50068	85	50283	87	50396	91
36153	41	50071	85	50284	87	50397	91
36154	41	50072	85	50285	87	50398	91
36155	41	50073	85	50286	87	50399	91
36156	41	50082	85	50287	87	50401	91
36161	18	50083	85	50288	87	50402	91
36163	18	50084	85	50291	87	50403	91
36164	18	50085	85	50292	87	50404	91
36165	18	50086	85	50293	87	50405	91
36166	18	50087	85	50312	88	50407	91
36167	18	50088	85	50313	88	50408	91
36168	18	50091	85	50314	88	50413	92
36169	18	50092	85	50315	88	50414	92
36170	18	50093	85	50316	88	50415	92
36171	19	50133	86	50317	88	50416	92
36173	19	50134	86	50318	88	50417	92
36174	19	50135	86	50321	88	50418	92
36175	19	50136	86	50322	88	50419	92
36176	19	50137	86	50323	88	50420	92
36177	19	50138	86	50332	90	50421	92
36178	19	50141	86	50333	90	50422	92
36179	19	50142	86	50334	90	50424	92
36180	19	50145	86	50335	90	50425	92

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
50427	92	50564	97	50754	102	51151	152
50428	92	50565	97	50755	102	51152	152
50429	92	50566	97	50756	102	51153	152
50437	92	50567	97	50757	102	51164	152
50438	92	50568	97	50758	102	51167	152
50440	92	50570	97	50761	102	51168	152
50441	92	50571	97	50762	102	51169	152
50443	92	50572	97	50763	102	51171	152
50444	92	50573	97	50772	96	51172	152
50453	93	50581	97	50773	96	51222	152
50454	93	50582	97	50774	96	51223	152
50455	93	50583	97	50775	96	51224	152
50456	93	50584	97	50776	96	51225	152
50457	93	50585	97	50777	96	51226	153
50458	93	50586	97	50778	96	51227	153
50459	93	50587	97	50780	404	51228	153
50460	93	50588	97	50782	404	51231	153
50461	93	50589	97	50783	404	51232	153
50462	93	50590	97	50784	404	51233	153
50463	93	50591	97	50785	404	51242	153
50464	93	50611	98	50786	404	51243	153
50465	93	50612	98	50787	404	51244	153
50466	93	50613	98	50788	404	51245	153
50467	93	50615	98	50789	404	51246	153
50468	93	50616	98	51062	151	51247	153
50471	93	50617	98	51063	151	51248	153
50472	93	50618	98	51064	151	51251	153
50474	93	50619	98	51065	151	51252	153
50480	94	50620	98	51066	151	51253	153
50484	94	50631	98	51067	151	51282	153
50485	94	50632	98	51068	151	51283	153
50486	94	50633	98	51071	151	51284	153
50487	94	50634	98	51072	151	51285	153
50488	94	50635	98	51073	151	51286	153
50489	94	50636	98	51082	151	51287	153
50490	94	50637	98	51083	151	51288	153
50491	94	50638	98	51084	151	51291	153
50492	94	50639	98	51085	151	51292	153
50493	94	50640	98	51086	151	51293	153
50494	94	50653	99	51087	151	51312	153
50495	94	50656	99	51088	151	51313	153
50498	94	50661	99	51091	151	51314	153
50500	94	50664	99	51092	151	51315	153
50524	95	50665	99	51093	151	51316	153
50526	95	50667	99	51133	152	51317	153
50529	95	50673	100	51134	152	51318	153
50532	95	50674	100	51135	152	51321	153
50533	95	50675	100	51136	152	51322	153
50534	95	50676	100	51137	152	51323	153
50535	95	50677	100	51138	152	51332	155
50544	95	50678	100	51141	152	51333	155
50546	95	50679	100	51142	152	51334	155
50549	95	50680	100	51145	152	51335	155
50552	95	50681	100	51146	152	51336	155
50553	95	50752	102	51147	152	51337	155
50562	97	50753	102	51150	152	51338	155



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
51341	155	51468	157	51778	160	52332	218
51342	155	51484	158	52062	214	52333	218
51343	155	51486	158	52063	214	52334	218
51356	155	51488	158	52064	214	52335	218
51357	155	51489	158	52065	214	52336	218
51359	155	51490	158	52066	214	52337	218
51362	155	51491	158	52067	214	52338	218
51364	155	51492	158	52068	214	52356	218
51366	155	51493	158	52082	215	52359	218
51367	155	51495	158	52083	215	52366	218
51368	155	51498	158	52084	215	52369	218
51369	155	51500	158	52085	215	52370	218
51370	155	51532	159	52086	215	52373	218
51373	155	51552	159	52087	215	52374	218
51374	155	51562	160	52088	215	52375	218
51375	155	51564	160	52133	215	52378	218
51378	155	51567	160	52134	215	52379	218
51379	155	51570	160	52135	215	52380	218
51380	155	51571	160	52136	215	52413	219
51381	155	51572	160	52137	215	52414	219
51390	155	51573	160	52138	215	52416	219
51391	155	51611	161	52141	215	52418	219
51392	155	51613	161	52142	215	52421	219
51393	155	51615	161	52145	215	52424	219
51396	155	51617	161	52146	215	52427	219
51397	155	51618	161	52147	215	52453	219
51398	155	51619	161	52152	215	52454	219
51399	155	51620	161	52153	215	52455	219
51405	155	51653	161	52222	216	52456	219
51407	155	51656	161	52223	216	52457	219
51408	155	51661	161	52224	216	52458	219
51413	156	51665	161	52225	216	52460	219
51414	156	51667	161	52226	216	52461	219
51416	156	51675	162	52227	216	52464	219
51417	156	51676	162	52228	216	52465	219
51418	156	51677	162	52242	216	52466	219
51419	156	51678	162	52243	216	52468	219
51421	156	51679	162	52244	216	52484	220
51422	156	51680	162	52245	216	52486	220
51424	156	51681	162	52246	216	52488	220
51425	156	51752	163	52247	216	52489	220
51427	156	51753	163	52248	216	52493	220
51428	156	51754	163	52282	216	52495	220
51429	156	51755	163	52283	216	52498	220
51437	156	51756	163	52284	216	52500	220
51438	156	51757	163	52285	216	52524	221
51440	156	51758	163	52286	216	52526	221
51441	156	51761	163	52287	216	52529	221
51443	156	51762	163	52288	216	52532	221
51453	157	51763	163	52312	216	52544	221
51454	157	51772	160	52313	216	52546	221
51455	157	51773	160	52314	216	52549	221
51458	157	51774	160	52315	216	52552	221
51461	157	51775	160	52316	217	52562	221
51464	157	51776	160	52317	217	52564	221
51466	157	51777	160	52318	217	52566	221

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
52567	221	60113	180	60878	181	61252	183
52568	221	60231	195	60905	181	61253	183
52570	221	60232	195	60906	181	61254	183
52571	221	60233	195	60907	181	61256	183
52572	221	60234	195	60908	181	61257	183
52573	221	60235	195	60935	181	61259	183
52611	222	60236	195	60936	181	61260	183
52612	222	60237	195	60937	181	61261	183
52613	222	60238	195	60938	181	61280	183
52615	222	60239	195	60955	181	61281	183
52616	222	60240	195	60956	181	61282	183
52617	222	60241	195	60957	181	61283	183
52618	222	60242	195	60958	181	61284	183
52619	222	60301	181	61000	182	61285	183
52620	222	60302	181	61002	182	61286	183
52653	222	60303	181	61003	182	61287	183
52656	222	60304	181	61004	182	61288	183
52661	222	60305	181	61005	182	61289	183
52664	222	60306	181	61006	182	61290	183
52665	222	60307	181	61007	182	61292	183
52667	222	60308	181	61008	182	61293	183
52752	223	60310	181	61010	182	61294	183
52753	223	60311	181	61011	182	61295	183
52754	223	60312	181	61012	182	61296	183
52755	223	60313	181	61013	182	61297	183
52756	223	60601	180	61104	183	61352	184
52757	223	60602	180	61110	33	61354	184
52758	223	60603	180	61112	33	61355	184
56319	242	60604	180	61120	34	61357	184
56321	242	60605	180	61121	34	61359	184
56322	242	60606	180	61191	128	61360	184
56323	242	60607	180	61192	128	61362	184
56324	242	60608	180	61193	128	61366	184
56325	242	60610	180	61194	128	61370	184
56326	242	60611	180	61195	128	61395	184
56327	242	60612	180	61196	128	61404	184
56328	242	60613	180	61197	128	61406	184
56329	242	60701	180	61212	183	61409	184
60082	181	60702	180	61213	183	61504	185
60083	181	60703	180	61214	183	61505	185
60084	181	60704	181	61215	183	61506	185
60085	181	60705	181	61217	183	61701	186
60086	181	60706	181	61218	183	61702	186
60087	181	60707	181	61219	183	61703	186
60088	181	60708	181	61220	183	61704	186
60101	180	60710	181	61225	183	61705	186
60102	180	60711	181	61226	183	61707	186
60103	180	60712	181	61227	183	61708	186
60104	180	60713	181	61228	183	61709	186
60105	180	60801	182	61229	183	61710	186
60106	180	60802	182	61235	183	61711	186
60107	180	60803	182	61236	183	61714	186
60108	180	60804	182	61240	183	61715	186
60110	180	60875	181	61242	183	61716	186
60111	180	60876	181	61243	183	61717	186
60112	180	60877	181	61244	183	61718	186



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
61719	186	62113	179	63561	188	65382	193
61721	186	62301	179	63562	188	65384	193
61730	186	62302	179	63564	188	65385	193
61732	186	62303	179	63565	188	65386	193
61733	186	62305	179	63706	194	65387	193
61734	186	62306	179	63707	194	65388	193
61745	186	62307	179	63708	194	65392	193
61801	187	62308	179	63709	194	65481	192
61802	187	62309	179	63710	194	65482	192
61803	187	62312	179	63711	194	65483	192
61804	187	62313	179	63712	194	65484	192
61805	187	62316	179	63713	194	65485	192
61806	187	62317	179	63789	357	65486	192
61809	187	62318	179	63853	189	65487	192
61811	187	62322	179	63854	189	65488	192
61814	187	62323	179	63855	189	65490	192
61818	187	62324	179	63856	189	65491	192
61819	187	62325	179	63857	189	65492	192
61820	187	62326	179	63860	188	65531	192
61821	187	62327	179	63861	188	65532	192
61823	187	62328	179	63862	189	65533	192
61824	187	62329	179	63863	189	65534	192
61825	187	62330	179	63864	189	65535	192
61845	187	62331	179	63865	189	65536	192
61846	187	62332	179	63866	189	65537	192
61932	187	62333	179	63873	188	65538	192
61933	187	62334	179	63884	188	65540	192
61935	187	62336	179	63885	188	65541	192
61936	187	62337	179	63886	188	65542	192
62001	178	62338	179	63887	188	65543	192
62002	178	62339	179	63888	188	65544	192
62003	178	62340	179	63889	188	67002	242
62004	178	62341	179	63892	188	67004	242
62005	178	63108	145	63893	188	67005	242
62006	178	63109	145	63894	188	67006	242
62007	178	63113	143	63895	188	67007	242
62008	178	63115	143	65040	193	67008	242
62010	178	63117	143	65044	193	67009	242
62011	178	63118	143	65045	193	67010	242
62012	178	63126	144	65046	193	67011	242
62013	178	63127	144	65050	193	67102	243
62020	185	63128	144	65051	193	67104	243
62022	185	63452	197	65052	193	67105	243
62024	185	63453	197	65053	193	67106	243
62050	178	63455	197	65054	193	67107	243
62055	178	63457	197	65081	193	67108	243
62102	178	63458	197	65082	193	67109	243
62103	178	63459	197	65083	193	67110	243
62104	179	63460	197	65084	193	67111	243
62105	179	63462	197	65085	193	67206	247
62106	179	63463	197	65086	193	67209	247
62107	179	63464	197	65087	193	67211	247
62108	179	63473	198	65088	193	67212	247
62110	179	63558	188	65090	193	67214	247
62111	179	63559	188	65091	193	67215	247
62112	179	63560	188	65182	193	67218	247

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
67219	247	67361	247	68010	246	68729	245
67220	247	67366	247	68011	246	68730	245
67225	247	67369	247	68102	244	68731	245
67226	247	67373	247	68104	244	68732	245
67227	247	67402	246	68105	244	68733	245
67228	247	67404	246	68106	244	68734	245
67229	247	67405	246	68107	244	68735	245
67230	247	67406	246	68108	244	68736	244
67231	247	67407	246	68109	244	68738	244
67232	250	67408	246	68110	244	68739	244
67233	247	67503	249	68111	244	68740	244
67234	250	67506	249	68302	245	68741	244
67235	250	67507	249	68304	245	68742	244
67236	250	67508	249	68305	245	68743	244
67237	250	67509	249	68306	245	68744	244
67238	250	67510	249	68307	245	68745	244
67239	247	67511	249	68308	245	68746	245
67243	250	67515	249	68309	245	68748	245
67244	247	67516	249	68310	245	68749	245
67245	247	67517	249	68311	245	68750	245
67246	247	67518	249	68682	250	68751	245
67247	247	67519	249	68684	250	68752	245
67248	247	67520	249	68685	250	68753	245
67250	247	67521	249	68686	250	68754	245
67251	247	67602	244	68687	250	68755	245
67252	247	67604	244	68688	250	68756	251
67253	247	67605	244	68689	250	68757	251
67260	247	67606	244	68690	250	68758	251
67261	247	67607	244	68691	250	68759	251
67269	247	67608	244	68692	251	68760	251
67270	247	67609	244	68694	251	68761	251
67305	243	67610	244	68695	251	68762	251
67307	243	67611	244	68696	251	68763	251
67309	243	67702	245	68697	251	68791	252
67312	243	67704	245	68698	251	68793	252
67313	243	67705	245	68699	251	68794	252
67317	243	67706	245	68700	251	68795	252
67318	243	67707	245	68701	251	68796	252
67323	243	67708	245	68703	248	68797	252
67324	243	67709	245	68707	248	68798	252
67325	243	67710	245	68708	248	68799	252
67327	243	67711	245	68709	248	68804	244
67330	243	67802	248	68710	248	68806	244
67337	243	67805	248	68711	248	68807	244
67338	243	67806	249	68715	248	68808	244
67344	247	67809	249	68716	244	68809	244
67346	243	67811	249	68718	244	68810	244
67347	247	67814	249	68719	244	68811	244
67348	247	67818	249	68720	244	68812	244
67349	247	68002	246	68721	244	68813	244
67350	247	68004	246	68722	244	68814	245
67352	247	68005	246	68723	244	68816	245
67353	247	68006	246	68724	244	68817	245
67356	247	68007	246	68725	244	68818	245
67357	247	68008	246	68726	245	68819	245
67360	247	68009	246	68728	245	68820	245



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
68821	245	81221	70	81713	72	82310	66
68822	245	81222	70	81714	72	82311	66
68823	245	81223	70	81715	72	82312	66
68833	248	81224	70	81716	72	82313	66
68837	248	81225	70	81717	72	82314	66
68838	248	81226	70	81718	72	82315	66
68839	248	81229	70	81719	72	82316	66
68840	248	81230	70	81720	72	82317	66
68841	248	81231	70	81721	72	82318	66
80102	67	81232	70	81722	72	82319	66
80103	67	81233	70	81724	72	82320	66
80104	67	81236	70	81726	72	82321	66
80105	67	81237	70	81802	72	82322	66
80302	68	81238	70	81803	72	82323	66
80303	68	81239	70	81804	72	82324	67
80304	68	81240	70	81805	72	82331	67
80305	68	81241	70	81806	72	82338	67
80602	67	81244	70	81807	72	82339	67
80603	67	81245	70	81809	72	82345	67
80604	67	81246	70	81811	73	82346	67
80605	67	81247	70	81814	73	82348	67
80702	68	81248	70	81818	73	82606	67
80703	68	81249	70	81819	72	82607	67
80704	68	81250	70	81820	73	82608	67
80705	68	81304	71	81821	73	82609	67
81002	69	81305	71	81822	73	82610	67
81003	69	81306	71	81823	72	82611	67
81004	69	81307	71	81824	72	82706	68
81005	69	81308	71	81825	73	82707	68
81006	69	81309	71	81826	73	82708	68
81007	69	81310	71	82002	65	82709	68
81008	69	81311	71	82003	65	82710	68
81009	69	81312	71	82004	65	82711	68
81010	69	81313	71	82005	65	83212	80
81011	69	81316	71	82006	65	83213	80
81106	67	81317	71	82007	65	83214	80
81107	67	81320	71	82008	65	83215	80
81108	67	81321	71	82009	65	83216	80
81109	67	81324	71	82010	65	83217	80
81110	67	81326	71	82011	65	83218	80
81111	67	81331	71	82102	66	83306	68
81204	70	81334	71	82103	66	83307	68
81206	70	81336	71	82104	66	83308	68
81207	70	81339	71	82105	66	83309	68
81209	70	81454	71	82106	66	83310	68
81210	70	81455	71	82107	66	83311	68
81211	70	81458	71	82108	66	83403	81
81212	70	81461	71	82109	66	83405	81
81213	70	81703	72	82110	66	83407	81
81214	70	81704	72	82111	66	83423	81
81215	70	81705	72	82303	66	83425	81
81216	70	81707	72	82305	66	83427	81
81217	70	81708	72	82306	66	83712	78
81218	70	81709	72	82307	66	83713	78
81219	70	81710	72	82308	66	83714	78
81220	70	81711	72	82309	66	83715	78

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
83716	78	85337	74	90358	429	90927	430
83717	78	85338	74	90363	428	90928	430
83718	78	85339	74	90365	428	90929	430
83719	78	85340	74	90371	428	90930	430
83720	78	85350	76	90372	428	90931	430
83721	78	85351	76	90373	428	90932	30
83803	73	85352	76	90374	428	90933	30
83804	73	85353	76	90375	428	90934	30
83805	73	85354	76	90376	429	90935	30
83806	73	85355	76	90391	429	90936	30
83807	73	85356	76	90394	429	90980	43
83833	73	85358	76	90396	429	90981	43
83834	73	85359	76	90401	108	90982	43
83835	73	85360	75	90402	108	90983	43
83836	73	85362	75	90403	108	90984	43
83837	73	85365	75	90404	108	90985	43
83838	73	85367	75	90405	108	90986	43
83839	73	85368	75	90406	108	90987	43
85032	77	85369	75	90407	108	90988	43
85033	77	85370	75	90408	108	90989	43
85034	77	90000	431	90409	108	91031	112
85035	77	90072	111	90410	108	91032	112
85036	77	90074	111	90411	108	91033	112
85037	77	90075	111	90412	167	91034	112
85038	77	90076	111	90465	230	91035	112
85042	77	90077	111	90466	230	91036	112
85044	77	90078	111	90467	230	91037	112
85045	77	90080	109	90468	230	91038	112
85046	77	90081	109	90523	415	91039	112
85047	77	90082	109	90563	429	91041	111
85072	77	90083	109	90775	404	91042	111
85075	78	90084	109	90776	404	91043	111
85132	78	90085	109	90778	404	91044	111
85134	78	90086	109	90779	404	91045	111
85300	76	90092	110	90780	404	91046	111
85301	76	90094	110	90781	404	91047	111
85302	76	90095	110	90783	404	91048	111
85303	76	90096	110	90797	426	91049	111
85304	76	90097	110	90798	426	91064	171
85305	76	90098	110	90799	426	91065	171
85306	76	90253	149	90881	108	91066	171
85307	76	90254	149	90882	108	91067	171
85308	76	90255	149	90883	108	91068	171
85309	76	90282	106	90884	108	91069	171
85320	74	90341	430	90885	108	91070	171
85321	74	90342	430	90886	108	91071	171
85322	74	90343	430	90887	108	91072	171
85323	74	90344	430	90888	108	91073	171
85324	74	90345	430	90891	108	91087	427
85325	74	90346	430	90892	108	91088	427
85326	74	90347	430	90893	108	91092	428
85330	74	90348	430	90922	430	91096	64
85332	74	90349	430	90923	430	91097	64
85333	74	90350	430	90924	430	91098	64
85334	74	90351	429	90925	430	91099	64
85335	74	90357	428	90926	430	91100	64



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
91103	213	92142	409	94964	401	601.130.00.2	338
91104	213	92143	409	94965	401	601.131.00.2	339
91105	213	92144	409	94966	401	601.132.00.1	339
91106	213	92145	409	94967	401	601.134.00.1	340
91152	109	92146	409	94968	401	601.135.00.1	339
91153	109	92147	409	241.491.00.1	448	601.136.00.1	339
91154	109	92148	409	241.492.00.1	448	601.200.00.1	340
91155	109	92149	409	241.493.00.1	448	601.230.00.1	341
91156	109	92150	409	241.494.00.1	448	601.230.00.2	341
91157	109	92152	409	241.495.00.1	448	601.231.00.2	341
91158	109	92153	409	241.496.00.1	448	601.232.00.1	342
91159	109	92154	409	241.497.00.1	448	601.235.00.1	342
91160	109	92155	409	241.576.00.1	390	601.252.00.5	350
91161	109	92156	409	241.577.00.1	390	601.256.00.5	350
91164	112	92157	409	242.319.00.1	328	601.273.00.5	359
91165	112	92158	409	242.323.00.1	328	601.276.00.5	366
91166	112	92159	409	242.324.00.1	328	601.289.00.5	358
91167	112	94862	390	242.325.00.1	328	601.293.00.5	358
91168	112	94863	390	242.326.00.1	328	601.296.00.5	358
91169	112	94864	390	242.327.00.1	328	601.360.00.5	346
91170	112	94865	390	242.329.00.1	328	601.485.00.1	447
91171	112	94866	390	242.330.00.1	328	601.508.00.5	27
91172	112	94882	395	242.331.00.1	328	601.535.00.5	348
91173	112	94883	395	242.332.00.1	328	601.536.00.5	348
92080	252	94884	395	242.333.00.1	328	601.555.00.5	349
92082	252	94885	395	242.614.P5.1	414	601.556.00.5	349
92083	252	94886	395	242.807.00.1	399	601.571.00.5	353
92084	252	94887	395	242.976.00.1	328	601.575.00.5	343
92085	252	94888	395	360.850.00.1	323	601.581.00.5	355
92086	252	94902	392	361.850.00.1	323	601.582.00.5	355
92087	252	94903	392	362.834.26.1	104	601.583.00.5	355
92088	252	94904	392	362.848.26.1	105	601.584.00.5	355
92089	252	94905	392	362.851.26.1	105	601.590.00.5	354
92100	402	94912	408	362.856.26.1	104	601.595.00.5	354
92101	402	94913	408	362.857.26.1	105	601.710.00.1	322
92102	402	94914	408	364.850.00.1	323	601.731.00.1	106
92103	402	94922	400	365.850.00.1	323	601.732.00.1	107
92104	402	94923	400	461.082.00.1	391	601.733.00.1	106
92105	402	94924	400	465.034.00.2	297	601.736.00.1	227
92106	402	94925	400	600.021.00.1	110	601.737.00.1	228
92107	402	94926	400	600.022.00.1	110	601.738.00.1	227
92108	402	94927	400	600.023.00.1	110	601.741.00.1	107
92109	402	94928	400	600.024.00.1	110	601.742.00.1	107
92110	402	94935	401	600.025.00.1	110	601.744.00.1	230
92112	402	94936	401	600.026.00.1	110	601.761.00.1	321
92120	403	94937	401	600.027.00.1	110	601.763.00.1	321
92122	403	94938	401	600.028.00.1	110	601.781.00.5	363
92123	403	94952	399	600.029.00.1	110	601.785.00.5	362
92124	403	94953	399	600.030.00.1	110	601.800.00.1	318
92125	403	94954	399	600.031.00.1	110	601.801.00.1	103
92126	403	94955	399	600.032.00.1	110	601.802.00.1	224
92127	403	94956	399	600.033.00.1	110	601.805.00.1	224
92128	403	94957	399	600.034.00.1	110	601.811.00.1	376
92129	403	94958	399	601.020.00.2	398	601.812.00.1	320
92132	403	94962	401	601.100.00.1	338	601.813.00.1	103
92140	409	94963	401	601.130.00.1	338	601.815.00.1	103

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
601.850.26.1	104	602.535.00.5	348	603.575.00.5	343	605.558.00.5	349
601.851.26.1	104	602.536.00.5	348	603.582.00.5	355	605.559.00.5	349
601.852.26.1	104	602.555.00.5	349	603.583.00.5	355	605.571.00.5	353
601.853.26.1	104	602.556.00.5	349	603.584.00.5	355	605.575.00.5	343
601.854.26.1	104	602.571.00.5	353	603.585.00.5	355	605.581.00.5	355
601.855.26.1	104	602.575.00.5	343	603.586.00.5	355	605.582.00.5	355
601.856.26.1	323	602.581.00.5	355	603.587.00.5	355	605.585.00.5	355
601.857.26.1	104	602.582.00.5	355	603.590.00.5	354	605.589.00.5	355
601.858.26.1	165	602.583.00.5	355	603.595.00.5	354	605.590.00.5	354
601.859.26.1	104	602.584.00.5	355	603.702.00.1	322	605.591.00.5	354
601.860.26.1	104	602.585.00.5	355	603.710.00.1	322	605.595.00.5	354
601.861.26.1	104	602.586.00.5	355	603.800.00.1	318	605.596.00.5	354
601.910.00.5	384	602.590.00.5	354	603.811.00.1	376	605.702.00.1	323
602.020.00.2	398	602.591.00.5	354	603.910.00.5	384	605.910.00.5	384
602.023.00.2	398	602.595.00.5	354	604.020.00.2	398	606.020.00.2	398
602.032.00.1	394	602.710.00.1	322	604.032.00.1	394	606.032.00.1	394
602.100.00.1	338	602.761.00.1	321	604.100.00.1	338	606.100.00.1	338
602.130.00.1	338	602.762.26.1	321	604.254.00.5	350	606.255.00.5	350
602.130.00.2	338	602.763.00.1	321	604.258.00.5	350	606.256.00.5	350
602.131.00.2	339	602.780.00.5	363	604.360.00.5	346	606.360.00.5	346
602.132.00.1	339	602.781.00.5	363	604.362.00.5	346	606.361.00.5	346
602.134.00.1	340	602.782.00.5	363	604.363.00.5	346	606.362.00.5	346
602.135.00.1	339	602.783.00.5	364	604.485.00.1	447	606.363.00.5	346
602.136.00.1	339	602.784.00.5	364	604.508.00.5	27	606.485.00.1	447
602.200.00.1	340	602.785.00.5	362	604.537.00.5	348	606.508.00.5	27
602.230.00.1	341	602.800.00.1	318	604.538.00.5	348	606.537.00.5	348
602.231.00.2	341	602.811.00.1	376	604.557.00.5	349	606.540.00.5	348
602.232.00.1	342	602.910.00.5	384	604.558.00.5	349	606.559.00.5	349
602.235.00.1	342	603.020.00.2	398	604.571.00.5	353	606.560.00.5	349
602.252.00.5	350	603.023.00.2	398	604.575.00.5	343	606.571.00.5	353
602.253.00.5	350	603.032.00.1	394	604.581.00.5	355	606.575.00.5	343
602.256.00.5	350	603.100.00.1	338	604.583.00.5	355	606.580.00.5	355
602.257.00.5	350	603.110.00.1	338	604.584.00.5	355	606.581.00.5	355
602.260.00.1	299	603.132.00.1	339	604.585.00.5	355	606.582.00.5	355
602.265.00.1	299	603.134.00.1	340	604.586.00.5	355	606.583.00.5	355
602.273.00.5	359	603.135.00.1	339	604.590.00.5	354	606.584.00.5	355
602.274.00.5	359	603.136.00.1	339	604.591.00.5	354	606.585.00.5	355
602.275.00.5	359	603.200.00.1	340	604.595.00.5	354	606.590.00.5	354
602.276.00.5	366	603.230.00.1	341	604.596.00.5	354	606.591.00.5	354
602.283.00.1	44	603.232.00.1	342	604.702.00.1	323	606.595.00.5	354
602.285.00.1	45	603.235.00.1	342	604.910.00.5	384	606.596.00.5	354
602.287.00.2	45	603.253.00.5	350	605.020.00.2	398	606.702.00.1	323
602.289.00.5	358	603.254.00.5	350	605.032.00.1	394	606.910.00.5	384
602.293.00.5	358	603.257.00.5	350	605.100.00.1	338	607.100.00.1	338
602.294.00.5	358	603.258.00.5	350	605.255.00.5	350	607.255.00.5	350
602.295.00.1	44	603.294.00.5	358	605.259.00.5	350	607.256.00.5	350
602.296.00.5	358	603.360.00.5	346	605.360.00.5	346	607.360.00.5	346
602.360.00.5	346	603.362.00.5	346	605.362.00.5	346	607.363.00.5	346
602.422.00.1	308	603.485.00.1	447	605.363.00.5	346	607.366.00.5	346
602.423.00.1	308	603.508.00.5	27	605.364.00.5	346	607.485.00.1	447
602.480.00.1	308	603.535.00.5	348	605.485.00.1	447	607.508.00.5	27
602.482.00.1	308	603.536.00.5	348	605.508.00.5	27	607.539.00.5	348
602.485.00.1	447	603.537.00.5	348	605.537.00.5	348	607.541.00.5	348
602.507.00.5	27	603.556.00.5	349	605.538.00.5	348	607.560.00.5	349
602.508.00.5	27	603.557.00.5	349	605.539.00.5	348	607.561.00.5	349
602.509.00.5	27	603.571.00.5	353	605.557.00.5	349	607.571.00.5	353



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
607.581.00.5	355	612.512.24.5	356	619.152.00.1	269	619.670.00.1	301
607.583.00.5	355	612.566.00.5	356	619.160.00.1	267	619.671.00.1	301
607.584.00.5	355	613.011.21.2	406	619.161.00.1	267	619.680.00.1	302
607.587.00.5	355	613.021.21.2	407	619.162.00.1	267	619.681.00.1	302
607.590.00.5	354	613.061.00.2	397	619.170.00.1	269	619.690.00.1	302
607.591.00.5	354	613.312.00.5	368	619.171.00.1	269	619.700.00.1	278
607.595.00.5	354	613.313.00.5	368	619.172.00.1	269	619.701.00.1	278
607.702.00.1	323	613.314.00.5	368	619.180.00.1	269	619.702.00.1	278
607.910.00.5	384	613.513.24.5	356	619.181.00.1	269	619.703.00.1	278
608.100.00.1	338	613.567.00.5	356	619.182.00.1	269	619.704.00.1	278
608.363.00.5	346	614.061.00.2	397	619.220.00.1	266	619.705.00.1	278
608.520.00.5	356	615.061.00.2	397	619.221.00.1	266	619.706.00.1	278
608.541.00.5	348	616.061.00.2	397	619.260.22.1	317	619.730.00.1	322
608.561.00.5	349	619.010.00.1	264	619.261.22.1	317	619.731.00.1	322
608.702.00.1	323	619.011.00.1	264	619.267.22.1	316	619.732.00.1	322
608.910.00.5	384	619.012.00.1	264	619.300.00.1	309	619.733.00.1	322
610.059.00.1	399	619.013.00.1	264	619.302.00.1	309	619.734.00.1	322
610.060.00.1	400	619.014.00.1	264	619.311.00.1	309	619.735.00.1	322
611.011.21.2	406	619.015.00.1	264	619.312.00.1	309	619.736.00.1	322
611.021.21.2	407	619.016.00.1	264	619.321.00.1	309	619.737.00.1	322
611.061.00.2	397	619.020.00.1	264	619.322.00.1	309	619.738.00.1	321
611.250.22.7	370	619.021.00.1	264	619.331.00.1	309	619.739.00.1	321
611.251.22.7	370	619.022.00.1	264	619.371.00.1	310	619.830.00.1	393
611.260.00.1	369	619.023.00.1	264	619.380.22.1	311	619.831.00.1	393
611.263.00.1	369	619.024.00.1	264	619.391.22.1	311	619.832.00.1	393
611.277.00.6	365	619.025.00.1	264	619.400.22.1	312	619.833.00.1	393
611.289.00.5	358	619.026.00.1	264	619.401.22.1	312	619.834.00.1	393
611.319.00.5	368	619.027.00.1	264	619.410.22.1	312	619.835.00.1	393
611.360.22.7	370	619.050.00.1	265	619.411.22.1	312	619.850.00.1	396
611.361.22.7	371	619.051.00.1	265	619.420.22.1	313	619.851.00.1	396
611.363.22.7	371	619.052.00.1	265	619.421.22.1	313	619.852.00.1	396
611.364.22.7	371	619.054.00.1	265	619.440.22.1	314	619.853.00.1	396
611.512.24.5	356	619.060.00.1	265	619.440.22.2	314	619.854.00.1	396
611.565.00.5	356	619.061.00.1	265	619.441.22.1	314	619.855.00.1	396
611.601.22.3	147	619.070.00.1	265	619.441.22.2	314	619.860.21.5	406
611.603.22.3	148	619.100.00.1	266	619.450.22.1	314	619.861.21.5	406
611.605.BM.1	164	619.101.00.1	266	619.460.22.1	314	619.862.21.5	406
611.610.BM.1	164	619.102.00.1	266	619.471.22.1	317	619.870.00.1	405
612.011.21.2	406	619.103.00.1	266	619.472.22.1	317	620.010.00.1	270
612.012.21.5	407	619.110.00.1	267	619.481.22.1	317	620.011.00.1	270
612.021.21.2	407	619.111.00.1	267	619.482.22.1	317	620.012.00.1	270
612.061.00.2	397	619.112.00.1	267	619.490.22.1	316	620.013.00.1	270
612.063.00.2	397	619.120.00.1	267	619.491.22.1	316	620.014.00.1	270
612.250.22.7	370	619.121.00.1	267	619.492.22.1	316	620.015.00.1	270
612.251.22.7	370	619.122.00.1	267	619.616.00.1	289	620.016.00.1	270
612.256.00.5	349	619.123.00.1	267	619.617.00.1	290	620.017.00.1	270
612.260.00.1	369	619.130.00.1	268	619.620.00.1	298	620.020.00.1	270
612.265.00.1	368	619.131.00.1	268	619.621.00.1	298	620.021.00.1	270
612.277.00.6	365	619.133.00.1	268	619.630.00.1	300	620.022.00.1	270
612.289.00.5	358	619.135.00.2	268	619.631.00.1	300	620.023.00.1	270
612.293.00.5	358	619.140.00.1	267	619.639.00.1	300	620.024.00.1	270
612.315.00.5	368	619.141.00.1	267	619.640.00.1	300	620.025.00.1	270
612.316.00.5	368	619.142.00.1	267	619.641.00.1	300	620.031.00.1	271
612.319.00.5	368	619.143.00.1	267	619.651.00.1	300	620.032.00.1	271
612.361.22.7	371	619.150.00.1	269	619.660.00.1	301	620.033.00.1	271
612.362.22.7	370	619.151.00.1	269	619.661.00.1	301	620.034.00.1	271

Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
620.035.00.1	271	620.122.00.1	273	620.301.00.1	277	620.491.00.1	281
620.036.00.1	271	620.123.00.1	273	620.302.00.1	277	620.502.00.1	279
620.037.00.1	271	620.124.00.1	273	620.303.00.1	277	620.503.00.1	279
620.042.00.1	271	620.125.00.1	273	620.304.00.1	277	620.504.00.1	279
620.043.00.1	271	620.126.00.1	273	620.305.00.1	277	620.505.00.1	279
620.044.00.1	271	620.127.00.1	273	620.306.00.1	277	620.506.00.1	279
620.045.00.1	271	620.131.00.1	273	620.307.00.1	277	620.510.00.1	279
620.046.00.1	271	620.132.00.1	273	620.308.00.1	277	620.511.00.1	279
620.047.00.1	271	620.133.00.1	273	620.309.00.1	277	620.512.00.1	279
620.054.00.1	271	620.135.00.1	273	620.310.00.1	277	620.520.00.1	279
620.057.00.1	271	620.136.00.1	273	620.311.00.1	277	620.521.00.1	279
620.062.00.1	272	620.137.00.1	273	620.312.00.1	277	620.522.00.1	279
620.063.00.1	272	620.142.00.1	273	620.313.00.1	277	620.523.00.1	279
620.064.00.1	272	620.143.00.1	273	620.314.00.1	277	620.524.00.1	279
620.065.00.1	272	620.147.00.1	273	620.315.00.1	277	620.525.00.1	279
620.066.00.1	272	620.150.00.1	274	620.316.00.1	277	620.526.00.1	279
620.067.00.1	272	620.151.00.1	274	620.320.00.1	277	620.527.00.1	279
620.070.00.1	272	620.152.00.1	274	620.321.00.1	277	620.528.00.1	279
620.071.00.1	272	620.153.00.1	274	620.322.00.1	277	620.532.00.1	280
620.072.00.1	272	620.154.00.1	274	620.324.00.1	277	620.533.00.1	280
620.073.00.1	272	620.155.00.1	274	620.329.00.1	26	620.534.00.1	280
620.074.00.1	272	620.156.00.1	274	620.330.00.1	309	620.535.00.1	280
620.075.00.1	272	620.157.00.1	274	620.331.00.1	309	620.536.00.1	280
620.076.00.1	272	620.162.00.1	274	620.332.00.1	26	620.540.00.1	280
620.077.00.1	272	620.163.00.1	274	620.333.00.1	26	620.541.00.1	280
620.080.00.1	273	620.164.00.1	274	620.334.00.1	26	620.542.00.1	280
620.081.00.1	273	620.165.00.1	274	620.335.00.1	26	620.550.00.1	280
620.082.00.1	273	620.166.00.1	274	620.336.00.1	26	620.551.00.1	280
620.083.00.1	273	620.173.00.1	274	620.337.00.1	26	620.560.00.1	283
620.084.00.1	273	620.174.00.1	274	620.338.00.1	26	620.561.00.1	283
620.085.00.1	273	620.175.00.1	274	620.339.00.1	26	620.562.00.1	283
620.086.00.1	273	620.176.00.1	274	620.347.00.1	26	620.570.00.1	284
620.087.00.1	273	620.177.00.1	274	620.380.00.1	281	620.571.00.1	284
620.090.00.1	275	620.184.00.1	274	620.381.00.1	281	620.572.00.1	284
620.091.00.1	275	620.185.00.1	274	620.382.00.1	281	620.573.00.1	284
620.092.00.1	275	620.230.00.1	26	620.391.00.1	281	620.574.00.1	284
620.093.00.1	275	620.231.00.1	26	620.392.00.1	281	620.575.00.1	284
620.094.00.1	275	620.232.00.1	26	620.400.00.1	278	620.576.00.1	284
620.095.00.1	275	620.233.00.1	26	620.401.00.1	278	620.580.00.1	284
620.096.00.1	275	620.234.00.1	26	620.402.00.1	278	620.581.00.1	284
620.097.00.1	275	620.235.00.1	26	620.403.00.1	278	620.582.00.1	284
620.101.00.1	273	620.236.00.1	26	620.404.00.1	278	620.583.00.1	284
620.102.00.1	273	620.240.00.1	26	620.405.00.1	278	620.584.00.1	284
620.103.00.1	273	620.241.00.1	26	620.406.00.1	278	620.585.00.1	284
620.104.00.1	273	620.242.00.1	26	620.407.00.1	278	620.586.00.1	284
620.105.00.1	273	620.250.00.1	25	620.410.00.1	278	620.591.00.1	284
620.106.00.1	273	620.251.00.1	25	620.411.00.1	278	620.593.00.1	284
620.107.00.1	273	620.252.00.1	25	620.412.00.1	278	620.594.00.1	284
620.111.00.1	273	620.253.00.1	25	620.413.00.1	278	620.595.00.1	284
620.112.00.1	273	620.254.00.1	25	620.414.00.1	278	620.596.00.1	284
620.113.00.1	273	620.255.00.1	25	620.415.00.1	278	620.600.00.1	285
620.114.00.1	273	620.256.00.1	25	620.416.00.1	278	620.601.00.1	285
620.115.00.1	273	620.257.00.1	25	620.420.00.1	278	620.602.00.1	285
620.116.00.1	273	620.290.00.1	280	620.421.00.1	278	620.603.00.1	285
620.117.00.1	273	620.291.00.1	280	620.424.00.1	278	620.604.00.1	285
620.121.00.1	273	620.300.00.1	277	620.490.00.1	281	620.605.00.1	285



Art. no.	Page	Art. no.	Page	Art. no.	Page	Art. no.	Page
620.606.00.1	285	620.721.00.1	288	622.311.00.5	345	626.321.00.5	345
620.613.00.1	285	620.722.00.1	288	622.312.00.5	345	626.505.00.5	342
620.614.00.1	285	620.730.00.1	289	622.313.00.5	345	626.537.00.5	348
620.615.00.1	285	620.731.00.1	289	622.314.00.5	345	626.652.00.5	343
620.620.00.1	286	620.732.00.1	289	622.451.00.5	351	626.653.00.5	343
620.621.00.1	286	620.740.00.1	290	622.452.00.5	351	627.245.00.5	344
620.622.00.1	286	620.741.00.1	290	622.453.00.5	351	627.271.00.5	344
620.623.00.1	286	620.742.00.1	290	622.454.00.5	352	627.310.00.5	344
620.624.00.1	286	620.750.00.1	294	622.455.00.5	351	627.316.00.5	345
620.625.00.1	286	620.751.00.1	294	622.505.00.5	342	627.320.00.5	345
620.626.00.1	286	620.760.00.1	294	622.535.00.5	348	627.321.00.5	345
620.630.00.1	286	620.761.00.1	294	622.650.00.5	343	627.322.00.5	345
620.631.00.1	286	620.770.00.1	294	623.000.00.5	357	627.505.00.5	342
620.632.00.1	286	620.771.00.1	294	623.245.00.5	344	627.539.00.5	348
620.633.00.1	286	620.780.00.1	282	623.271.00.5	344	627.653.00.5	343
620.634.00.1	286	620.781.00.1	282	623.310.00.5	344	627.654.00.5	343
620.635.00.1	286	620.790.00.1	304	623.311.00.5	345	628.245.00.5	344
620.636.00.1	286	620.791.00.1	304	623.315.00.5	345	628.271.00.5	344
620.640.00.1	286	620.800.00.1	294	623.316.00.5	345	628.310.00.5	344
620.641.00.1	286	620.801.00.1	294	623.317.00.5	345	628.316.00.5	345
620.642.00.1	286	620.802.00.1	294	623.318.00.5	345	628.320.00.5	345
620.643.00.1	286	620.803.00.1	305	623.451.00.5	351	628.321.00.5	345
620.644.00.1	286	620.804.00.1	305	623.452.00.5	351	628.322.00.5	345
620.645.00.1	286	620.810.00.1	294	623.505.00.5	342	628.323.00.5	345
620.646.00.1	286	620.811.00.1	294	623.536.00.5	348	628.505.00.5	342
620.650.00.1	286	620.812.00.1	305	623.650.00.5	343	628.541.00.5	348
620.651.00.1	286	620.813.00.1	305	623.651.00.5	343	628.653.00.5	343
620.652.00.1	286	620.821.00.1	294	624.245.00.5	344	628.654.00.5	343
620.653.00.1	286	620.822.00.1	306	624.271.00.5	344	628.655.00.5	343
620.654.00.1	286	620.823.00.1	306	624.310.00.5	344	632.005.00.1	32
620.655.00.1	286	620.830.00.1	295	624.311.00.5	345	632.006.00.1	32
620.656.00.1	286	620.831.00.1	295	624.314.00.5	345	632.007.00.1	32
620.661.00.1	286	620.832.00.1	295	624.316.00.5	345	632.008.00.1	32
620.662.00.1	286	620.841.00.1	295	624.317.00.5	345	632.856.00.1	47
620.663.00.1	286	620.842.00.1	295	624.319.00.5	345	641.513.00.1	373
620.665.00.1	286	620.851.00.1	295	624.505.00.5	342	641.514.00.1	374
620.671.00.1	286	620.852.00.1	295	624.537.00.5	348	641.515.00.1	373
620.672.00.1	286	620.881.00.1	296	624.651.00.5	343	641.516.22.1	374
620.673.00.1	286	620.890.00.1	304	624.652.00.5	343	641.534.22.2	367
620.675.00.1	286	620.891.00.1	304	625.245.00.5	344	642.534.22.2	367
620.680.00.1	287	620.921.00.1	296	625.271.00.5	344	650.681.00.3	291
620.681.00.1	287	620.951.00.1	295	625.310.00.5	344	650.683.00.3	292
620.683.00.1	287	620.981.00.1	295	625.317.00.5	345	650.687.00.3	291
620.684.00.1	287	620.990.00.1	303	625.319.00.5	345	650.688.00.3	291
620.685.00.1	287	620.991.00.1	303	625.321.00.5	345	650.689.00.3	292
620.686.00.1	287	621.000.00.5	357	625.505.00.5	342	650.791.00.3	293
620.688.00.1	287	621.271.00.5	344	625.538.00.5	348	650.792.00.3	293
620.689.00.1	287	621.310.00.5	344	625.651.00.5	343	650.921.00.2	434
620.690.00.1	287	621.451.00.5	351	625.652.00.5	343	651.681.00.3	291
620.691.00.1	287	621.452.00.5	351	625.653.00.5	343	651.791.00.3	293
620.693.00.1	287	621.453.00.5	351	626.245.00.5	344	652.682.00.3	291
620.694.00.1	287	621.454.00.5	352	626.271.00.5	344	652.685.00.3	292
620.700.00.1	288	621.505.00.5	342	626.310.00.5	344	653.420.00.1	307
620.701.00.1	288	622.000.00.5	357	626.317.00.5	345	653.428.00.1	306
620.710.00.1	288	622.271.00.5	344	626.319.00.5	345	653.429.00.1	306
620.720.00.1	288	622.310.00.5	344	626.320.00.5	345	653.478.00.1	307

Art. no.	Page	Art. no.	Page
655.078.00.1	433	690.253.00.1	442
655.079.00.1	433	690.254.00.1	442
655.081.00.1	436	690.300.00.1	435
655.082.00.1	436	690.301.00.1	435
655.083.00.1	436	690.412.00.3	436
655.084.00.1	433	690.467.00.2	443
690.019.00.1	414	690.474.00.1	440
690.102.00.1	435	690.475.00.1	440
690.103.00.1	435	690.476.00.1	440
690.111.00.1	434	690.485.00.4	440
690.112.00.1	434	690.486.00.4	440
690.115.00.1	434	690.491.00.1	448
690.121.00.1	422	690.493.00.1	431
690.122.00.1	422	690.589.00.1	416
690.123.00.1	422	690.598.P5.1	417
690.124.00.1	422	690.600.00.1	416
690.125.00.1	422	690.912.00.1	436
690.126.00.1	422	690.913.00.1	436
690.134.00.1	444	690.915.00.1	437
690.140.00.1	441	690.916.00.1	437
690.141.00.1	441	690.917.00.1	438
690.142.00.1	441	690.918.00.1	438
690.143.00.1	441	690.933.00.5	445
690.144.00.1	441	690.936.00.1	434
690.180.00.1	441	690.937.00.1	438
690.181.00.1	441	690.938.00.1	438
690.182.00.1	441	690.942.00.1	330
690.190.00.1	N/A	691.017.P5.1	414
690.191.00.1	N/A	691.030.00.1	432
690.192.00.1	N/A	691.129.00.1	449
690.193.00.1	N/A	691.137.00.1	423
690.195.00.1	N/A	691.170.00.1	444
690.211.00.1	445	691.171.00.1	444
690.212.00.1	445	691.181.00.1	424
690.214.00.1	446	691.182.00.1	424
690.215.00.1	446	691.183.00.1	424
690.221.00.1	423	691.185.00.3	424
690.222.00.1	423	691.186.00.1	426
690.223.00.1	423	691.187.00.1	426
690.224.00.1	423	691.188.00.1	425
690.225.00.1	423	691.189.00.1	425
690.226.00.1	423	691.203.00.1	424
690.230.00.1	422	691.218.P5.2	415
690.231.00.1	422	691.219.P5.2	416
690.232.00.1	422	691.229.P5.2	417
690.233.00.1	422	691.296.00.2	424
690.235.00.1	422	691.297.00.3	424
690.240.00.1	442		
690.241.00.1	442		
690.242.00.1	442		
690.243.00.1	442		
690.244.00.1	442		
690.245.00.1	442		
690.250.00.1	442		
690.251.00.1	442		
690.252.00.1	442		



Geberit Sales Ltd

Geberit House
Edgehill Drive
Warwick
CV34 6NH

T 01926 516 800

F 01926 400 101

In Eire +44 (0)1926 516 800

Literature 0800 007 5133

enquiries@geberit.co.uk

www.geberit.co.uk