

Technical Data



AquaClean 8000plus Care, floor standing with exposed cistern



Includes: floor standing WC with dirt-repellant ceramic surface, plastic casing, remote control, infra-red remote, fastening material and connection parts, waste fitting, isolation valve 1/2" BSP.

Features: warm water shower, dryer, air purification, Lady shower, seat height adjustable at installation, dual flush, remote flushing, adjustable shower and dryer arm settings, programmable user profiles.

AquaClean 8000plus Care, white Article no. 185.200.11.1

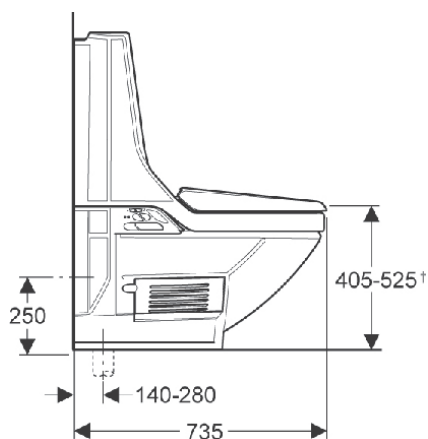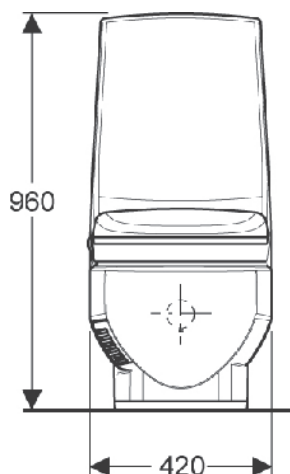


Technical data

Protection class	IP X4
Nominal voltage	230 V/ 50 Hz unswitched fuse spur. Fused at 5A.
Length of main lead	500mm, white
Power input	1000 W
Pressure range	1 - 10 bar (mains connection)
Water connection	3/8" BSP
Dryer temperature	max. 45 C adjustable
Water temperature	max. 39 C adjustable
Water flow	Adjustable from 1.4 to 5.5 litres/min
Water heater capacity	1.8 litres
Air volume through active carbon filter	10 m / h
Weight	32kg
Dual flush	6/3 litres

Height adjustable For ease of standing up and side transfer from wheelchair, the AquaClean Care can be installed to a seat height of up to 525mm in 20mm stages.

Remote controls The remote control is included with the product and is used to programme individual settings to suit each user's needs. The infra-red remote offers hands-free operation to ensure functions can be activated with even greater ease

Note: Electrical installtion should be carried out by authorised experts only and in accordance with the current edition of I.E.E Regulations.

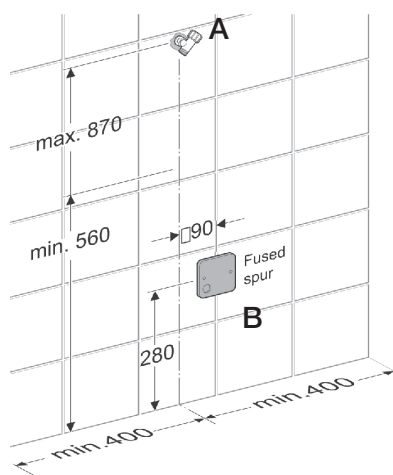

- A** Install isolation valve centered behind the cistern, or on the left/right.
- B** Nominal voltage 230 V/ 50 HZ. Note: Connect to an unswitched fused spur.
- C** Waste pipe connection is possible from the floor, the wall or from left/right.

