

GBP PRICES VALID FROM 1 APRIL 2026

# **GEBERIT DRAINAGE SYSTEMS PRODUCT GUIDE AND PRICE LIST**

**KNOW  
HOW  
INSTALLED**

<b>Geberit HDPE</b>	<b>7</b>
<b>Geberit Silent-db20</b>	<b>69</b>
<b>Geberit Silent-PP</b>	<b>99</b>
<b>Fire Protection, Sound Insulation and Moisture Protection</b>	<b>125</b>
<b>Air Admittance Valves for Drainage</b>	<b>131</b>
<b>Geberit Pluvia Roof Drainage Systems</b>	<b>135</b>
<b>Conventional Roof Drainage Systems</b>	<b>159</b>
<b>Floor Drainage Systems</b>	<b>165</b>
<b>Tools</b>	<b>173</b>
<b>Appendix</b>	<b>197</b>



## Swiss precision, spirit of innovation and art of engineering

Since the day it all began in 1874 in Switzerland, we have been defined by our experiences. Geberit has been among the pioneers of the industry and is still setting trends with comprehensive system solutions.

Those who use Geberit systems are playing safe. No uncertainties that can result when combining components from different manufacturers and no unnecessary material costs and installation workload. In addition, Geberit systems offer maximum reliability and economic viability, and cause a minimum of environmental impact.

### Geberit Drainage Systems

Drainage means more than just draining away water –at least as far as Geberit is concerned. Geberit invests a good deal of know-how in the development of innovative products to ensure that drainage technology keeps pace with reality on the building site as well as continuing to meet high standards in terms of sound insulation and fire protection.

#### Geberit Drainage at a glance

- Commercial soil & waste drainage with Geberit HDPE
- High resistance to temperatures and chemicals
- Geberit Silent-db20 system for high acoustic requirements
- Remove the ventilation stack on high rise buildings with the Geberit Sovent
- Siphonic roof drainage available with Geberit Pluvia




#### A little Know-how goes a long way

Geberit provide installer training at purpose built training academies in Warwick and Dublin – providing the Know-how for installers to feel confident in installing Geberit products.

At Geberit we have a dedicated technical support team on hand and ready to help. To contact us call 01926 516800 or email [technical@geberit.co.uk](mailto:technical@geberit.co.uk)

### Geberit at your fingertips

Also available to you is the Geberit ProApp where you can get access to product specifications, installation instructions and videos. You can also identify any Geberit product simply by scanning its barcode

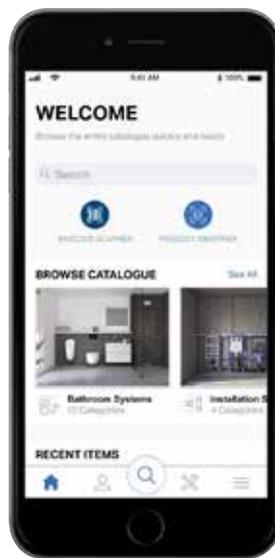

ProApp QR-Code for Apple App Store:



ProApp QR-Code for Google Play Store:



#### From beginning to end

With an in-depth range of products and systems, Geberit provides innovative solutions for water supply, use and drainage. Once installed, many Geberit products remain invisible to the end user. And they fulfil their function for many decades thanks to their high level of quality and reliability.

##### Supply:

- Geberit Mapress pressfitting systems
- Geberit Mepla multilayer pipe system
- Geberit FlowFit multilayer system

##### Sanitary:

- Geberit AquaClean shower toilets
- Geberit Duofix for wall-hung solutions
- Geberit concealed cisterns and flushing mechanisms
- Geberit solutions for wet-room floors
- Touchless solutions for taps and WC actuation





# Geberit HDPE

<b>Preliminary remarks</b> .....	<b>9</b>
<b>Pipes</b> .....	<b>10</b>
<b>Fittings</b> .....	<b>11</b>
Bends .....	11
Branch fittings .....	14
Reducers .....	22
Access pipes .....	24
Adaptors .....	25
Special fittings .....	25
<b>Connections</b> .....	<b>27</b>
Welding joints .....	27
Push-in connections .....	28
Adaptors to other product materials .....	30
Screwing joints .....	33
Flange connections .....	38
Flange bushings .....	40
<b>Waste Fittings</b> .....	<b>40</b>
Connection bends .....	40
Coupling sockets .....	44
Straight connectors .....	46
P-traps .....	46
Suction traps .....	47
<b>Accessories</b> .....	<b>47</b>
Pipe brackets .....	47
Fastenings for pipe brackets .....	50
Support shells .....	56
Sealings .....	57
Seals .....	59
Protection covers .....	64
Consumables .....	65





# Preliminary remarks

## Introduction to Geberit HDPE

The Geberit HDPE is the perfect commercial soil & waste and drainage system. With robust pipes available in all common diameters, from 32 mm to 315 mm, there is a comprehensive range of fittings and special fittings to suit most installations.

The piping material polyethylene is very light-weight, yet incredibly tough, and the connection technologies ensure permanent tightness and a high tensile strength.

The system includes thoroughly tested components for effective fire protection and sound insulation as well as practical tools for the building site and the workshop.

## Benefits of Geberit HDPE

### Light-weight

HDPE is light in weight compared to traditional cast iron

### Clean installation

No chemicals used in the installation process

### Chemical resistant

Resistant to a wide range of chemicals

### Temperature resistant

Resistant to hot and cold

### Impact resistant

Flexible materials absorbs impact

### Wide range of fittings

Can adapt to other materials, as well as special fittings such as the soil manifold and sovent.

### Technical assistance

Answer email & telephone enquiries, as well as project take offs

### Experienced

More than 60 years of practical experience in drainage technology

## Always consider

If you are unsure if Geberit HDPE can drain away your required chemical, take a look at the Geberit Drainage Installation Guide. If the required chemical does not appear in the list, please contact our technical team for approval.

Geberit HDPE is ideal for prefabrication, saving you time and money on site.

## Use the correct tooling

There are two main connection methods, butt-welding and electrowelding.

### Butt-welding:

- Great for prefabrication on or off site
- Media machine up to 160mm
- Universal machine up to 315mm

### Electrowelding:


- Great for on site installations
- Use AW 315G (from Advanced Welding) 110v for up to 315mm

If you require any technical assistance, please contact the technical department on 01926 516800, or email [technical@geberit.co.uk](mailto:technical@geberit.co.uk).



## Pipes

### Geberit HDPE pipe

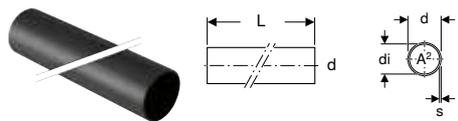

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics


- UV-resistant

#### Technical data

Product material	PE-HD
Thermal expansion	0.17 mm/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	A² [cm²]	PN [bar]	S	SU4 [m]	SU2 [m]	GBP/m
379.000.16.0	30	32	26	3	5	5.3	10.3	12.5	590	5	4.50
360.000.16.0	40	40	34	3	5	9	8.1	12.5	415	5	4.96
361.000.16.0	50	50	44	3	5	15.2	6.4	12.5	540	5	6.03
363.000.16.0	56	56	50	3	5	19.6	5.7	12.5	685	5	7.53
364.000.16.0	60	63	57	3	5	25.4	5	12.5	250	5	8.27
365.000.16.0	70	75	69	3	5	37.3	4.1	12.5	510	5	10.08
366.000.16.0	90	90	83	3.5	5	54.1	4	12.5	405	5	14.01
367.000.16.0	100	110	101.4	4.3	5	80.7	4	12.5	475	5	19.36
368.000.16.0	125	125	115.2	4.9	5	104.5	4	12.5	385	5	28.17
369.000.16.0	150	160	147.6	6.2	5	171.1	4	12.5	195	5	44.77
370.000.16.0	200	200	187.6	6.2	5	276.4	3.2	16	70	5	59.35
371.000.16.0	250	250	234.4	7.8	5	431.5	3.2	16	55	5	92.75
372.000.16.0	300	315	295.4	9.8	5	685.3	3.2	16	40	5	145.07

### Geberit HDPE pipe PN4

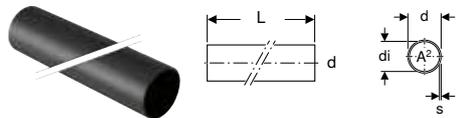

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For discharge pipes with increased negative pressure

#### Characteristics

- UV-resistant

#### Technical data

Product material	PE-HD
Thermal expansion	0.17 mm/(m·K)


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	A² [cm²]	PN [bar]	S	SU4 [m]	SU2 [m]	GBP/m
370.050.16.0	200	200	184.6	7.7	5	268.4	4	12.5	70	5	69.68
371.050.16.0	250	250	230.6	9.7	5	418.2	4	12.5	55	5	106.67
372.050.16.0	300	315	290.6	12.2	5	663.8	4	12.5	40	5	166.86



# Fittings

## Bends

### Geberit HDPE bend



click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics


- Can be welded on both sides with electrofusion coupling
- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\varnothing$ [mm]	X [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>arc / angle: 45°</b>									
360.045.16.1	40	40	4	2	2400	100	10	1	2.56
361.045.16.1	50	50	4.5	2	1600	100	10	1	2.84
363.045.16.1	56	56	4.5	2	1280	160	10	1	3.45
364.045.16.1	60	63	5	2	1040	260	10	1	3.76
365.045.16.1	70	75	5	2	800	100	10	1	5.56
366.045.16.1	90	90	5.5	2	480	60	10	1	7.63
367.045.16.1	100	110	6	2.5	280	70	10	1	8.34
368.045.16.1	125	125	6.5	2.5	200	50	10	1	13.51
369.045.16.1	150	160	6.9	2	120	10		1	34.87
370.045.16.1	200	200	18	2.5	28	7		1	97.87
<b>arc / angle: 88.5°</b>									
361.088.16.1	50	50	6	2	1200	50	10	1	3.69
363.088.16.1	56	56	6.5	2	1040	130	10	1	3.72
364.088.16.1	60	63	7	2	800	200	10	1	4.62
365.088.16.1	70	75	7.5	2	480	60	10	1	7.03
366.088.16.1	90	90	8	2	400	100	10	1	9.47
367.088.16.1	100	110	9.5	2.5	200	50	10	1	10.75
368.088.16.1	125	125	10	2.5	160	40	10	1	14.41
369.088.16.1	150	160	12	2.5	72	6		1	39.42

## Geberit HDPE bend with large leg

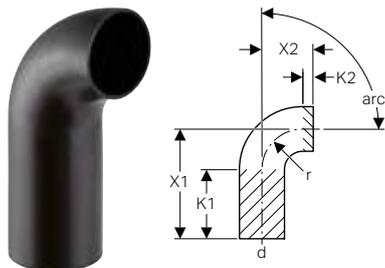

click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Large radius
- UV-resistant

### Technical data


Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\varnothing$ [mm]	X1 [cm]	X2 [cm]	K1 max. [cm]	K2 max. [cm]	r [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>arc / angle: 15°</b>												
367.015.16.1	100	110	18	7	15.5	4.5				10	1	27.21
369.015.16.1	150	160	7.5	7.5	4.5	4.5					1	54.43
<b>arc / angle: 30°</b>												
367.030.16.1	100	110	19.5	8.5	15.5	4.5			10		1	27.21
369.030.16.1	150	160	9.5	9.5	4.5	4.5				10	1	54.43
<b>arc / angle: 45°</b>												
365.046.16.1	70	75	9.1	5	6	2				10	1	10.64
367.046.16.1	100	110	14.7	6	11	2.5		160	40	10	1	10.70
<b>arc / angle: 90°</b>												
379.055.16.1	30	32	10	3	7		3	2400	100	10	1	4.87
360.055.16.1	40	40	15	3	12		3	1440	90	10	1	3.42
361.055.16.1	50	50	18	4	14		4	800	100	10	1	3.42
363.055.16.1	56	56	21	4	17		4	600	150	10	1	3.72
364.055.16.1	60	63	21	5	16		5	400	100	10	1	4.36
365.055.16.1	70	75	21	7	14		7	280	70	10	1	7.30
366.055.16.1	90	90	24	9	15		9	160	40	10	1	9.47
367.055.16.1	100	110	27	10	17		10	100	25		1	9.54
368.055.16.1	125	125	20	11	9		11	100	25		1	15.57
369.055.16.1	150	160	20	14	6		14	40	10		1	33.30



- Geberit HDPE bend with angles 15°, 30°, 45° and 88.5° can be welded on both legs with Geberit electrofusion couplings
- Geberit HDPE bend with angle 90° can be welded on the long leg with Geberit electrofusion couplings

## Geberit HDPE segment bend

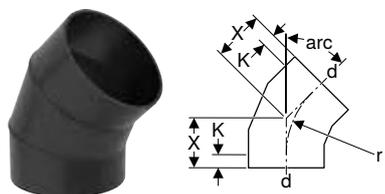

click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Can be welded on both sides with electrofusion coupling
- UV-resistant

### Technical data


Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\varnothing$ [mm]	X [cm]	K [cm]	r [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>arc / angle: 15°</b>									
370.015.16.1	200	200	15.5	4				1	91.73
371.015.16.1	250	250	10.3	0			36	1	126.05
372.015.16.1	300	315	10.3	0			20	1	149.01



Art. no.	DN	d, $\emptyset$ [mm]	X [cm]	K [cm]	r [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>arc / angle: 30°</b>									
370.030.16.1	200	200	15	2	20			1	91.74
371.030.16.1	250	250	16	0	42	24		1	123.44
372.030.16.1	300	315	17	0	47.3	12		1	171.31
<b>arc / angle: 45°</b>									
371.045.16.1	250	250	16.5	0	29	20	5	1	154.29
372.045.16.1	300	315	18	0	32.5	12		1	218.02
<b>arc / angle: 90°</b>									
370.055.16.1	200	200	30	2.5	20	20		1	168.21
371.055.16.1	250	250	33.5	0	29	12		1	277.76
372.055.16.1	300	315	37	0	32.5	6		1	404.86

### Geberit HDPE bend 90°, reduced, without leg



click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics


- Large radius
- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	arc [°]	X [cm]	r [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.872.16.1	50 / 40	50	40	90	4	4			10	1	3.96
363.873.16.1	56 / 50	56	50	90	4	4			10	1	5.28
364.873.16.1	60 / 50	63	50	90	5	5			10	1	5.28
364.874.16.1	60 / 56	63	56	90	5	5	1600	100	10	1	5.28

### Geberit HDPE BottomTurn bend



click & scan

#### Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)
- For use with Geberit HDPE Sovent fitting d110

#### Characteristics



- Can be welded on both sides with electrofusion coupling
- UV-resistant
- With SuperTube technology

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	Colour / surface	DN	d, $\emptyset$ [mm]	Discharge rate [l/s]	arc [°]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.615.16.1	black	100	110	≤ 12	90	6	1	197.13

### Geberit HDPE BackFlip bend



click & scan

**Application purposes**

- For building drainage
- For buildings with more than five floors (high-rise buildings)
- For use with Geberit HDPE Sovent fitting d110

**Characteristics**

- Can be welded on both sides with electrofusion coupling
- UV-resistant
- With SuperTube technology


**Technical data**

Product material	PE-HD
------------------	-------

Art. no.	Colour / surface	DN	d, ø [mm]	Discharge rate [l/s]	arc [°]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.616.16.1	black	100	110	≤ 12	90	6	1	91.18

### Branch fittings

#### Geberit HDPE branch fitting 45°

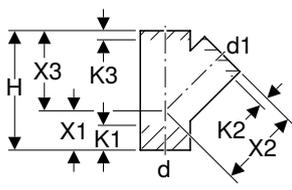

click & scan

**Application purposes**

- For building drainage
- For site drainage

**Characteristics**

- UV-resistant

**Technical data**


Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K2 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.108.16.1	30 / 30	32	32	45	10.5	3.5	7	7	2	2	2		50	10	1	6.50
360.108.16.1	40 / 30	40	32	45	13.5	4.5	9	9	3	3.5	3.5			10		6.50
360.109.16.1	40 / 40	40	40	45	13.5	4.5	9	9	2.5	3	3	960	40	10	1	6.50
361.109.16.1	50 / 40	50	40	45	16.5	5.5	11	11	4	4.5	4.5	640	40	10	1	6.80
361.112.16.1	50 / 50	50	50	45	16.5	5.5	11	11	3.5	2	2	560	140	10	1	6.80
363.112.16.1	56 / 50	56	50	45	18	6	12	12	4	3	3	400	100	10	1	6.86
363.115.16.1	56 / 56	56	56	45	18	6	12	12	4	2.5	2.5	440	110	10	1	6.86
364.109.16.1	60 / 40	63	40	45	19.5	6.5	13	13	4.5	4.5	4	400	100	10	1	7.23
364.112.16.1	60 / 50	63	50	45	19.5	6.5	13	13	5	3	3	320	20	10	1	7.23
364.115.16.1	60 / 56	63	56	45	19.5	6.5	13	13	4.5	2.5	2.5	360	90	10	1	7.23
364.120.16.1	60 / 60	63	63	45	19.5	6.5	13	13	4	2	2	320	80	10	1	7.23
365.109.16.1	70 / 40	75	40	45	21	7	14	14	6.5	5	6			10	1	8.50
365.112.16.1	70 / 50	75	50	45	21	7	14	14	6	3	4	240	60	10	1	8.50
365.115.16.1	70 / 56	75	56	45	21	7	14	14	5.5	2.5	3.5	240	60	10	1	8.50
365.120.16.1	70 / 60	75	63	45	21	7	14	14	4.5	2.5	3.5	240	60	10	1	8.50
365.125.16.1	70 / 70	75	75	45	21	7	14	14	4	2.5	2.5	240	60	10	1	8.50
366.109.16.1	90 / 40	90	40	45	24	8	16	16	7.5	5.5	6.5	160	40	10	1	11.78
366.112.16.1	90 / 50	90	50	45	24	8	16	16	8	4	5	160	40	10	1	11.78
366.115.16.1	90 / 56	90	56	45	24	8	16	16	7.5	3.5	4.5	160	10		1	11.78
366.120.16.1	90 / 60	90	63	45	24	8	16	16	7	3	4	180	45		1	11.78
366.125.16.1	90 / 70	90	75	45	24	8	16	16	6.5	3	3.5	160	40		1	11.78
366.130.16.1	90 / 90	90	90	45	24	8	16	16	5	2	2	160	10		1	11.78
367.109.16.1	100 / 40	110	40	45	27	9	18	18	9.5	6	7.5	160	20		1	14.88
367.112.16.1	100 / 50	110	50	45	27	9	18	18	9.5	5	5.5	160	20		1	14.88
367.115.16.1	100 / 56	110	56	45	27	9	18	18	9	4	4.5	160	20		1	14.88
367.120.16.1	100 / 60	110	63	45	27	9	18	18	8.5	3.5	4	160	20		1	14.88
367.125.16.1	100 / 70	110	75	45	27	9	18	18	7.5	3	3.5	160	20		1	14.88
367.130.16.1	100 / 90	110	90	45	27	9	18	18	6.5	2.5	3	160	20		1	14.88
367.135.16.1	100 / 100	110	110	45	27	9	18	18	5.5	2	2	160	20		1	14.88



Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3	K1 max.	K2 max.	K3 max.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
368.120.16.1	125 / 60	125	63	45	30	10	20	20	10.5	4.5	6	80	20		1	20.42
368.125.16.1	125 / 70	125	75	45	30	10	20	20	9.5	4	5	80	20		1	20.42
368.130.16.1	125 / 90	125	90	45	30	10	20	20	8.5	3	3.5	60	15		1	20.42
368.135.16.1	125 / 100	125	110	45	30	10	20	20	7	2.5	2.5	60	15		1	20.42
368.139.16.1	125 / 125	125	125	45	30	10	20	20	6	2	2	80	20		1	20.42
369.125.16.1	150 / 70	160	75	45	37.5	12.5	25	25	13.5	6.5	7.5	40	5		1	69.66
369.130.16.1	150 / 90	160	90	45	37.5	12.5	25	25	12.5	5.5	6.5			5	1	69.66
369.135.16.1	150 / 100	160	110	45	37.5	12.5	25	25	11	4.5	5.5	40		5	1	69.66
369.139.16.1	150 / 125	160	125	45	37.5	12.5	25	25	10	4	5	40	5		1	69.66
369.145.16.1	150 / 150	160	160	45	37.5	12.5	25	25	7.5	2.5	2.5	32	4		1	69.66
370.125.16.1	200 / 70	200	75	45	54	18	36	36	8.5	10	2.5	18			1	152.87
370.135.16.1	200 / 100	200	110	45	54	18	36	36	7.5	10	0	20		5	1	152.87
370.139.16.1	200 / 125	200	125	45	54	18	36	36	5.5	9	0	16		4	1	152.87
370.145.16.1	200 / 150	200	160	45	54	18	36	36	4	5.5	0	16		4	1	159.02
370.146.16.1	200 / 200	200	200	45	54	18	36	36	0	0	0	14			1	229.32
371.135.16.1	250 / 100	250	110	45	66	22	44	44	14	10	7.5	9			1	262.33
371.139.16.1	250 / 125	250	125	45	66	22	44	44	13	13	6.5	9			1	262.33
371.145.16.1	250 / 150	250	160	45	66	22	44	44	10.5	10	0	9			1	277.76
371.146.16.1	250 / 200	250	200	45	66	22	44	44	7.5	0	1.5	8			1	277.76
371.147.16.1	250 / 250	250	250	45	66	22	44	44	4	0	0	8			1	370.32
372.135.16.1	300 / 100	315	110	45	84	28	56	56	23	20	16	4			1	435.99
372.139.16.1	300 / 125	315	125	45	84	28	56	56	21.5	20	14.5	4			1	435.99
372.145.16.1	300 / 150	315	160	45	84	28	56	56	19.5	17.5	12.5	4			1	435.99
372.146.16.1	300 / 200	315	200	45	84	28	56	56	16.5	5	10	4			1	467.12
372.147.16.1	300 / 250	315	250	45	84	28	56	56	13	5.5	6.5	3			1	467.12
372.148.16.1	300 / 300	315	315	45	84	28	56	56	8.5	2	2	3			1	560.59

## Geberit HDPE branch fitting 88.5°, swept entry

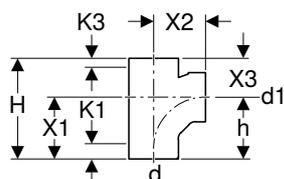

click & scan

### Application purposes

- For building drainage

### Technical data


Product material	PE-HD
------------------	-------

### Characteristics

- Swept entry
- UV-resistant

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	h [cm]	X1 [cm]	X2 [cm]	X3	K1 max.	K3 max.	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
367.163.16.1	100 / 100	110	110	88.5	22.5	13.8	13.5	11.5	9	2.5	0	120	30	1	15.15

## Geberit HDPE branch fitting 88.5°



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- UV-resistant

### Technical data


Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K2 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.158.16.1	30/30	32	32	88.5	8.5	5	3.5	3.5	2.5	1	1		50	10	1	6.50
360.158.16.1	40/30	40	32	88.5	13	7.5	5.5	5.5	5	2.5	2			10	1	6.50
360.159.16.1	40/40	40	40	88.5	13	7.5	5.5	5.5	4.5	2.5	2.5		90	10	1	6.50
361.159.16.1	50/40	50	40	88.5	15	9	6	6	6	2.5	3			10	1	6.80
361.162.16.1	50/50	50	50	88.5	15	9	6	6	5.5	2.5	2.5	800	50	10	1	6.80
363.162.16.1	56/50	56	50	88.5	17.5	10.5	7	7	7	3	3.5			10	1	6.86
363.165.16.1	56/56	56	56	88.5	17.5	10.5	7	7	6.5	3	3	480	30	10	1	6.86
364.159.16.1	60/40	63	40	88.5	17.5	10.5	7	7	7	3	3			10	1	7.23
364.162.16.1	60/50	63	50	88.5	17.5	10.5	7	7	7	3	3.5			10	1	7.23
364.165.16.1	60/56	63	56	88.5	17.5	10.5	7	7	6.5	3	3	480	120	10	1	7.23
364.170.16.1	60/60	63	63	88.5	17.5	10.5	7	7	6	3	3	480	120	10	1	7.23
365.159.16.1	70/40	75	40	88.5	17.5	10.5	7	7	7.5	2.5	4			10	1	9.03
365.162.16.1	70/50	75	50	88.5	17.5	10.5	7	7	7	2.5	3.5	360	90	10	1	9.03
365.165.16.1	70/56	75	56	88.5	17.5	10.5	7	7	6.5	2.5	3	360	90	10	1	9.03
365.170.16.1	70/60	75	63	88.5	17.5	10.5	7	7	6	2.5	2.5		90	10	1	9.03
365.175.16.1	70/70	75	75	88.5	17.5	10.5	7	7	5.5	2.5	2.5	320	80	10	1	9.03
366.159.16.1	90/40	90	40	88.5	20	12	8	8	8.5	2.5	4.5	240	60		1	11.17
366.162.16.1	90/50	90	50	88.5	20	12	8	8	8.5	2.5	4.5	160	10		1	11.17
366.165.16.1	90/56	90	56	88.5	20	12	8	8	8	2.5	4	160	10		1	11.17
366.170.16.1	90/60	90	63	88.5	20	12	8	8	7.5	2.5	3.5	240	60		1	11.17
366.175.16.1	90/70	90	75	88.5	20	12	8	8	7	2.5	3	160	10		1	11.17
366.180.16.1	90/90	90	90	88.5	20	12	8	8	6.5	2.5	2.5	160	10		1	11.17
367.159.16.1	100/40	110	40	88.5	22.5	13.5	9	9	10	2.5	6	160	40		1	13.42
367.162.16.1	100/50	110	50	88.5	22.5	13.5	9	9	9.5	2.5	5	160	40		1	13.42
367.165.16.1	100/56	110	56	88.5	22.5	13.5	9	9	9	2.5	4.5	160	40		1	13.42
367.170.16.1	100/60	110	63	88.5	22.5	13.5	9	9	9	2.5	4	160	40		1	13.42
367.175.16.1	100/70	110	75	88.5	22.5	13.5	9	9	8.5	2.5	3.5	140	35		1	13.42
367.180.16.1	100/90	110	90	88.5	22.5	13.5	9	9	7.5	2.5	3	120	30		1	13.42
367.185.16.1	100/100	110	110	88.5	22.5	13.5	9	9	6.5	2	2	120	30		1	13.42
368.162.16.1	125/50	125	50	88.5	25	15	10	10	11	2.5	6	80	5		1	20.42
368.165.16.1	125/56	125	56	88.5	25	15	10	10	10.5	2.5	5.5	80	5		1	20.42
368.170.16.1	125/60	125	63	88.5	25	15	10	10	10.5	2.5	5	80	5		1	20.42
368.175.16.1	125/70	125	75	88.5	25	15	10	10	10	2.5	4.5	80	5		1	20.42
368.180.16.1	125/90	125	90	88.5	25	15	10	10	9	2.5	4	80	5		1	20.42
368.185.16.1	125/100	125	110	88.5	25	15	10	10	8	2	3	100	25		1	20.42
368.189.16.1	125/125	125	125	88.5	25	15	10	10	7	2	2	80	20		1	20.42
369.175.16.1	150/70	160	75	88.5	35	21	14	14	15	4.5	8			5	1	75.81
369.185.16.1	150/100	160	110	88.5	35	21	14	14	13.5	4.5	6	40		5	1	75.81
369.189.16.1	150/125	160	125	88.5	35	21	14	14	12.5	4.5	5				1	75.81
369.195.16.1	150/150	160	160	88.5	35	21	14	14	10.5	3.5	3			5	1	75.81
370.180.16.1	200/90	200	90	88.5	36	18	18	18	0	3	0	20			1	214.03
370.185.16.1	200/100	200	110	88.5	36	18	18	18	0	3	0	32			1	152.87
370.189.16.1	200/125	200	125	88.5	36	18	18	18	0	3	0	32			1	152.87
370.195.16.1	200/150	200	160	88.5	36	18	18	18	0	2	0	30			1	152.87
370.196.16.1	200/200	200	200	88.5	40	20	20	20	0	0	0	20			1	152.87
371.185.16.1	250/100	250	110	88.5	44	22	22	22	3.5	4	3.5	15			1	216.04
371.189.16.1	250/125	250	125	88.5	44	22	22	22	3	4	3	8			1	216.04
371.195.16.1	250/150	250	160	88.5	44	22	22	22	0	3.5	0	16			1	216.04
371.196.16.1	250/200	250	200	88.5	48	24	24	24	0	0	0	14			1	216.04
371.197.16.1	250/250	250	250	88.5	48	24	24	24	0	0	0	13			1	216.04
372.185.16.1	300/100	315	110	88.5	56	28	28	28	9.5	6	9.5	6			1	249.16
372.189.16.1	300/125	315	125	88.5	56	28	28	28	9	6	9	6			1	249.16
372.195.16.1	300/150	315	160	88.5	56	28	28	28	7	6	7	6			1	249.16



Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3	K1 max.	K2 max.	K3 max.	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
372.196.16.1	300 / 200	315	200	88.5	56	28	28	28	4.5	0	4.5	6			1	249.16
372.197.16.1	300 / 250	315	250	88.5	56	28	28	28	2	0	2	6			1	249.16
372.198.16.1	300 / 300	315	315	88.5	56	28	28	28	0	0	0	5			1	311.42

## Geberit HDPE double branch fitting 45°

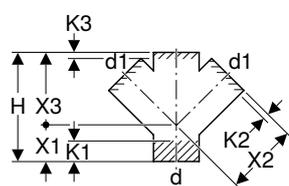

click & scan

### Application purposes

- For building drainage
- For site drainage
- For vertical installation

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3	K1 max.	K2 max.	K3 max.	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
367.209.16.1	100 / 40	110	40	45	27	9	18	18	9.5	6	7.5			1	26.83
367.212.16.1	100 / 50	110	50	45	27	9	18	18	9.5	6	7.5	100	25	1	26.83
367.235.16.1	100 / 100	110	110	45	27	9	18	18	5	1.5	1.5	72	18	1	26.83

## Geberit HDPE double branchball 88.5°, connections 90° offset

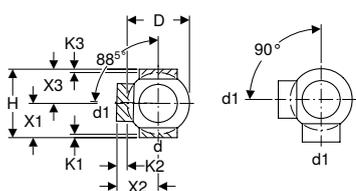

click & scan

### Application purposes

- For building drainage

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	arc2 [°]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3	K1 max.	K2 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
364.320.16.1	60 / 60	63	63	88.5	90	10	16	8	10	8	1.5	4.5	1.5			1	40.44
365.325.16.1	70 / 70	75	75	88.5	90	12	16	8	10	8	1.5	3.5	1.5			1	40.84
366.330.16.1	90 / 90	90	90	88.5	90	14	18	9	11	9	2	4	2			1	44.15
367.315.16.1	100 / 56	110	56	88.5	90	17	20	10	12	10	1.5	1.5	1.5			1	50.50
367.320.16.1	100 / 60	110	63	88.5	90	17	20	10	12	10	1.5	1.5	1.5			1	50.50
367.325.16.1	100 / 70	110	75	88.5	90	17	20	10	12	10	1.5	1.5	1.5			1	50.50
367.330.16.1	100 / 90	110	90	88.5	90	17	20	10	12	10	1.5	1.5	1.5			1	50.50
367.335.16.1	100 / 100	110	110	88.5	90	17	20	10	12	10	1.5	4	1.5	96	12	1	50.50
368.335.16.1	125 / 100	125	110	88.5	90	18	20	10	12.5	10	1.5	4	1.5			1	51.02
369.335.16.1	150 / 100	160	110	88.5	90	23	25	12.5	16	12.5	2	1.5	2			1	90.92

### Geberit HDPE double branchball 88.5°, connections 135° offset

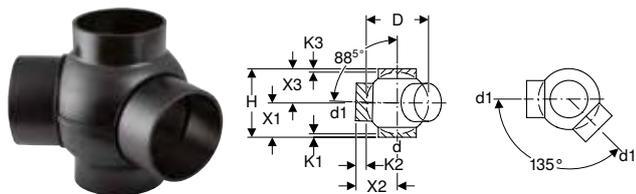

click & scan

**Application purposes**

- For building drainage

**Characteristics**


- UV-resistant

**Technical data**

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	arc2 [°]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K2 max. [cm]	K3 max. [cm]	SU1 [pc.]	GBP/pc.
364.370.16.1	60 / 60	63	63	88.5	135	10	16	8	10	8	1.5	4.5	1.5	1	43.39
365.375.16.1	70 / 70	75	75	88.5	135	12	16	8	10	8	1.5	3.5	1.5	1	43.78
366.380.16.1	90 / 90	90	90	88.5	135	14	18	9	11	9	2	4	2	1	47.11
367.362.16.1	100 / 40	110	50	88.5	135	17	20	10	12	10	1.5	1.5	1.5	1	53.50
367.365.16.1	100 / 56	110	56	88.5	135	17	20	10	12	10	1.5	1.5	1.5	1	53.50
367.370.16.1	100 / 60	110	63	88.5	135	17	20	10	12	10	1.5	1.5	1.5	1	53.50
367.375.16.1	100 / 70	110	75	88.5	135	17	20	10	12	10	1.5	1.5	1.5	1	53.50
367.380.16.1	100 / 90	110	90	88.5	135	17	20	10	12	10	1.5	1.5	1.5	1	53.50
367.385.16.1	100 / 100	110	110	88.5	135	17	20	10	12	10	1.5	4	1.5	1	53.50
368.385.16.1	125 / 100	125	110	88.5	135	18	20	10	12.5	10	1.5	4	1.5	1	60.00
369.385.16.1	150 / 100	160	110	88.5	135	23	25	12.5	16	12.5	2	1.5	2	1	90.92

### Geberit HDPE double branchball 88.5°, connections 180° offset

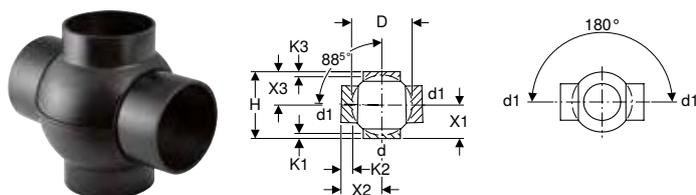

click & scan

**Application purposes**

- For building drainage

**Characteristics**

- UV-resistant


**Technical data**

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	arc2 [°]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K2 max. [cm]	K3 max. [cm]	SU1 [pc.]	GBP/pc.
364.270.16.1	60 / 60	63	63	88.5	180	10	16	8	10	8	1.5	4.5	1.5	1	40.44
365.275.16.1	70 / 70	75	75	88.5	180	12	16	8	10	8	1.5	3.5	1.5	1	40.84
366.280.16.1	90 / 90	90	90	88.5	180	14	18	9	11	9	2	4	2	1	44.15
367.262.16.1	100 / 50	110	50	88.5	180	17	20	10	12	10	1.5	1.5	1.5	1	50.50
367.265.16.1	100 / 56	110	56	88.5	180	17	20	10	12	10	1.5	1.5	1.5	1	50.50
367.270.16.1	100 / 60	110	63	88.5	180	17	20	10	12	10	1.5	1.5	1.5	1	50.50
367.275.16.1	100 / 70	110	75	88.5	180	17	20	10	12	10	1.5	1.5	1.5	1	50.50
367.280.16.1	100 / 90	110	90	88.5	180	17	20	10	12	10	1.5	1.5	1.5	1	50.50
367.285.16.1	100 / 100	110	110	88.5	180	17	20	10	12	10	1.5	4	1.5	1	50.50
368.285.16.1	125 / 100	125	110	88.5	180	18	20	10	12.5	10	1.5	4	1.5	1	51.02
369.285.16.1	150 / 100	160	110	88.5	180	23	25	12.5	16	12.5	2	1.5	2	1	90.92



## Geberit HDPE triple branchball 88.5°, connections 90° offset

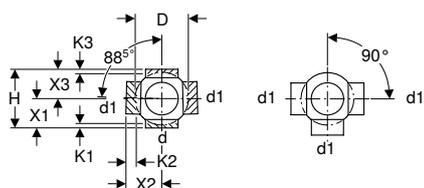

click & scan

### Application purposes

- For building drainage

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	arc [°]	arc2 [°]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K2 max. [cm]	K3 max. [cm]	SU1 [pc.]	GBP/pc.
364.605.16.1	60 / 60	63	63	88.5	90	10	16	8	10	8	1.5	4.5	1.5	1	51.98
365.605.16.1	70 / 70	75	75	88.5	90	12	16	8	10	8	1.5	3.5	1.5	1	52.48
366.605.16.1	80 / 80	90	90	88.5	90	14	18	9	11	9	2	4	2	1	58.88
367.605.16.1	100 / 100	110	110	88.5	90	17	20	10	12	10	1.5	4	1.5	1	59.47
368.605.16.1	125 / 100	125	110	88.5	90	18	20	10	12	10	1.5	4	1.5	1	69.06
369.605.16.1	150 / 100	160	110	88.5	90	23	25	12.5	16	12.5	2	1.5	2	1	97.65

## Geberit HDPE triple branchball 88.5°, connections 135° offset

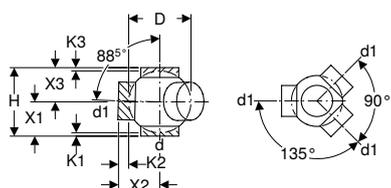

click & scan

### Application purposes

- For building drainage

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	arc [°]	arc2 [°]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K2 max. [cm]	K3 max. [cm]	SU1 [pc.]	GBP/pc.
364.600.16.1	60 / 60	63	63	88.5	135	10	16	8	10	8	1.5	4.5	1.5	1	47.32
365.600.16.1	70 / 70	75	75	88.5	135	12	16	8	10	8	1.5	3.5	1.5	1	61.28
367.600.16.1	100 / 100	110	110	88.5	135	17	20	10	12	10	1.5	4	1.5	1	61.52
368.600.16.1	125 / 100	125	110	88.5	135	18	20	10	12	10	1.5	4	1.5	1	71.35

## Geberit HDPE quadruple branchball 88.5°, connections 90° offset

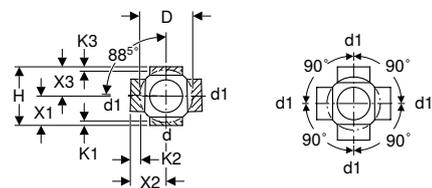

click & scan

### Application purposes

- For building drainage

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	arc [°]	arc2 [°]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K2 max. [cm]	K3 max. [cm]	SU1 [pc.]	GBP/pc.
364.610.16.1	60 / 60	63	63	88.5	90	10	16	8	10	8	1.5	4.5	1.5	1	54.90
365.610.16.1	70 / 70	75	75	88.5	90	12	16	8	10	8	1.5	3.5	1.5	1	55.43
367.610.16.1	100 / 100	110	110	88.5	90	17	20	10	12	10	1.5	4	1.5	1	68.37
368.610.16.1	125 / 100	125	110	88.5	90	18	20	10	12.5	10	1.5	4	1.5	1	75.03
369.610.16.1	150 / 100	160	110	88.5	90	23	25	12.5	16	12.5	2	1.5	2	1	126.65

### Geberit HDPE quadruple branch fitting 88.5°

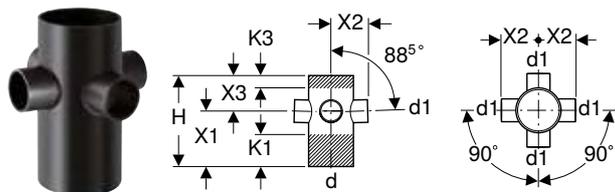

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics


- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
367.445.16.1	100 / 56	110	56	88.5	22.5	13.5	9	9	7.5	3	120	15	1	55.00

### Geberit HDPE breeches branch fitting 2 x 30°

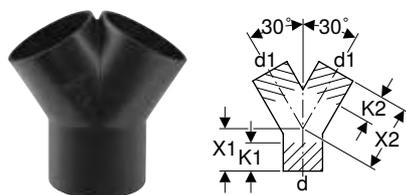

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For vertical installation

#### Characteristics

- UV-resistant


#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	X1 [cm]	X2 [cm]	K1 max. [cm]	K2 max. [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.459.16.1	50 / 40	50	40	30	5.5	11	4	5	10	1	8.51
361.462.16.1	50 / 50	50	50	30	5.5	11	3	4	10	1	12.75
363.462.16.1	56 / 50	56	50	30	6	12	4	5	10	1	12.90
363.465.16.1	56 / 56	56	56	30	1.8	5.3	0	0	10	1	12.90
364.462.16.1	60 / 50	63	50	30	6.5	13	5	6	10	1	14.47
364.465.16.1	60 / 56	63	56	30	6.5	13	4	6	10	1	14.47
365.465.16.1	70 / 56	75	56	30	7	14	6	7	10	1	18.41
365.470.16.1	70 / 60	75	63	30	7	14	5	6	10	1	18.41
367.480.16.1	100 / 90	110	90	30	9	18	7	7	8	1	23.78
367.481.16.1	100 / 100	110	110	30	9	10.2	5	0		1	23.78



## Geberit HDPE breeches branch fitting 2 x 90°

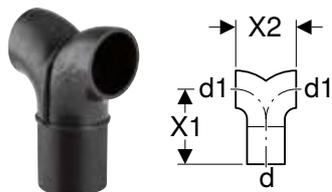

click & scan

### Application purposes

- For building drainage
- For site drainage
- For vertical installation

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	X1 [cm]	X2 [cm]	SU1 [pc.]	GBP/pc.
361.498.16.1	50 / 50	50	50	90	10	8	1	35.35

## Geberit HDPE breeches branch fitting 2 x 90° with large legs

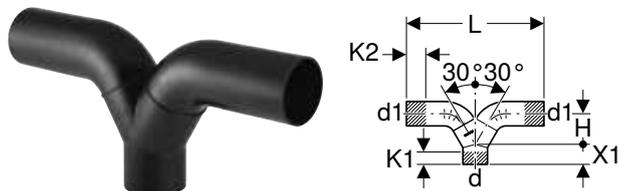

click & scan

### Application purposes

- For building drainage
- For vertical installation

### Characteristics

- UV-resistant


### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	H [cm]	X1 [cm]	K1 max. [cm]	K2 max. [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
363.457.16.1	56 / 50	56	50	90	41.5	7.5	6	4.3	14	5	1	60.78
367.003.16.1	100 / 100	110	110	90	68.5	11	9.8	5	20.4		1	127.18
367.458.16.1	100 / 100	110	110	90	61.7	13	9.8	5	17		1	116.99

## Reducers

### Geberit HDPE reducer, eccentric, short

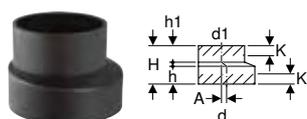

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics


- Eccentric
- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	A [cm]	H [cm]	h [cm]	h1 [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.558.16.1	50 / 40	50	40	0.5	8	3.5	3.7	2		100	10	1	3.69
363.558.16.1	56 / 40	56	40	0.8	8	3.5	3.7	2	1200	50	10	1	3.99
363.561.16.1	56 / 50	56	50	0.3	8	3.5	3.7	2	1600	100	10	1	3.99
364.558.16.1	60 / 40	63	40	1.2	8	3.5	3.7	2			10	1	4.36
364.561.16.1	60 / 50	63	50	0.7	8	3.5	3.7	2	1200	50	10	1	4.36
364.566.16.1	60 / 56	63	56	0.4	8	3.5	3.7	2	1200	50	10	1	4.36
365.558.16.1	70 / 40	75	40	1.8	8	3.5	3.7	2				10	4.99
365.561.16.1	70 / 50	75	50	1.3	8	3.5	3.7	2	1200	50	10	1	4.99
365.566.16.1	70 / 56	75	56	1	8	3.5	3.7	2	800	50	10	1	4.99
365.571.16.1	70 / 60	75	63	0.6	8	3.5	3.7	2	800	50	10	1	4.99
366.561.16.1	90 / 50	90	50	2	8	3.5	3.7	2	800	50	10	1	6.78
366.566.16.1	90 / 56	90	56	1.7	8	3.5	3.7	2			10	1	6.78
366.571.16.1	90 / 60	90	63	1.3	8	3.5	3.7	2		50	10	1	6.78
366.576.16.1	90 / 70	90	75	0.8	8	3.5	3.7	2		50	10	1	6.78
367.558.16.1	100 / 40	110	40	3.4	8	3.5	3.7	2				10	7.45
367.561.16.1	100 / 50	110	50	2.9	8	3.5	3.7	2	600	50	10	1	7.45
367.566.16.1	100 / 56	110	56	2.6	8	3.5	3.7	2	600	50	10	1	7.45
367.571.16.1	100 / 60	110	63	2.2	8	3.5	3.7	2	720	180	10	1	7.45
367.576.16.1	100 / 70	110	75	1.6	8	3.5	3.7	2	600	50	10	1	7.45
367.581.16.1	100 / 90	110	90	0.9	8	3.5	3.7	2	480	60	10	1	7.45
368.561.16.1	125 / 50	125	50	3.6	8	3.5	3.7	2				10	12.01
368.566.16.1	125 / 56	125	56	3.3	8	3.5	3.7	2		50	10	1	13.51
368.571.16.1	125 / 60	125	63	2.9	8	3.5	3.7	2				10	13.51
368.576.16.1	125 / 70	125	75	2.3	8	3.5	3.7	2				10	13.51
368.581.16.1	125 / 90	125	90	1.6	8	3.5	3.7	2				10	13.51
368.586.16.1	125 / 100	125	110	0.7	8	3.5	3.7	2	440	110	10	1	13.51
369.586.16.1	150 / 100	160	110	2.3	8	3.5	3.7	2		40	10	1	16.68
369.588.16.1	150 / 125	160	125	1.6	8	3.5	3.7	2		20	10	1	16.68
369.591.16.1	150 / 140	160	140	1	8	3.5	3.7	2				1	26.36

### Geberit HDPE reducer, eccentric, long

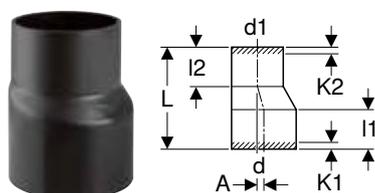

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics

- Eccentric
- UV-resistant

#### Technical data


Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	A [cm]	L [cm]	l1 [cm]	l2 [cm]	K1 max. [cm]	K2 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
368.584.16.1	125 / 100	125	110	0.7	16	7	6.4	4	3	200	50	10	1	13.51
369.584.16.1	150 / 100	160	110	2.5	28	9.4	6.4	6	3	96		12	1	90.92
369.587.16.1	150 / 125	160	125	1.7	24	9.4	8	6	5	120		10	1	90.92
370.584.16.5	200 / 100	200	110	4.3	28	11.5	3.7	4	0			5	1	115.30



Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	L [cm]	I1 [cm]	I2 [cm]	K1 max. [cm]	K2 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
370.587.16.5	200 / 125	200	125	3.6	28	11.5	3.7	4	0			10	1	115.30
370.594.16.5	200 / 150	200	160	2	28	11.9	9.1	4	6			5	1	115.30
371.596.16.1	250 / 200	250	200	2.5	40.5	15.8	15.7	8	8	20		5	1	200.60
372.596.16.1	300 / 200	315	200	5.7	58	16.1	15.7	8	8				1	280.28
372.598.16.1	300 / 250	315	250	3.2	43.5	16.1	15.7	8	8				1	280.28

## Geberit HDPE reducer, concentric, short



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Concentric
- UV-resistant


### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.557.16.1	40 / 30	40	32	8	3	1.5		100	10	1	3.10
361.557.16.1	50 / 30	50	32	8	3	1.5		100	10	1	3.10
361.559.16.1	50 / 40	50	40	8	3	1.5	2000	50	10	1	3.10
363.559.16.1	56 / 40	56	40	8	3	1.5		80	10	1	3.45
363.560.16.1	56 / 50	56	50	8	3	1.5	1440	60	10	1	3.45
364.559.16.1	60 / 40	63	40	8	3	1.5			10	1	3.46
364.560.16.1	60 / 50	63	50	8	3	1.5		50	10	1	3.46
364.565.16.1	60 / 56	63	56	8	3	1.5		100	10	1	3.46
365.559.16.1	70 / 40	75	40	8	3	1.5			10	1	4.10
365.560.16.1	70 / 50	75	50	8	3	1.5		50	10	1	4.10
365.565.16.1	70 / 56	75	56	8	3	1.5		50	10	1	4.10
365.570.16.1	70 / 60	75	63	8	3	1.5	800	50	10	1	4.10
366.559.16.1	90 / 40	90	40	8	3	1.5			10	1	5.32
366.560.16.1	90 / 50	90	50	8	3	1.5			10	1	5.32
366.565.16.1	90 / 56	90	56	8	3	1.5			10	1	5.32
366.570.16.1	90 / 60	90	63	8	3	1.5			10	1	5.32
366.575.16.1	90 / 70	90	75	8	3	1.5		50	10	1	5.32
367.559.16.1	100 / 40	110	40	8	3	1.5			10	1	6.54
367.560.16.1	100 / 50	110	50	8	3	1.5			10	1	6.54
367.565.16.1	100 / 56	110	56	8	3	1.5	600	50	10	1	6.54
367.570.16.1	100 / 60	110	63	8	3	1.5		180	10	1	6.54
367.575.16.1	100 / 70	110	75	8	3	1.5		50	10	1	6.54
367.580.16.1	100 / 90	110	90	8	3	1.5	560	70	10	1	6.54
368.570.16.1	125 / 60	125	63	8	3	1.5			10	1	10.51
368.575.16.1	125 / 70	125	75	8	3	1.5			10	1	10.51
368.580.16.1	125 / 90	125	90	8	3	1.5			10	1	10.51
368.585.16.1	125 / 100	125	110	8	3	1.5	440	110	10	1	10.51
369.535.16.1	150 / 100	160	110	4	0.6	0			10	1	13.67

## Access pipes

### Geberit HDPE access pipe 45° with round service opening

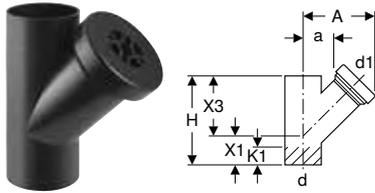

click & scan

#### Application purposes

- For building drainage

#### Technical data

Product material	PE-HD
------------------	-------

#### Characteristics


- UV-resistant

#### Scope of delivery

- Seal made of EPDM
- Screw cap made of PP

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	H [cm]	X1 [cm]	X3 [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
367.453.16.1	100 / 100	110	110	45	19.5	6.5	27	9	18	5.5	80	20	1	43.13
368.453.16.1	125 / 100	125	110	45	20	7	30	10	20	7	60	15	1	49.54
369.453.16.1	150 / 100	160	110	45	22	9	37.5	12.5	25	11			1	106.03

### Geberit HDPE access pipe 90° with round service opening

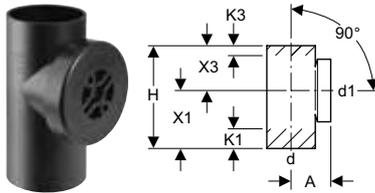

click & scan

#### Application purposes

- For building drainage

#### Technical data

Product material	PE-HD
------------------	-------

#### Characteristics


- UV-resistant

#### Scope of delivery

- Seal made of EPDM
- Screw cap made of PP

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	H [cm]	X1 [cm]	X3 [cm]	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
364.451.16.1	60 / 60	63	63	90	9	17.5	10.5	7	4.5	0	320	20	1	28.87
365.451.16.1	70 / 70	75	75	90	9.5	17.5	10.5	7	3.5	0	240	30	1	32.06
366.451.16.1	90 / 90	90	90	90	11	20	12	8	3	0	160	40	1	42.69
367.451.16.1	100 / 100	110	110	90	9	24	13.5	10.5	4.5	0	100	25	1	44.61
368.451.16.1	125 / 100	125	110	90	13	25	15	10	6	1	80	20	1	54.02
369.451.16.1	150 / 100	160	110	90	15	35	21	14	12	4	40	10	1	106.03

### Geberit HDPE access pipe 90° with oval service opening

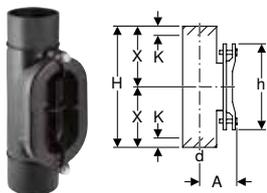

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Technical data

Product material	PE-HD
------------------	-------

#### Characteristics

- UV-resistant

#### Scope of delivery

- Seal made of EPDM
- Cover, grey cast iron, dip-coated black


Art. no.	DN	d, ø [mm]	arc [°]	A [cm]	H [cm]	h [cm]	X [cm]	K [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
367.454.16.1	100	110	90	12	40	28	20	3		1	219.97
368.454.16.1	125	125	90	12.5	41	28	20.5	4		1	330.16
369.454.16.1	150	160	90	14	43	28	21.5	4		1	363.54



Art. no.	DN	d, ø [mm]	arc [°]	A [cm]	H [cm]	h [cm]	X [cm]	K [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
370.454.16.1	200	200	90	17.5	65	38	32.5	5.5	12	1	672.70
371.454.16.1	250	250	90	20	58	38	29	3	8	1	925.81
372.454.16.1	300	315	90	23	62	38	31	8	6	1	1027.71

## Adaptors

### Geberit HDPE adaptor socket

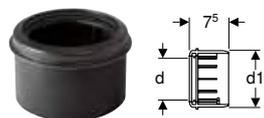

click & scan

#### Application purposes

- For building drainage
- Suitable exclusively for connecting connection bends for WCs

#### Characteristics

- Pluggable for multiple combinations
- With lip seal made of EPDM
- UV-resistant


#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.928.16.1	90 / 100	90	110	7.5	600	10	1	25.16

## Special fittings

### Geberit HDPE Sovent fitting

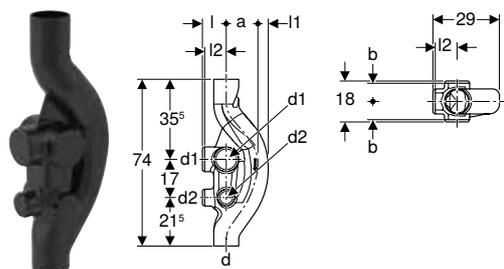

click & scan

#### Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)

#### Characteristics


- Six connection options, closed
- UV-resistant
- With SuperTube technology

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	d1, ø [mm]	d2, ø [mm]	a [cm]	l [cm]	l1 [cm]	l2 [cm]	b [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.614.16.1	100 / 100 / 70	110	≤ 12	110	75	13	10.5	5.5	9.5	8	48	6	1	127.85

## Geberit HDPE Sovent fitting

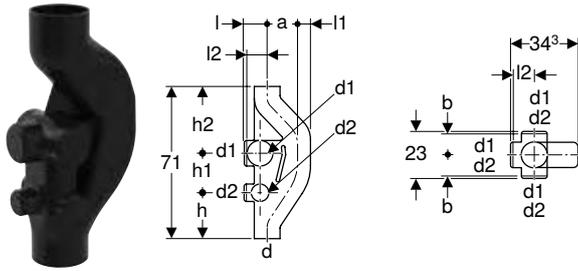

click & scan

### Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)

### Characteristics


- Six connection options, closed
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	d1, ø [mm]	d2, ø [mm]	a [cm]	l [cm]	l1 [cm]	l2 [cm]	b [cm]	h [cm]	h1 [cm]	h2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
369.001.16.1	150 / 100 / 70	160	≤ 17	110	75	13.3	13	8	11	9.5	19	17	35	3	1	172.70

## Geberit PE protecting cap

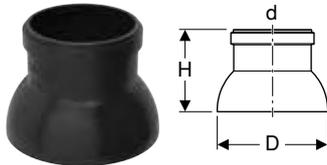

click & scan

### Application purposes

- For building drainage
- For enclosing ventilation pipes
- For sliding on

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	Colour / surface	DN	d, ø [mm]	D [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
364.989.16.2	black	60	63	10	8.7		1	40.44
365.989.16.2	black	70	75	12	10.1	10	1	43.78
366.989.16.2	black	90	90	14	11.4	10	1	47.11
367.989.16.2	black	100	110	17	12.8	10	1	53.50
368.989.16.2	black	125	125	18	13.1		1	96.05
369.989.16.2	black	150	160	23	16.7		1	127.24

## Geberit HDPE waste manifold

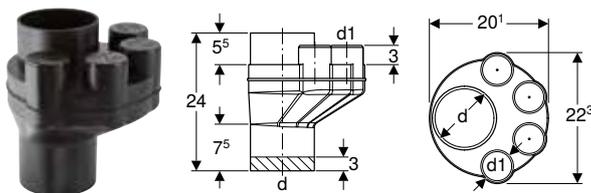

click & scan

### Application purposes

- For building drainage

### Characteristics

- Four connection options, closed
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.612.16.1	100 / 56	110	56	72	6	1	100.35



# Connections

## Welding joints

### Geberit electrofusion coupling



click & scan

#### Application purposes

- For site drainage
- For building drainage
- For high-tensile, permanent connection of pipes and fittings

#### Characteristics

- Can be welded with Geberit electrofusion tools
- UV-resistant

#### Technical data


Installation temperature	-10 – +40 °C
Product material	PE-HD

Art. no.	DN	d, ø [mm]	D [cm]	E [cm]	H [cm]	X [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.771.16.1	40	40	5.2	2.8	6	0.3	3024	36	12	1	5.65
361.771.16.1	50	50	6.2	2.8	6	0.3	2376	36	12	1	5.65
363.771.16.1	56	56	6.8	2.8	6	0.3	1800	36	12	1	6.21
364.771.16.1	60	63	7.6	2.8	6	0.3	1512	36	12	1	6.94
365.771.16.1	70	75	8.9	2.8	6	0.3	1152	72	12	1	7.30
366.771.16.1	90	90	10.4	2.8	6	0.3	864	36	12	1	8.84
367.771.16.1	100	110	12.5	2.8	6	0.3	648	72	12	1	9.84
368.771.16.1	125	125	14.2	2.8	6	0.3	432	24	8	1	16.48
369.771.16.1	150	160	17.8	2.8	6	0.3	288	24	6	1	22.69



- Can be welded with Advance Welding AW-315G electrofusion machine

### Geberit HDPE electrofusion coupling with integrated thermal fuse

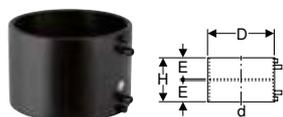

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For high-tensile, permanent connection of pipes and fittings

#### Characteristics

- With integrated thermal fuse
- Can be welded with ESG-T2 starter switch
- Heat-insulated
- UV-resistant

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PE-HD

Art. no.	DN	d, ø [mm]	D [cm]	E [cm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
370.775.16.1	200	200	22.4	7.5	15	60	5	1	183.46
371.775.16.1	250	250	27.5	7.5	15	32	4	1	262.33
372.775.16.1	300	315	34.3	7.5	15	24	3	1	342.59

#### Accessories


- Geberit accessories set for electrofusion with integrated thermal fuse → p. 174
- Geberit pressure ring → p. 174



- Can be welded with Advance Welding AW-315G electrofusion machine

## Push-in connections

### Geberit HDPE expansion socket with double flange

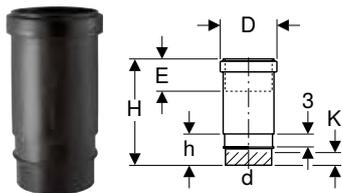

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For horizontal and vertical installation

#### Characteristics

- With seal made of EPDM
- UV-resistant

#### Technical data


Product material | PE-HD

#### Scope of delivery

- Protective cap

Art. no.	DN	d, $\varnothing$ [mm]	D [cm]	E [cm]	I [cm]	H [cm]	h [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.791.16.1	30	32	4.6	3.5-7	3	12.8	3.9	0	1920	80	10	1	9.91
360.700.16.1	40	40	5.5	6.5-13	3	23.7	6.8	3			10	1	11.85
361.700.16.1	50	50	6.7	6.5-13	3	24	6.8	3			10	1	11.85
363.700.16.1	56	56	7.4	6.5-13	3	24	6.8	3	480	120	10	1	12.00
364.700.16.1	60	63	8.3	7-13.5	3	24.3	6.8	3	320	80	10	1	14.47
365.700.16.1	70	75	9.7	7-13.5	3	24.6	6.8	3	200	50	10	1	16.04
366.700.16.1	90	90	11.3	7-13.5	3	24.9	6.9	3	160	10		1	16.18
367.700.16.1	100	110	13.6	7.5-14	3	25.6	7.3	3.5	120	30		1	16.33
368.700.16.1	125	125	15.7	8-14.5	3	26.1	7.4	3.5	80	20		1	27.00
369.700.16.1	150	160	19.5	8-14.5	3	26.8	7.4	3.5	40		5	1	48.45

### Geberit HDPE expansion socket

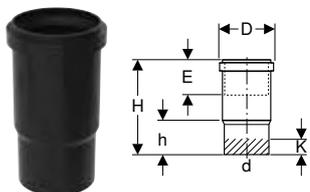

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For horizontal and vertical installation

#### Characteristics

- With seal made of EPDM
- UV-resistant


#### Technical data

Product material | PE-HD

Art. no.	DN	d, $\varnothing$ [mm]	D [cm]	E [cm]	H [cm]	h [cm]	K [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
370.700.16.1	200	200	24.3	17-23.5	43	15.6	13	20	5	1	229.32
371.700.16.1	250	250	29.1	17-23.5	42.5	17	9	17		1	308.61
372.700.16.1	300	315	36.1	17-23.5	45.8	17.5	14	10		1	591.73



## Geberit HDPE ring seal socket with lip seal



click & scan

### Application purposes

- For building drainage
- For site drainage

### Technical data

Product material	PE-HD
------------------	-------

### Characteristics


- With lip seal made of EPDM
- Welding end for connection to electrofusion sleeve coupling
- UV-resistant

### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	D [cm]	H [cm]	h [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.779.16.3	40	40	5.5	8	3.5	2.5	2400	100	10		5.78
361.779.16.3	50	50	6.5	8	3.5	2.5	1600	100	10		5.90
363.779.16.3	56	56	7	8.3	3.5	2.5	1200	150	10		7.13
364.779.16.3	60	63	7.8	8.8	3.5	2.5	960	120	10		9.27
365.779.16.3	70	75	9	9.7	3.5	2.5	560	70	10		9.34
366.779.16.3	90	90	10.6	10.3	3.6	2	400	50	10		10.36
367.779.16.3	100	110	12.9	10.5	3.7	2	280	70	10		11.32
368.779.16.3	125	125	14.7	11	3.8	2	160	40	10	1	19.53
369.779.16.3	150	160	18.5	13.6	4	2	100	25	5	1	37.89

## Geberit HDPE ring seal socket, reduced, with lip seal



click & scan

### Application purposes

- For building drainage
- For site drainage

### Technical data

Product material	PE-HD
------------------	-------

### Characteristics

- With lip seal made of EPDM
- UV-resistant


### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.752.16.3	50	56	50	6.5	5.2	0.7	2400	100	10		6.05
364.752.16.3	56	63	56	7.1	5.1	0.7	1600	200	10	1	9.27

## Adaptors to other product materials

### Geberit adaptor clamping connector

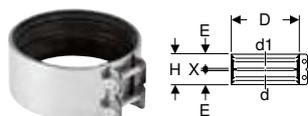

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For connecting pipes and fittings made of the same or different product materials


#### Characteristics

- With seal made of EPDM

#### Technical data

Product material		Stainless steel									
Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	E [cm]	H [cm]	X [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.424.00.2	50	48-50	48-50	6.3	2.7	5.7	0.3	50	10	1	25.70
359.426.00.2	56	56	58	7.5	2.7	5.7	0.3	50	10	1	27.44
359.427.00.2	56	56	68	8.3	2.7	5.7	0.3	50	10	1	27.44
359.428.00.2	60	63	60	7.8	2.7	5.7	0.3	50	10	1	28.34
359.429.00.2	60	63-64	63-64	7.8	2.7	5.7	0.3	50	10	1	28.34
359.430.00.2	60	63-64	68	8.3	2.7	5.7	0.3	50	10	1	28.34
359.432.00.2	70	75	68	9	2.7	5.7	0.3	50	10	1	29.29
359.433.00.2	70	75-76	75-76	8.8	2.7	5.7	0.3	50	10	1	28.70
359.434.00.2	70	75-76	78	9.3	2.7	5.7	0.3	50	10	1	29.29
359.435.00.2	70	75-76	83-84	9.8	2.7	5.7	0.3	50	10	1	28.70
359.436.00.2	70	75-76	89-90	10.3	2.7	5.7	0.3	50	10	1	29.29
359.437.00.2	90	89-90	83-84	11.1	2.7	5.7	0.3	50	10	1	30.18
359.438.00.2	90	89-90	89-90	10.3	2.7	5.7	0.3	50	10	1	30.18
359.439.00.2	90	89-90	96	11.1	3.3	6.9	0.3	50	10	1	30.18
359.440.00.2	100	108-110	106	12.5	2.7	5.7	0.3	50	10	1	31.11
359.441.00.2	100	108-110	108-110	12.5	2.7	5.7	0.3	50	10	1	31.11
359.442.00.2	100	108-110	114-116	13.1	3.3	6.9	0.3	50	10	1	31.11
359.443.00.2	125	125	125	14	2.7	5.7	0.3	30	10	1	36.57
359.444.00.2	125	125	131-135	15	3.3	6.9	0.3	30	10	1	36.57
359.445.00.2	125	125	140-141	15.6	3.3	6.9	0.3	30	10	1	36.57
359.448.00.2	150	159-160	152	17.5	3.3	6.9	0.3	20	10	1	58.56
359.449.00.2	150	159-160	159-160	17.5	3.3	6.9	0.3	20	10	1	58.56
359.450.00.2	150	159-160	168	18.3	3.3	6.9	0.3	20	10	1	58.56

### Geberit HDPE support ring

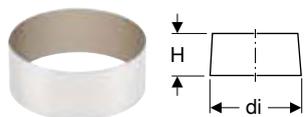

click & scan

#### Application purposes


- For building drainage
- For site drainage
- For supporting Geberit HDPE pipes and fittings when using a clamping connector or adaptor clamping connector
- For transitions from Geberit HDPE to cast iron

#### Technical data

Product material		CrNi steel 1.4301 (EN 10088)									
Art. no.	DN	d, ø [mm]	di, ø [mm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.			
359.454.00.1	50	50	44	4	50	10	1	5.43			
359.455.00.1	56	56	50	4	50	10	1	5.95			
359.456.00.1	60	63	57	4	50	10	1	7.89			
359.457.00.1	70	75	69	4	50	10	1	7.89			
359.458.00.1	90	90	83	4	50	10	1	8.31			
359.459.00.1	100	110	101.4	4	50	10	1	8.89			
359.462.00.1	125	125	115.2	4		10	1	11.77			
359.464.00.1	150	160	147.6	4		10	1	14.54			



## Geberit HDPE straight adaptor to lead



click & scan

### Application purposes

- For building drainage
- For site drainage
- For soft and hard soldering
- For transitions from Geberit HDPE to lead

### Characteristics

- Union nut made of PP
- Compression ring made of PP
- Seal made of EPDM

### Scope of delivery


- Compression joint

### Technical data

Product material	Brass
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.330.00.1	56	56	54	8.3	3.5	10	1	42.34

## Geberit HDPE straight adaptor to cast iron, with support ring

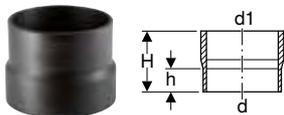

click & scan

### Application purposes

- For building drainage
- For site drainage
- For use with standard CV clamping connector

### Characteristics


- Without socket
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.268.16.1	125	125	135	10	5.1	20	1	74.35

## Geberit HDPE straight adaptor to cast

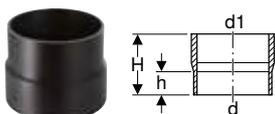

click & scan

### Application purposes

- For building drainage
- For site drainage
- For use with standard CV clamping connector

### Characteristics


- Can be used without support ring
- Without socket
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]	SU1 [pc.]	GBP/pc.
370.738.16.1	200	200	212	16	8	1	244.68
371.738.16.1	250	250	274	16	11.5	1	289.29
372.738.16.1	300	315	326	16	11.5	1	321.01

## Geberit HDPE straight adaptor to PVC



click & scan

### Application purposes

- For transitions from PVC to Geberit HDPE
- For building drainage


### Characteristics

- UV-resistant

### Technical data

Product material		PE-HD							
Art. no.	DN	d, ø [mm]	d1, ø [mm]	di, ø [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.701.16.1	30 / 30	32	36	30	7.7			1	2.95
360.722.16.1	40 / 30	40	36.5	30.5	7.7	30	5	1	2.95
360.723.16.1	40 / 40	40	43	37	7.7			1	2.95
361.728.16.1	50 / 40	50	43	37	7.7		100	1	2.95

## Geberit HDPE straight adaptor to PVC

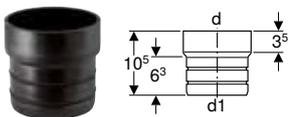

click & scan

### Application purposes

- For building drainage
- For site drainage
- For transitions from Geberit HDPE to PVC with an inner diameter of 100–101 mm


### Characteristics

- UV-resistant

### Technical data

Product material		PE-HD				
Art. no.	DN	d, ø [mm]	d1, ø [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.461.16.1	100	110	99	10	1	17.02

## Geberit HDPE straight adaptor to stoneware



click & scan

### Application purposes

- For building drainage
- For inserting in stoneware couplings
- For connecting pipe ends with stoneware connectors
- For connecting seals and clamping connectors made of stoneware
- For use inside buildings

### Characteristics


- UV-resistant

### Technical data

Product material		PE-HD					
Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]	SU1 [pc.]	GBP/pc.
367.739.16.1	110 / 100	110	132	15.2	7	1	133.81
368.739.16.1	125	125	159	15.5	7	1	165.06
369.739.16.1	150 / 150	160	186	15.5	7	1	196.94
370.739.16.1	200 / 200	200	242	20	13	1	244.68
371.739.16.1	250 / 250	250	298	20	13	1	277.44
372.739.16.1	300 / 300	315	352	20	12	1	335.98



## Geberit HDPE straight adaptor with shrink-fitted sleeve

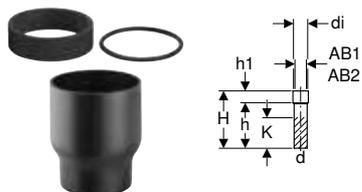

click & scan

### Application purposes

- For building drainage
- For site drainage
- For shrinking on connection pieces and pipe ends

### Characteristics

- UV-resistant

### Scope of delivery

- Compression seal made of EPDM, for connection area AB1
- Round cord ring made of EPDM, for connection area AB2

### Technical data

Product material	PE-HD
------------------	-------


Art. no.	DN	d, $\varnothing$ [mm]	AB1 [mm]	AB2 [mm]	di, $\varnothing$ [mm]	H [cm]	h [cm]	h1 [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
152.153.16.1	40	40	41-45	35-39	50	24.1	18.8	5.2	13				1	28.36
152.154.16.1	40	40	53-54	48-49	60	24.4	20.5	3.9	13				1	28.36
152.155.16.1	40	40	60-67	53-60	70	24.9	20.6	4.3	13				1	28.36
152.197.16.1	50	50	60-67	53-60	70	27.2	22.9	4.3	18				1	33.96
152.198.16.1	50	50	67-74	60-67	80	28.8	23.6	5.2	18				1	33.96
152.651.16.1	50	50	53-54	48-49	60	26.7	22.8	3.9	18			10	1	33.96
152.652.16.1	50	50	80-84	73-77	90	30.5	24.2	6.3	18				1	33.96
152.149.16.1	56	56	60-67	53-60	70	23	18.6	4.4	14				1	33.66
152.150.16.1	56	56	67-74	60-67	80	24.7	19.5	5.2	14				1	33.66
152.654.16.1	56	56	53-54		60	22.3	18.4	3.9	14				1	35.66
152.657.16.1	60	63	60-67		73	22.7	18.4	4.3	14				1	37.15
152.658.16.1	60	63	67-74		80	24.3	19.1	5.2	14				1	38.64
152.151.16.1	70	75	80-84	73-77	90	24.2	17.6	6.6	13		80	10	1	37.16
152.152.16.1	70	75	67-74		80	22.7	17.5	5.2	13				1	37.55
152.661.16.1	70	75	90-94		100	24.8	18.1	6.7	13				1	38.64
366.550.16.1	90	90	84-98		110	17	7.6	9.4	1		70	10	1	41.25
367.550.16.1	100	110	102-126	100-124	140	18	7.5	10.5	1		40	5	1	44.61
367.551.16.1	100	110	102-111	100-109	125	16.2	6.7	9.5	1		30	5	1	44.61
368.550.16.1	125	125	116-136	115-134	150	18	8	10	1		20	5	1	60.00
369.550.16.1	150	160	148-180	149-176	195	20	8.3	11.7	1	80		10	1	75.81
369.551.16.1	150	160	189-212	187-220	230	32.3	16.3	16	3				1	121.19



- Depending on the connection area, either the compression seal or the round cord ring must be used

## Screwing joints

### Geberit HDPE threaded connector

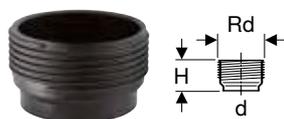

click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics


- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\varnothing$ [mm]	Rd	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.784.16.1	40	40	52x1/6	5		1	7.56
361.784.16.1	50	50	62x1/6	5	10	1	7.69
365.784.16.1	70	75	95x1/6	7.5		1	8.21
366.784.16.1	90	90	110x1/4	7.5		1	9.25
367.784.16.1	100	110	130x1/4	7.5		1	9.25

**Geberit HDPE threaded connector with compression joint**



click & scan

**Application purposes**

- For building drainage
- For site drainage

**Technical data**

Product material	PE-HD
------------------	-------

**Characteristics**


- Union nut made of PP
- Compression ring made of PP
- Seal made of EPDM
- UV-resistant

**Scope of delivery**

- Protective cap

Art. no.	DN	d, ø [mm]	Rd	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.740.16.1	30	32	44x1/8	5.6	4.5	2.6	3	1			10	1	7.95
360.740.16.1	40	40	52x1/6	6.4	6.3	3.3	5	2		50	10	1	7.95
361.740.16.1	50	50	62x1/6	7.4	6.3	3.3	5	2		100	10	1	7.95
363.740.16.1	56	56	70x1/6	8.5	6.8	3.5	5	2	1200	100	10	1	8.04
364.740.16.1	60	63	75x1/6	9	6.8	4.2	5	2			10	1	11.58
365.740.16.1	70	75	95x1/6	11.2	9.6	4.5	7.5	2.5			10	1	21.88
366.740.16.1	90	90	110x1/4	12.9	9.7	5	7.5	2.5			10	1	25.01
367.740.16.1	100	110	130x1/4	14.9	9.7	6.5	7.5	2.5			10	1	29.73

**Geberit HDPE threaded connector with compression joint, extended**



click & scan

**Application purposes**

- For building drainage

**Technical data**

Product material	PE-HD
------------------	-------

**Characteristics**


- Union nut made of PP
- Compression ring made of PP
- Seal made of EPDM
- UV-resistant

**Scope of delivery**

- Protective cap

Art. no.	DN	d, ø [mm]	Rd	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
363.931.16.1	56	56	70x1/6	8.5	9.8	3.5	8	5	10	1	20.03
365.931.16.1	70	75	95x1/6	11.2	12.8	4.5	10.7	5.7	10	1	35.00

**Geberit HDPE threaded connector with compression joint, reduced**



click & scan

**Application purposes**

- For building drainage

**Technical data**

Product material	PE-HD
------------------	-------

**Characteristics**

- Union nut made of PP
- Compression ring made of PP
- Seal made of EPDM
- UV-resistant

**Scope of delivery**

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	Rd	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
364.753.16.1	60 / 56	63	56	70x1/6	6.8	6.8	3.5	5	2	10	1	16.72



## Geberit HDPE threaded connector with screw cap



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics


- With seal made of EPDM
- Screw cap made of PP
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	Rd	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.750.16.1	30	32	44x1/8	5.6	4.5	2.6	3	1			10	1	8.51
360.750.16.1	40	40	52x1/6	6.4	6.3	3.3	5	2			10	1	8.51
361.750.16.1	50	50	62x1/6	7.4	6.3	3.3	5	2	1440	60	10	1	8.51
363.750.16.1	56	56	70x1/6	8.5	6.8	3.5	5	2		50	10	1	9.17
364.750.16.1	60	63	75x1/6	9	6.8	4.2	5	2		10	10	1	13.02
365.750.16.1	70	75	95x1/6	11.2	9.6	4.5	7.5	2.5		50	10	1	20.45
366.750.16.1	90	90	110x1/4	12.9	9.7	4.8	7.5	2.5			10	1	23.51
367.750.16.1	100	110	130x1/4	14.9	9.7	6.3	7.5	2.5	240	30	10	1	28.27

## Geberit HDPE threaded connector with screw cap, extended

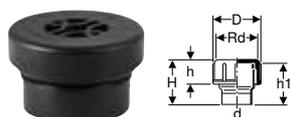

click & scan

### Application purposes

- For building drainage

### Characteristics

- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

### Scope of delivery

- Seal made of EPDM
- Screw cap made of PP

Art. no.	DN	d, $\emptyset$ [mm]	Rd	D [cm]	H [cm]	h [cm]	h1 [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
363.932.16.1	56	56	70x1/6	8.5	9.5	3.3	9.1	50	10	1	22.86
365.932.16.1	70	75	95x1/6	11.2	12.2	4.3	11.7	50	10	1	29.17
366.932.16.1	90	90	110x1/4	12.9	12.2	4.8	11.6		10	1	52.59
367.932.16.1	100	110	130x1/4	14.4	7.9	3.3	7.4	25		1	35.66

## Geberit HDPE compression joint



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Compression ring made of PP

### Technical data

Product material	PE
------------------	----

### Scope of delivery

- Union nut made of PP
- Seal made of EPDM
- Compression ring

Art. no.	DN	d, $\emptyset$ [mm]	Rd	D [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
363.749.16.1	56	56	70x1/6	8.5	6.8	10	1	9.67
364.749.16.1	60	63	75x1/6	9	6.8	10	1	15.02

## Geberit HDPE union nut



click & scan

### Application purposes

- For building drainage
- For site drainage

### Technical data

Product material	PP
------------------	----

Art. no.	DN	d, ø [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.780.16.1	30	32		1	4.90
360.780.16.1	40	40		1	4.68
361.780.16.1	50	50	10		4.68
363.780.16.1	56	56	10	1	4.75
364.780.16.1	60	63		1	4.68
365.780.16.1	70	75	10	1	4.75
366.780.16.1	90	90	10	1	9.87
367.780.16.1	100	110		1	12.28

## Geberit HDPE threaded connector with screw cap



click & scan

### Application purposes

- For building drainage
- For site drainage
- For cleaning and checking pipe sections

### Characteristics


- Round opening
- Screw cap made of PP
- With seal made of EPDM
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	Rd	D [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.471.16.1	100	110	130x1/4	14.3	4	400	50	10	1	15.41

## Geberit HDPE adaptor with male thread



click & scan

### Application purposes

- For building drainage

### Characteristics

- With support ring made of chrome nickel steel
- UV-resistant


### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.726.16.1	50	50	1 1/4	6	50	10	1	36.78
361.727.16.1	50	50	1 1/2	6		10	1	36.78
363.728.16.1	56	56	2	6.5		10	1	51.47
364.728.16.1	60	63	2	6.5	120	10	1	51.98
365.729.16.1	70	75	2 1/2	7		10	1	67.08



## Geberit HDPE adaptor with female thread



click & scan

### Application purposes

- For building drainage

### Characteristics

- With support ring made of chrome nickel steel
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.719.16.1	40	40	1/2	5.5	50	10	1	26.90
360.720.16.1	40	40	3/4	5.5	50	10	1	26.90
360.721.16.1	40	40	1	5.5	50	10	1	26.90
361.719.16.1	50	50	1/2	6	50	10	1	32.54
361.720.16.1	50	50	3/4	6	50	10	1	32.54
361.721.16.1	50	50	1	6		10	1	32.54
361.722.16.1	50	50	1 1/4	6		10	1	32.54
361.723.16.1	50	50	1 1/2	6		10	1	32.54
363.724.16.1	56	56	2	6.5		10	1	51.47
364.724.16.1	60	63	2	7		10	1	51.98
365.725.16.1	70	75	2 1/2	7		10	1	67.08

## Geberit HDPE straight adaptor with male thread and compression joint



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Compression ring made of PP
- With seal made of EPDM

### Technical data

Product material	Brass
------------------	-------

### Scope of delivery

- Protective cap
- Compression joint made of PP

Art. no.	DN	d, ø [mm]	R ["]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.309.00.1	50	50	1 1/2	6.5	2.7	10	1	36.78
359.311.00.1	56	56	2	6.5	2.7	10	1	40.04

## Geberit HDPE straight adaptor with female thread and compression joint



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Compression ring made of PP
- With seal made of EPDM

### Technical data

Product material	Brass
------------------	-------

### Scope of delivery

- Protective cap
- Compression joint made of PP

Art. no.	DN	d, ø [mm]	Rp ["]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.313.00.1	56	56	2	6	1.8	10	1	45.76

## Geberit HDPE straight adaptor with compression joint, for glueing



click & scan

### Application purposes

- For building drainage
- For site drainage

### Scope of delivery

- Compression joint made of PP

### Technical data

Product material		PVC								
Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
359.421.00.1	56 / 50	56	50	8	4	10	1	37.23		
359.423.00.1	56 / 60	56	63	7.8	4		1	37.23		

## Flange connections

### Geberit HDPE blind flange



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Plastic coated

### Technical data

Product material		Steel									
Art. no.	DN	d, $\varnothing$ [mm]	D [cm]	k [mm]	m [mm]	H [cm]	n [pc.]	PN [bar]	SU1 [pc.]	GBP/pc.	
361.748.00.1	50	50	15	110	18	1.2	4	10	1	48.14	
363.748.00.1	56 / 60	56 / 63	16.5	125	18	1.2	4	10	1	50.96	
365.748.00.1	70	75	18.5	145	18	1.2	4	10	1	55.43	
366.748.00.1	90	90	20	160	18	1.4	8	10	1	70.81	
367.748.00.1	100	110	22	180	18	1.4	8	10	1	89.15	
368.748.00.1	125	125	25	210	18	1.4	8	10	1	90.65	
369.748.00.1	150	160	28.5	240	23	1.4	8	10	1	151.47	
370.748.00.1	200	200	34	295	23	1.4	8	3.2	1	198.80	
371.748.00.1	250	250	39.5	350	23	1.6	12	3.2	1	277.76	
372.748.00.1	300	315	44.5	400	23	2	12	3.2	1	529.47	

### To order additionally

- Geberit HDPE flange gasket → p. 62

### Geberit HDPE loose flange



click & scan

### Application purposes

- For building drainage
- For site drainage
- For combining with Geberit HDPE flange adaptor

### Characteristics

- Plastic coated

### Technical data

Product material		Steel									
------------------	--	-------	--	--	--	--	--	--	--	--	--




Art. no.	DN	d, ø [mm]	D [cm]	k [mm]	m [mm]	H [cm]	n [pc.]	PN [bar]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
361.745.00.1	50	50	15	110	18	1.2	4	10		1	28.27
363.745.00.1	56 / 60	56 / 63	16.5	125	18	1.2	4	10		1	29.73
365.745.00.1	70	75	18.5	145	18	1.2	4	10		1	35.66
366.745.00.1	90	90	20	160	18	1.4	8	10		1	42.52
367.745.00.1	100	110	22	180	18	1.4	8	10		1	47.55
368.745.00.1	125	125	25	210	18	1.4	8	10		1	56.52
369.745.00.1	150	160	28	240	23	1.4	8	10		1	83.24
370.745.00.1	200	200	34	295	23	1.4	8	3.2		1	118.90
371.745.00.1	250	250	39.5	350	23	1.6	12	3.2		1	178.39
372.745.00.1	300	315	44.5	400	23	2	12	3.2	40	1	252.71

**To order additionally**

- Geberit HDPE flange gasket → p. 62

**Geberit HDPE flange adaptor**



click & scan

**Application purposes**


- For building drainage
- For site drainage
- For combining with Geberit HDPE loose flanges

**Technical data**

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	D [cm]	D1 [cm]	H [cm]	h [cm]	h1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.744.16.1	50	50	8	5.4	6	4.2	0.8		50	10	1	19.83
363.744.16.1	56	56	9	6.8	6	3.6	0.8			10	1	21.47
364.744.16.1	60	63	9	6.8	6	3.7	0.8			10	1	26.01
365.744.16.1	70	75	11	7.8	6.5	4	0.9			10	1	29.17
366.744.16.1	90	90	12.8	9.6	7	4.4	1.1			10	1	30.95
367.744.16.1	100	110	14.8	11.6	7.5	4.8	1.2			10	1	32.72
368.744.16.1	125	125	16	13.1	8	5	1.4				1	45.02
369.744.16.1	150	160	19.8	16.5	9	5.1	1.7				1	60.58
370.744.16.1	200	200	26	20.6	7.8	5.4	1.4				1	107.00
371.744.16.1	250	250	32.5	25.6	7.8	5.2	1.6				1	200.60
372.744.16.1	300	315	37	31.5	10	7	2	50			1	342.59

**Geberit HDPE bolt set**



click & scan

**Application purposes**

- For building drainage
- For site drainage

**Characteristics**

- Zinc-plated

**Scope of delivery**

- Bolt
- 2 washers
- Nut


**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	d, ø [mm]	M [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.743.26.1	galvanized	50-75	16	7			1	7.95
366.743.26.1	galvanized	90-125	16	8	50		1	7.94
369.743.26.1	galvanized	160-200	20	9			1	10.41
371.743.26.1	galvanized	250	20	10			1	13.42
372.743.26.1	galvanized	315	20	11		20	1	13.42

## Flange bushings

### Geberit HDPE flange bushing

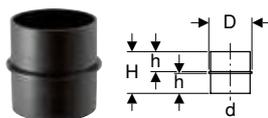

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics

- UV-resistant

#### Technical data


Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	D [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.772.16.1	30	32	3.8	5.2	2.4		10	1	3.95
360.772.16.1	40	40	4.7	6.8	3.2		10	1	4.30
361.772.16.1	50	50	5.7	6.8	3.2		10	1	4.54
363.772.16.1	56	56	6.5	5.8	2.7	50	10	1	4.90
364.772.16.1	60	63	7	7.2	3.4		10	1	5.80
365.772.16.1	70	75	9	7.2	3.4		10	1	7.03
366.772.16.1	90	90	10.3	9.2	4.4		10	1	8.44
367.772.16.1	100	110	12	11.7	5.6		10	1	11.92

## Waste Fittings

### Connection bends

#### Geberit HDPE connection bend 45° with connection ring seal socket for wall-hung WC

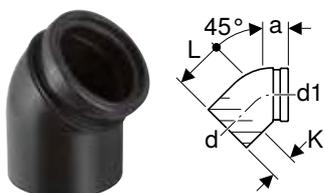

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances with horizontal outlet

#### Characteristics

- With seal made of EPDM
- UV-resistant

#### Scope of delivery

- Protective cap

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	a [cm]	L [cm]	K [cm]	SU1 [pc.]	GBP/pc.
367.945.16.1	100 / 90	110	90	45	6	8.7	3	1	41.38



## Geberit HDPE connection bend 88.5° for floor-standing WC



click & scan

### Application purposes

- For building drainage
- For site drainage
- For sanitary appliances with vertical outlet

### Characteristics

- UV-resistant

### Scope of delivery

- Protective cap

### Technical data


Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	arc [°]	di, ø [mm]	D [cm]	H [cm]	X1 [cm]	X2 [cm]	K [cm]	SU1 [pc.]	GBP/pc.
367.880.16.1	100	110	88.5	120	13.2	12	30	6	22	1	33.69

### To order additionally

- Sleeve

## Geberit HDPE connection bend 88.5° with lateral supplementary connections for floor-standing WC

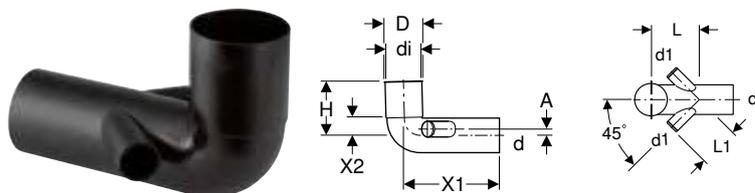

click & scan

### Application purposes

- For building drainage
- For site drainage
- For sanitary appliances with vertical outlet

### Characteristics


- Lateral connections raised and closed
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	di, ø [mm]	D [cm]	L [cm]	L1 [cm]	H [cm]	X1 [cm]	X2 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
366.888.16.1	90 / 50	90	50	88.5	2	110	11.6	17.5	14	16	30	5		5	1	37.16
367.888.16.1	100 / 50	110	50	88.5	2	110	11.6	17.5	14	17	30	6	60	5	1	30.64

## Geberit HDPE connection bend 90° for sleeve

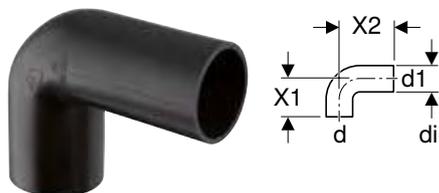

click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- Long leg
- UV-resistant

### Technical data


Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	di, ø [mm]	X1 [cm]	X2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.080.16.1	50	50	50	90	44	7.5	10	800	50	10	1	5.78
363.083.16.1	56	56	50	90	44	7.5	10	600	50	10	1	5.36
364.084.16.1	56	56	63	90	57	7.5	20		50	10	1	16.62

### To order additionally

- Sleeve

### Geberit HDPE connection bend 90° for sleeve

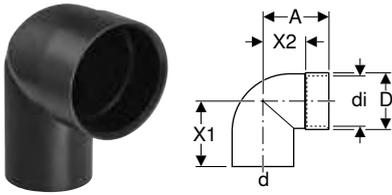

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics

- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------

#### Scope of delivery


- Protective cap

Art. no.	DN	d, ø [mm]	arc [°]	A [cm]	di, ø [mm]	D [cm]	X1 [cm]	X2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.061.16.1	40	40	90	5	46	5.2	6	3	1600	100	10	1	3.57
361.065.16.1	50	50	90	6	58	6.4	7	4			10	1	3.57
363.061.16.1	56	56	90	6	46	5.2	6	4	1400	350	10	1	2.97

#### To order additionally

- Sleeve

### Geberit HDPE connection bend 90° for wall-hung WC

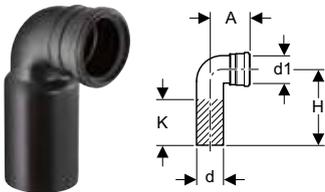

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances with horizontal outlet
- For vertical installation

#### Characteristics

- With seal made of EPDM
- UV-resistant

#### Technical data


Product material	PE-HD
------------------	-------

#### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	H [cm]	K [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
366.061.16.1	90 / 90	90	90	90	11	22.5	13	120	10	1	32.17
367.070.16.1	100 / 90	110	90	90	12.1	22.5	13	80	10	1	32.52

### Geberit HDPE DN connection bend 90° for wall-hung WC, with extension

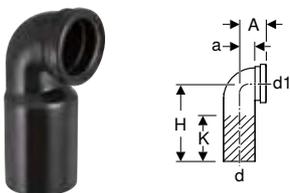

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances with horizontal outlet
- For vertical installation

#### Characteristics

- With seal made of EPDM
- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------


#### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	H [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.792.16.1	100 / 100	110	110	90	7.5	4.5	22.5	13	100	25	5	1	36.44
367.925.16.1	100 / 90	110	90	90	7.5	4.5	22.5	13	100	25		1	36.42



## Geberit HDPE connection bend 90° with leakage indicator connection for wall-hung WC

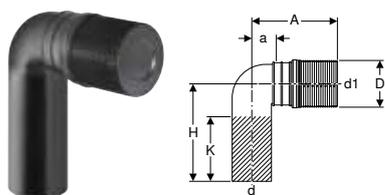

click & scan

### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances with horizontal outlet
- For displaying leaking water from push-fit connections

### Characteristics


- Carries leaking water through installation wall for visible detection
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	D [cm]	H [cm]	K [cm]	SU1 [pc.]	GBP/pc.
367.997.16.1	90 / 90	90	90	90	19.7	11	10.8	22.5	13	1	37.64

## Geberit HDPE connection bend 90° with lip seal, extended, for wall-hung WC

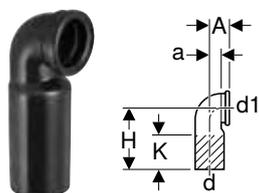

click & scan

### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances with horizontal outlet
- For Geberit Duofix frames for wall-hung WC

### Characteristics


- With seal made of EPDM
- UV-resistant

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	H [cm]	K [cm]	SU1 [pc.]	GBP/pc.
241.899.00.1	90 / 90	90	90	90	6.5	3.3	41.3	32	1	44.14

## Geberit HDPE double connection bend 90° for wall-hung WC

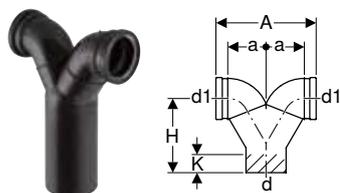

click & scan

### Application purposes

- For building drainage
- For site drainage
- For vertical installation
- For connecting sanitary appliances with horizontal outlet
- For Geberit Duofix frames for wall-hung WC
- For Geberit GIS elements for wall-hung WC

### Characteristics

- With seal made of EPDM
- UV-resistant

### Scope of delivery


- 2 protective caps

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.903.16.1	100 / 100 / 100	110	110	90	28.5	11	20.5	5		1	99.76
367.923.16.1	100 / 90 / 90	110	90	90	27.5	10.5	32.5	19	5	1	148.62

## Geberit HDPE double connection bend 90°, offset, for wall-hung WC

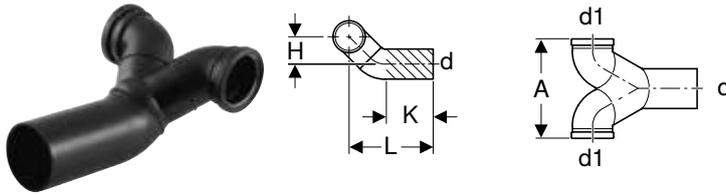

click & scan

### Application purposes

- For Geberit Duofix frames for wall-hung WC
- For Geberit GIS elements for wall-hung WC
- For horizontal installation
- For connecting sanitary appliances with horizontal outlet
- For building drainage

### Characteristics

- With seal made of EPDM
- UV-resistant


### Scope of delivery

- 2 protective caps

### Technical data

Product material		PE-HD										
Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	L [cm]	H [cm]	K [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.485.16.1	100 / 90 / 90	110	90	90	27.5	10.5	34	10	12	10	1	148.62
367.904.16.1	100 / 100 / 100	110	110	90	28.5	11	34	10	12		1	148.62

## Geberit HDPE connector adaptor

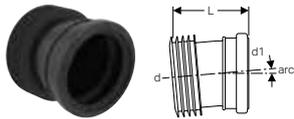


click & scan

### Technical data

Product material		PE-HD									
Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	L [cm]	SU1 [pc.]	GBP/pc.				
366.041.16.1	90	90	90	5	10.5	1	47.57				
366.042.16.1	90	90	90	9	10.9	1	47.57				
366.043.16.1	90	90	90	14	11.5	1	47.57				
366.044.16.1	90	90	90	18	11.5	1	47.57				
366.046.16.1	90	90	90	24	12.3	1	47.57				
366.047.16.1	90	90	90	29	13.3	1	47.57				
366.048.16.1	90	90	90	34	13.7	1	47.57				

## Coupling sockets

### Geberit HDPE coupling socket



click & scan

### Application purposes

- For building drainage
- For site drainage
- For sleeves

### Characteristics

- UV-resistant

### Scope of delivery

- Protective cap

### Technical data

Product material		PE-HD									
Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	L [cm]	I [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
363.774.16.1	56	56	58	6.4	3.5	1	10	1	8.50		



## Geberit HDPE coupling socket for floor-standing WC



[click & scan](#)

### Application purposes

- For building drainage
- For site drainage
- For sanitary appliances with vertical outlet
- For sleeves

### Characteristics

- UV-resistant

### Scope of delivery

- Protective cap

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	di, $\emptyset$ [mm]	D [cm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
366.898.16.1	90	90	120	13.2	7	2	10	1	15.25
367.898.16.1	100	110	120	13.2	7	2	10	1	15.25

### To order additionally

- Sleeve

## Geberit HDPE connection ring seal socket with lip seal



[click & scan](#)

### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances

### Characteristics

- With lip seal made of EPDM
- UV-resistant

### Scope of delivery

- Protective cap

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	D [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.768.16.3	30	32	4.4	4.8	0.8	100	10	1	7.08

## Geberit HDPE connection ring seal socket with lip seal for wall-hung WC



[click & scan](#)

### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances with horizontal outlet

### Characteristics

- With seal made of EPDM
- UV-resistant

### Scope of delivery

- Protective cap


### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	D [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
367.794.16.1	100 / 100	110	110	13.1	4.1	10	1	16.84

## Straight connectors

### Geberit HDPE straight connector with ring seal socket for wall-hung WC



click & scan

#### Application purposes

- For building drainage
- For site drainage
- For connecting sanitary appliances with horizontal outlet
- For Geberit Duofix frames for wall-hung WC
- For Geberit GIS elements for wall-hung WC

#### Characteristics

- With seal made of EPDM
- UV-resistant

#### Scope of delivery

- Protective cap


#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	D [cm]	L [cm]	l [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
366.887.16.1	90/90	90	90	11.2	31	27.5	24	140	35	1	31.75
367.887.16.1	100/90	110	90	11.2	34.5	31.5	28	120	30	1	32.52

## P-traps

### Geberit HDPE P-trap

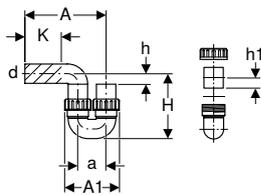

click & scan

#### Application purposes

- For building drainage
- For site drainage

#### Characteristics

- Horizontal outlet
- Inlet vertical
- Lengthways locked
- Union nut made of PP
- With seal made of EPDM
- UV-resistant

#### Technical data

Depth of water seal (mm)	$\geq 70$ mm
--------------------------	--------------


Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\varnothing$ [mm]	Discharge rate [l/s]	A [cm]	A1 [cm]	a [cm]	H [cm]	h [cm]	h1 [cm]	K [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
364.730.16.1	60	63	1.4	30.5	18.5	9.5	20.5	5	3.4	16	120	10	1	59.23
365.730.16.1	70	75	2.4	34.5	25	13.5	29.5	7	3.4	14	60	5	1	92.79
366.730.16.1	90	90	3.6	41	27	14	27	5	5.6	20	40	5	1	134.42
367.730.16.1	100	110	5.9	46	31	16	31.5	6	5.6	22	32	4	1	148.62



## Suction traps

### Geberit HDPE suction trap with service opening

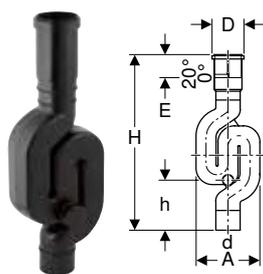

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For use in frost-proof areas

#### Technical data

Depth of water seal (mm)	70 mm
Product material	PE-HD

#### Characteristics

- With expansion socket
- With service opening 50 mm
- Horizontal outlet
- Screw cap made of PP
- With seal made of EPDM
- UV-resistant

#### Scope of delivery


- Protective cap

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	G ["]	A [cm]	D [cm]	E [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
365.813.16.1	70	75	3.8	2 1/2	19.8	9.8	8-10.5	66.7	16.6	40	10	1	103.59
367.813.16.1	100	110	9.6	4	28.8	13.6	8-10.5	80.8	21.7	20	5	1	163.50

## Accessories

### Pipe brackets

#### Geberit pipe bracket with threaded socket G 1/2", adjustable

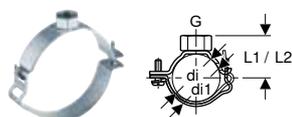

click & scan

#### Application purposes

- For building drainage
- For fastening to threaded pipes
- For fastening pipes to ceilings and walls
- For anchor-point fastening of pipes in combination with electrofusion tapes
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets

#### Characteristics

- Adjustable
- Operable with one hand
- Female thread
- Zinc-plated

#### Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	G ["]	di, ø [mm]	di1, ø [mm]	L1 [cm]	L2 [cm]	B [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.841.00.2	galvanized	40	1/2	40	48	3.8	4.2	3		50	10	1	6.90
361.841.00.2	galvanized	50	1/2	50	58	4.3	4.7	3	2250	50	10	1	7.23
363.841.00.2	galvanized	56	1/2	56	64	4.6	5	3	2250	50	10	1	7.52
364.841.00.2	galvanized	60	1/2	63	71	5	5.4	3	2250	50	10	1	7.79
365.841.00.2	galvanized	70	1/2	75	83	5.6	6	3	1800	50	10	1	8.12
366.841.00.2	galvanized	90	1/2	90	98	6.3	6.7	3	1200	50	10	1	8.42
367.841.00.2	galvanized	100	1/2	110	118	7.3	7.7	3	1200	50	10	1	8.70
368.841.00.2	galvanized	125	1/2	125	133	8.1	8.5	3	700	25	5	1	9.00
369.841.00.2	galvanized	150	1/2	160	168	9.8	10.2	3	600	25	5	1	10.50

## Geberit pipe bracket with threaded socket M10, adjustable



click & scan

### Application purposes

- For fastening with threaded rods
- For fastening pipes to ceilings and walls
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets

### Characteristics

- Adjustable
- Operable with one hand
- Female thread
- Zinc-plated


### Technical data

Product material		Steel												
Art. no.	Colour / surface	DN	M [mm]	di, ø [mm]	di1, ø [mm]	L1 [cm]	L2 [cm]	B [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
360.843.00.2	galvanized	40	10	40	48	3.5	3.9	3	1400	50	10		6.01	
361.843.00.2	galvanized	50	10	50	58	4	4.4	3	1200	50	10	1	6.01	
363.843.00.2	galvanized	56	10	56	64	4.3	4.7	3	1400	50	10	1	6.31	
364.843.00.2	galvanized	60	10	63	71	4.7	5.1	3	1400	50	10	1	6.31	
365.843.00.2	galvanized	70	10	75	83	5.3	5.7	3	1200	50	10	1	6.59	
366.843.00.2	galvanized	90	10	90	98	6	6.4	3	800	50	10	1	7.23	
367.843.00.2	galvanized	100	10	110	118	7	7.4	3	800	50	10	1	7.52	
368.843.00.2	galvanized	125	10	125	133	7.8	8.2	3	800	25	5	1	8.42	
369.843.00.2	galvanized	150	10	160	168	9.5	9.9	3	300	25	5	1	9.00	



- Not suitable for use as an anchor point

## Geberit pipe bracket with threaded socket G 3/4", adjustable

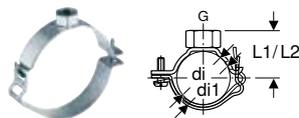

click & scan

### Application purposes

- For building drainage
- For fastening to threaded pipes
- For fastening pipes to ceilings and walls
- For anchor-point fastening of pipes in combination with electrofusion tapes
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets

### Characteristics


- Adjustable
- Operable with one hand
- Female thread
- Zinc-plated

### Technical data

Product material		Steel												
Art. no.	Colour / surface	DN	G ["]	di, ø [mm]	di1, ø [mm]	L1 [cm]	L2 [cm]	B [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
360.842.00.1	galvanized	40	3/4	40	48	4	4.4	3	50	10	1	6.68		
361.842.00.1	galvanized	50	3/4	50	58	4.5	4.9	3	50	10	1	7.42		
363.842.00.1	galvanized	56	3/4	56	64	4.8	5.2	3	50	10	1	10.36		
364.842.00.1	galvanized	60	3/4	63	71	5.2	5.6	3	50	10	1	10.44		
365.842.00.1	galvanized	70	3/4	75	83	5.8	6.2	3	50	10	1	10.55		
366.842.00.1	galvanized	90	3/4	90	98	6.5	6.9	3	50	10	1	10.78		
367.842.00.1	galvanized	100	3/4	110	118	7.5	7.9	3	50	10	1	10.94		
368.842.00.1	galvanized	125	3/4	125	133	8.3	8.7	3	25	5	1	13.20		
369.842.00.1	galvanized	150	3/4	160	168	10	10.4	3	25	5	1	14.21		



## Geberit pipe bracket with threaded socket G 1"

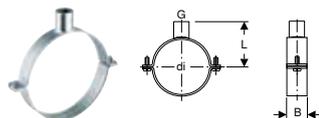

[click & scan](#)

### Application purposes

- For fastening to threaded pipes
- For fastening pipes to ceilings and walls
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets
- For anchor-point fastening of pipes in combination with double-flange bushings

### Characteristics

- Female thread
- Zinc-plated


### Technical data

Product material		Steel									
Art. no.	Colour / surface	DN	G ["]	di, ø [mm]	L [cm]	B [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.		
370.840.00.1	galvanized	200	1	200	14.8	4	13	1	33.02		
371.840.00.1	galvanized	250	1	250	17.3	4	10	1	33.02		
372.840.00.1	galvanized	300	1	315	20.5	4	7	1	39.00		

### Accessories

- Geberit plastic insert strip for pipe bracket → p. 50

## Geberit pipe bracket with threaded socket G 1 1/4"

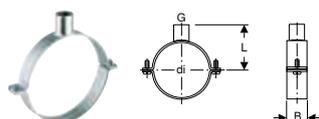

[click & scan](#)

### Application purposes

- For fastening to threaded pipes
- For fastening pipes to ceilings and walls
- For sliding bracket fastening of pipes in connection with plastic insert strips for pipe brackets
- For anchor-point fastening of pipes in combination with double-flange bushings

### Characteristics

- Female thread
- Zinc-plated


### Technical data

Product material		Steel									
Art. no.	Colour / surface	DN	G ["]	di, ø [mm]	L [cm]	B [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
370.841.00.1	galvanized	200	1 1/4	200	15.8	4	13		1	22.24	
371.841.00.1	galvanized	250	1 1/4	250	17.3	4		10	1	23.42	
372.841.00.1	galvanized	300	1 1/4	315	20.5	4		7	1	28.62	

### Accessories

- Geberit plastic insert strip for pipe bracket → p. 50

**Geberit pipe bracket with forked legs**



click & scan

**Application purposes**

- For fastening pipes to formwork
- For building drainage

**Characteristics**

- Forked legs, punched
- Zinc-plated


**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	di, ø [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.856.00.1	galvanized	50	50	50	1	5.23
363.856.00.1	galvanized	56	56	50	1	5.04
365.856.00.1	galvanized	70	75	50	1	5.04
367.856.00.1	galvanized	100	110	50	1	5.04

**Fastenings for pipe brackets**

**Geberit HDPE double-flange bushing**



click & scan

**Application purposes**


- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets

**Technical data**

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	D [cm]	H [cm]	h [cm]	h1 [cm]	h2 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
370.751.16.1	200	200	21.3	19.1	4.1	6	1.5	60	5	1	137.59
371.751.16.1	250	250	26.2	20.1	4.1	6	2	32	4	1	185.16
372.751.16.1	300	315	32.6	20.1	4.1	6	2			1	249.16

**Geberit plastic insert strip for pipe bracket**

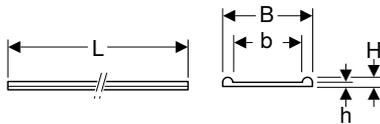

click & scan

**Application purposes**

- For building drainage
- For sliding bracket fastening of pipes in connection with pipe brackets


**Technical data**

Product material	PE-LD
------------------	-------

Art. no.	DN	d, ø [mm]	L [m]	B [cm]	b [cm]	H [cm]	h [cm]	SU4 [m]	SU3 [m]	SU2 [m]	GBP/m
362.846.00.1	40-150	40-160	10	3.8	3.1	0.4	0.2		100	10	1.89
370.846.00.1	200-300	200-315	10	4.8	4.1	0.4	0.2	1800	100	10	3.12



## Geberit electrofusion tape for anchor point

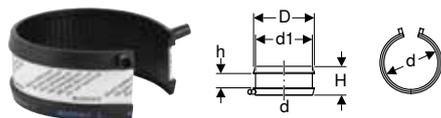

[click & scan](#)

### Application purposes

- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets

### Characteristics


- One-piece
- Can be welded with Geberit electrofusion tools

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.776.16.1	50	50	58	6.6	6	3	1800	40	10	1	15.41
363.776.16.1	56	56	64	7.2	6	3	1800	40	10	1	15.41
364.776.16.1	60	63	71	7.9	6	3	1620	60	15	1	15.41
365.776.16.1	70	75	83	9.1	6	3	1080	40	10	1	16.36
366.776.16.1	90	90	98	10.6	6	3	864	32	8	1	20.30
367.776.16.1	100	110	118	12.6	6	3	648	36	12	1	20.52
368.776.16.1	125	125	133	14.1	6	3	432	24	8	1	27.21
369.776.16.1	150	160	168	17.6	6	3	288	24	8	1	30.95
370.776.16.1	200	200	208	21.6	6	3	700	10		1	38.88
371.776.16.1	250	250	258	26.6	6	3	500		5	1	49.94

## Geberit electrofusion tape set for anchor point

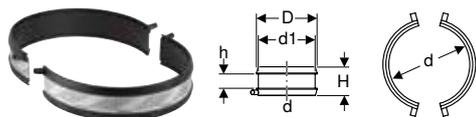

[click & scan](#)

### Application purposes

- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets

### Characteristics

- Two-piece
- Can be welded with Geberit electrofusion tools

### Scope of delivery


- Set of 2 pieces

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
372.776.16.1	300	315	323	33.1	6	3	144	12	4	1	72.52

## Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"

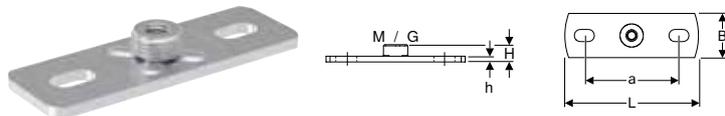

[click & scan](#)

### Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

### Characteristics


- Male thread
- Female thread
- Zinc-plated
- Two fastening points

### Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	4.20

**Geberit base plate, rectangular, two-hole, with threaded socket M10**



click & scan

**Application purposes**

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

**Characteristics**


- Female thread
- Zinc-plated
- Two fastening points

**Technical data**

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	c [mm]	L [cm]	B [cm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.837.00.1	10	7.9	19	12	4	1.5	0.4	25	1	13.97

**Geberit base plate, rectangular, two-hole, with threaded socket M8 / M10**



click & scan

**Application purposes**

- For fastening pipe brackets to the building structure
- For fastening support rails to the building structure
- For sliding bracket fastening of pipes

**Characteristics**


- Female thread
- Zinc-plated
- Two fastening points

**Technical data**

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.848.26.1	8 / 10	5.4	8	3	1.9	0.3	50	1	4.68

**Geberit base plate, rectangular, two-hole, with threaded socket G**

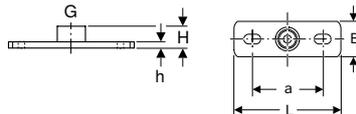

click & scan

**Application purposes**

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

**Characteristics**

- Female thread
- Zinc-plated
- Two fastening points


**Technical data**

Product material	Steel
------------------	-------

Art. no.	G ["]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.826.26.1	1/2	9	12	4	2.1	0.6	2500	25	1	7.05
362.828.26.1	1	9	12	4	2.6	0.6	1000	25	1	9.16
362.868.26.1	1 1/4	11	16	6.5	3	0.8	25	1	21.32	
362.869.26.1	1 1/2	11	16	6.5	3	0.8	25	1	23.10	



## Geberit base plate, square, four-hole, with threaded socket G

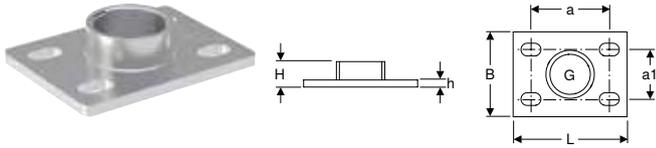

click & scan

### Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

### Characteristics


- Female thread
- Zinc-plated
- Four fastening points

### Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	a [cm]	a1 [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.874.26.1	galvanized	2	11	7	16	12	3.6	1	10	1	38.52

## Geberit base plate, round, three-hole, with threaded socket M10

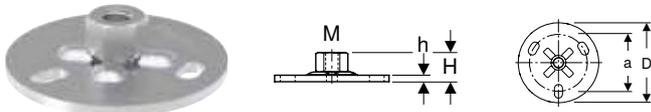

click & scan

### Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For fastening support rails to the building structure

### Characteristics


- Female thread
- Zinc-plated
- Three fastening points

### Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	a [cm]	D [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.837.26.1	10	5	7	1.6	0.4	3000	50	1	5.42

## Geberit base plate, round, three-hole, with threaded socket G 1/2"

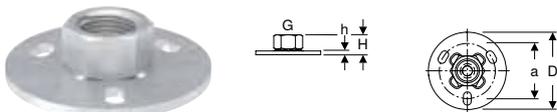

click & scan

### Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings
- For fastening pipes to ceilings and walls

### Characteristics

- Female thread
- Zinc-plated
- Three fastening points

### Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	a [cm]	D [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.839.26.1	1/2	5	7	1.9	0.4	3000	50	1	5.70

**Geberit threaded rod**



click & scan

**Application purposes**

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

**Characteristics**

- Zinc-plated

**Scope of delivery**


- Protective shell

**Technical data**

Product material	Steel
------------------	-------

Art. no.	M [mm]	L [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.836.00.1	10	50	2000	10	1	6.56

**Geberit threaded rod**



click & scan

**Application purposes**


- For building drainage
- For fastening Geberit pipe brackets to base plates
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

**Characteristics**

- Zinc-plated

Art. no.	Colour / surface	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.834.26.1	galvanized	10	200	25	1	17.43

**Geberit threaded pipe**



click & scan

**Application purposes**

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

**Characteristics**


- Female thread continuously threaded
- Zinc-plated

**Technical data**

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	115	2	1	37.51

**Geberit threaded pipe**



click & scan

**Application purposes**

- For building drainage
- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

**Characteristics**

- Male thread
- Zinc-plated

Art. no.	Colour / surface	G ["]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.852.26.1	galvanized	1/2	200	4	1	61.91
362.853.26.1	galvanized	3/4	200	2	1	115.90



Art. no.	Colour / surface	G ["]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.854.26.1	galvanized	1	200	2	1	305.06
362.855.26.1	galvanized	1 1/4	200		1	266.59
362.858.26.1	galvanized	1 1/2	200		1	399.89
362.859.26.1	galvanized	2	200		1	533.17

## Geberit threaded sleeve



click & scan

### Application purposes


- For connecting threaded rods and threaded pipes

### Characteristics

- Female thread
- Zinc-plated

Art. no.	Colour / surface	G ["]	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.843.26.1	galvanized		10	3	50	1	3.29
362.844.26.1	galvanized	1/2		3.4	50	1	7.03

## Geberit adaptor

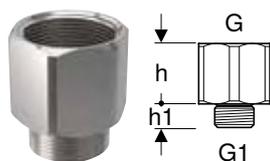

click & scan

### Application purposes


- For connecting Geberit pipe brackets and threaded pipes

### Characteristics

- Zinc-plated

Art. no.	Colour / surface	G ["]	G1 ["]	H [cm]	h [cm]	h1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.875.26.1	galvanized	1	3/4	5.2	3.6	1.6	10	1	27.25
362.876.26.1	galvanized	1 1/4	3/4	5.7	4.1	1.6	10	1	28.44
362.877.26.1	galvanized	1 1/2	3/4	7.6	5.6	2	10	1	34.05
362.878.26.1	galvanized	2	3/4	7.2	5.6	1.6	10	1	42.64
362.879.26.1	galvanized	1 1/2	1 1/4	6.6	4.6	2	10	1	40.87
362.880.26.1	galvanized	2	1 1/4	7.6	5.6	2	10	1	42.64

## Geberit hanging support



click & scan

### Application purposes

- For fastening pipes to formwork
- For building drainage

### Characteristics

- Male thread

### Technical data

Product material	Zinc-plated steel
------------------	-------------------

Art. no.	M [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.835.00.1	10	16	25	1	4.06

## Geberit hanger bolt




click & scan

### Application purposes

- For fastening Geberit pipe brackets with coupling M10 to wood constructions
- For building drainage

Art. no.	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.833.00.1	10	25	1	2.87

## Geberit reduction nipple




click & scan

### Application purposes

- For building drainage

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.842.26.1	galvanized	1/2	10	2	50	1	4.20

## Geberit double nipple M10 / G 1/2"



click & scan

### Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

### Characteristics

- Reduced
- Zinc-plated


### Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	G ["]	M [mm]	H [cm]	SW [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.856.26.1	galvanized	1/2	10	2.8	22	10	1	2.90

## Support shells

### Geberit support shell, zinc-plated and coated

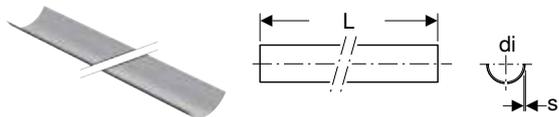

click & scan

### Application purposes

- For stabilising Geberit fastening systems

### Characteristics

- Coated
- Steel, black coated exterior
- Zinc-plated

### Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	di, $\varnothing$ [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
360.850.00.1	coated	40	40	0.75	3	30	3	11.99
361.850.00.1	coated	50	50	0.75	3	30	3	13.42
363.850.00.1	coated	56	56	0.75	3	30	3	15.68
364.850.00.1	coated	60	63	0.75	3	30	3	18.09
365.850.00.1	coated	70	75	0.75	3	30	3	18.27



Art. no.	Colour / surface	DN	di, $\emptyset$ [mm]	s [mm]	L [m]	SU3 [m]	SU2 [m]	GBP/m
366.850.00.1	coated	90	90	0.75	3	30	3	19.30
367.850.00.1	coated	100	110	0.75	3	30	3	22.53
368.850.00.1	coated	125	125	0.75	3	30	3	25.77

## Sealings

### Geberit HDPE weld-on cap



click & scan

#### Application purposes

- For building drainage
- For site drainage
- For butt welding

#### Characteristics

- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.812.16.1	30	32		10	1	2.83
360.812.16.1	40	40		10	1	2.97
361.812.16.1	50	50	50	10	1	2.97
363.812.16.1	56	56	100	10	1	2.98
364.812.16.1	60	63	100	10	1	3.03
365.812.16.1	70	75	50	10	1	3.05
366.812.16.1	90	90		10	1	3.99
367.812.16.1	100	110	50	10	1	4.49
368.812.16.1	125	125		10	1	5.70
369.812.16.1	150	160		10	1	15.15
370.812.16.1	200	200			1	29.68

### Geberit HDPE end cap, extended



click & scan

#### Application purposes

- For building drainage
- For site drainage
- For welding or insertion

#### Characteristics


- UV-resistant

#### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.929.16.1	50	50	4	25		1	14.18
363.929.16.1	56	56	4	25		1	14.32
365.929.16.1	70	75	4.4		10	1	14.81
366.929.16.1	90	90	4.5		10	1	16.18
367.929.16.1	100	110	4.6	50	10	1	17.85
369.929.16.1	150	160	6.5		10	1	42.43

## Geberit HDPE protective cap for pipe end

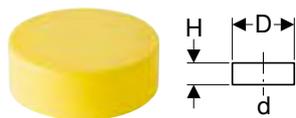

click & scan

### Application purposes

- For building drainage
- For protecting pipe ends

### Technical data

Product material	PE-LD
------------------	-------

Art. no.	Colour / surface	DN	d, ø [mm]	D [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.802.92.1	yellow	40	40	4.2	3.5			10	1	2.00
361.802.92.1	yellow	50	50	5.2	3.5		50	10	1	2.00
363.802.92.1	yellow	56	56	5.8	3.5	2400	100	10	1	2.04
364.802.92.1	yellow	60	63	6.5	3.5		100	10	1	2.15
365.802.92.1	yellow	70	75	7.8	3.5		100	10	1	2.18
366.802.92.1	yellow	90	90	9.3	3.5		100	10	1	2.22
367.802.92.1	yellow	100	110	11.3	4	800	100	10	1	2.54
368.802.92.1	yellow	125	125	12.9	4			10	1	3.34
369.802.92.1	yellow	150	160	16.4	3			10	1	7.01

## Geberit HDPE screw cap



click & scan

### Application purposes

- For building drainage
- For site drainage

### Characteristics

- With seal made of EPDM

### Technical data

Product material	PP
------------------	----

Art. no.	DN	d, ø [mm]	Rd	D [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
379.781.16.1	30	32	44x1/8	5.6	2.6				10	1	8.51
360.781.16.1	40	40	52x1/6	6.4	3.3				10	1	7.62
362.781.16.1	50	48	60x1/8	7.5	3.2				10	1	4.65
361.781.16.1	50	50	62x1/6	7.4	3.3				10	1	7.37
363.781.16.1	56	56	70x1/6	8.5	3.5				10	1	8.57
364.781.16.1	60	63	75x1/6	9	4.2				10	1	11.58
365.781.16.1	70	75	95x1/6	11.2	4.5				10	1	15.41
366.781.16.1	90	90	110x1/4	12.9	5				10	1	20.31
367.781.16.1	100	110	130x1/4	14.9	6.5	320	80	10	1	23.20	

## Geberit PE screw cap for access pipe



click & scan

### Application purposes

- For building drainage
- For site drainage
- For Geberit access pipes 90° with round service opening

### Characteristics

- With seal made of EPDM

### Technical data

Product material	PP
------------------	----

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
240.332.00.1	75	1	25.70
240.331.00.1	90	1	41.75



## Geberit PE screw cap for access pipe



[click & scan](#)

### Application purposes

- For building drainage
- For site drainage
- For Geberit HDPE access pipes 45°

### Characteristics

- With seal made of EPDM

### Technical data

Product material	PP
------------------	----

Art. no.	DN	d, ø [mm]	SU1 [pc.]	GBP/pc.
367.809.16.1	125–150	125–160	1	18.44

## Geberit PE screw cap for access pipe



[click & scan](#)

### Application purposes

- For building drainage
- For site drainage
- For Geberit HDPE access pipes 90°, ø 110–160 mm

### Characteristics

- With seal made of EPDM

### Technical data

Product material	PP
------------------	----

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
367.810.16.1	110	1	27.62

## Seals

### Geberit HDPE round cord ring



[click & scan](#)

### Application purposes

- For building drainage
- For Geberit HDPE ring seal sockets

### Technical data

Product material	EPDM
------------------	------

Art. no.	Colour / surface	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.790.00.1	black	30	32		5	1	2.81
360.789.00.1	black	40	40		5		3.10
362.769.00.1	black	40	45	50	5	1	2.51
362.708.00.1	black		48		5		2.81
361.789.00.1	black	50	50	50	10	1	2.81
363.789.00.1	black	56	56	50	10	1	2.43
364.789.00.1	black	60	63	50	5		2.81
365.789.00.1	black	70	75	50	5	1	2.81
366.789.00.1	black	90	90	30	5		2.81
367.988.00.1	black	80	90		5		3.83
367.708.00.1	black	100	110			1	11.03
367.789.00.1	black	100	110	50	10	1	3.27
368.789.00.1	black	125	125	30	5	1	4.20
369.789.00.1	black	150	160		10	1	5.84

### Geberit lip seal for flush pipe



click & scan

#### Technical data

Product material		EPDM			
Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
362.771.00.1	40	45	50	10	2.78

### Geberit PE sleeve for expansion sockets (from year of manufacture 2013)



click & scan

#### Application purposes

- For building drainage
- For Geberit HDPE expansion sockets (from year of manufacture 2013)

#### Technical data

Product material		EPDM		
Art. no.	DN	d, ø [mm]	SU1 [pc.]	GBP/pc.
242.922.00.1	30	32	1	2.41
242.923.00.1	40	40	1	2.41
242.924.00.1	50	50	1	3.62
242.925.00.1	56	56	1	3.62
242.926.00.1	60	63	1	6.07
242.927.00.1	70	75	1	6.07
242.928.00.1	90	90	1	7.30
242.929.00.1	100	110	1	8.52
242.930.00.1	125	125	1	14.60
242.931.00.1	150	160	1	19.14

### Geberit PE sleeve for expansion sockets (up to year of manufacture 2013)



click & scan

#### Application purposes

- For building drainage
- For Geberit HDPE expansion sockets

#### Technical data

Product material		EPDM		
Art. no.	DN	d, ø [mm]	SU1 [pc.]	GBP/pc.
853.522.00.1	40	40	1	8.51
853.523.00.1	50	50	1	9.90
853.524.00.1	56	56	1	12.28
853.526.00.1	70	75	1	17.01
853.527.00.1	90	90	1	19.33
853.528.00.1	100	110	1	131.10
853.529.00.1	125	125	1	25.70
853.531.00.1	150	160	1	33.68
853.705.00.1	200	200	1	36.99



## Geberit PE lip seal for connection bend



[click & scan](#)

### Application purposes

- For building drainage
- For Geberit HDPE outlet bends

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
387.282.00.1	90	90	50	10	1	12.62
240.813.00.1	100	110			1	6.05

## Geberit sleeve



[click & scan](#)

### Application purposes


- For bidets and washbasins

### Technical data

Product material	EPDM
------------------	------

Art. no.	d, ø [mm]	d1, ø [mm]	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
152.796.00.1	40	44	2.3		100	10	1	8.85
152.495.00.1	32	46	2.3		100	10	1	3.27
152.496.00.1	40	46	2.3		100	10	1	4.67
153.566.16.1	50	58	2.3	6400	100	10	1	8.85

## Geberit sleeve

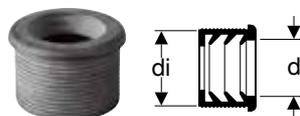

[click & scan](#)

### Application purposes

- For bidets and washbasins

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	di, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
152.682.00.1	50	32	44	100	10	1	5.64
152.689.00.1	56	32	50	100	10	1	8.85
152.690.00.1	56	40	50	100	10	1	9.20
152.691.00.1	60	32	57	100	10	1	9.41
152.692.00.1	60	40	57	100	10	1	9.41
152.693.00.1	60	50	57	100	10	1	9.69
152.694.00.1	70	50	70		50	1	13.59

## Geberit HDPE flange gasket



click & scan

### Application purposes

- For building drainage
- For creating flange connections

### Characteristics

- With seal made of EPDM

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	di, ø [mm]	D [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.742.00.1	50	50	45	9.2	0.3		1	3.57
363.742.00.1	56-60	56-63	59	10.7	0.3		1	4.49
365.742.00.1	70	75	69	12.7	0.3		1	5.35
366.742.00.1	90	90	83	14.2	0.3	10	1	8.51
367.742.00.1	100	110	102	16.2	0.3		1	9.54
368.742.00.1	125	125	116	19.2	0.3		1	10.00
369.742.00.1	150	160	149	21.7	0.3		1	11.92
370.742.00.1	200	200	191	27.2	0.3		1	14.88
371.742.00.1	250	250	238	32.7	0.4		1	25.29
372.742.00.1	300	315	298	37.7	0.4		1	32.72

## Geberit compression seal



click & scan

### Application purposes

- For Geberit HDPE screw connections
- For Geberit HDPE screw caps

### Technical data

Product material	EPDM
------------------	------

Art. no.	d, ø [mm]	di, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
362.783.00.1	48	44	50	10	2.81
364.783.00.1	63	59		5	2.81

## Geberit HDPE compression seal



click & scan

### Application purposes

- For building drainage
- For Geberit HDPE screw connections
- For Geberit HDPE screw caps

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.783.00.1	30	32		5		2.81
360.783.00.1	40	40		5	1	2.81
361.783.00.1	50	50		10	1	2.25
363.783.00.1	56	56	100	10	1	2.81
365.783.00.1	70	75		5		2.81
366.783.00.1	90	90		5	1	4.20
367.783.00.1	100	110		5	1	4.20



## Geberit compression seal



[click & scan](#)

### Application purposes

- For Geberit HDPE access pipes 45°
- For Geberit HDPE access pipes 90°

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	di, ø [mm]	SU1 [pc.]	GBP/pc.
887.371.00.1	100	110	98	1	9.90
853.405.00.1	125–150	125–160	108	1	2.89

## Geberit compression ring



[click & scan](#)

### Application purposes

- For Geberit HDPE screw connections

### Technical data

Product material	PP
------------------	----

Art. no.	DN	d, ø [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
379.782.16.1	30	32	5		5.70
360.782.16.1	40	40	10	1	2.81
362.782.16.1		48	10		2.81
361.782.16.1	50	50	10	1	1.29
363.782.16.1	56	56	10		2.81
364.782.16.1	60	63	5	1	2.81
365.782.16.1	70	75	5	1	2.81
366.782.16.1	90	90	5	1	2.81
367.782.16.1	100	110	5	1	2.81

## Geberit HDPE round cord ring for access pipe



[click & scan](#)

### Application purposes

- For oval service openings

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	SU1 [pc.]	GBP/pc.
853.928.00.1	100–150	110–160	1	3.03
853.970.00.1	200–300	200–315	1	0.93

## Geberit lip seal, EPDM



click & scan

### Application purposes

- For Geberit Silent-PP ring seal sockets
- For Geberit Silent-Pro ring seal sockets
- For Geberit HDPE ring seal sockets with lip seal


### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
242.278.00.1	30	32	100	10	1.88
241.785.00.1	40	40	100	10	1.88
241.786.00.1	50	50	100	10	1.88
244.126.00.1	56	56	100	10	1.88
244.127.00.1	60	63	100	10	3.04
241.787.00.1	70	75	100	10	3.04
241.790.00.1	90	90	100	10	3.04
241.791.00.1	100	110	100	10	3.04
242.279.00.1	125	125	100	10	1.88
242.280.00.1	150	160	100	10	1.88

## Protection covers

### Geberit protective cap



click & scan

### Application purposes


- For building drainage
- For site drainage
- For Geberit coupling sockets

### Technical data

Product material	PE-LD
------------------	-------

Art. no.	Colour / surface	DN	d, ø [mm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
366.820.92.1	yellow	90	90	8.3	3.3	800	50	10	1	7.03

### Geberit protective cap



click & scan

### Application purposes

- For building drainage
- For site drainage
- For Geberit coupling sockets
- For coupling sockets for floor-standing WCs

### Technical data

Product material	PE-LD
------------------	-------

Art. no.	Colour / surface	DN	d, ø [mm]	H [cm]	h [cm]	SU1 [pc.]	GBP/pc.
367.819.92.1	yellow	100	110	7.5	2.5	1	8.34



## Geberit protective cap for ring seal socket



[click & scan](#)

### Application purposes

- For building drainage

### Technical data

Product material	PE-LD
------------------	-------

Art. no.	Colour / surface	DN	d, ø [mm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
853.619.92.1	yellow	100	110	3.3	10	1	3.84

## Geberit protection cap



[click & scan](#)

### Application purposes

- For building drainage

### Technical data

Product material	PE-LD
------------------	-------

Art. no.	Colour / surface	DN	d, ø [mm]	h [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
853.612.92.1	yellow	40	40	2.8	10	1	4.20
853.614.92.1	yellow	50	50	2.8	10	1	4.20
853.615.92.1	yellow	56	56	2.8	10	1	2.56
853.616.92.1	yellow	60	63	2.8	10	1	3.02
853.617.92.1	yellow	70	75	2.9	10	1	3.02
853.618.92.1	yellow	90	90	2.9	10	1	3.57
853.620.92.1	yellow	125	125	3.4	10	1	4.59
853.622.92.1	yellow	150	160	3.5	10	1	7.71

## Consumables

### Geberit lubricant, 250 ml



[click & scan](#)

### Application purposes

- For lubricating the seals of push-fit connections
- For building drainage

Art. no.	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
953.761.00.1	780	10	1	6.21

## Geberit grease pencil with retractable lead



[click & scan](#)

### Application purposes

- For marking on Geberit pipes

### Characteristics

- Pressure pin with convenient one-hand operation
- Lead retractable for protection after use
- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.102.00.1	yellow	25	1	25.60

### Accessories

- Geberit spare leads for grease pencil with retractable lead → p. 66

## Geberit spare leads for grease pencil with retractable lead



[click & scan](#)

### Characteristics

- Water-soluble
- Washable from smooth surfaces
- UV-resistant

### Scope of delivery

- Box with 12 spare leads

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.103.00.1	yellow	25	1	25.60





# Geberit Silent-db20



<b>Preliminary remarks</b> .....	<b>71</b>
<b>Pipes</b> .....	<b>72</b>
<b>Fittings</b> .....	<b>72</b>
Bends .....	72
Branch fittings .....	76
Reducers.....	82
Access pipes.....	84
<b>SuperTube fittings</b> .....	<b>85</b>
Bends .....	85
Special fittings .....	86
<b>Connections</b> .....	<b>86</b>
Welding joints .....	86
Push-in connections .....	87
Clamping connectors .....	88
Adaptors to other product materials.....	88
<b>Waste Fittings</b> .....	<b>89</b>
Connection bends .....	89
Connection ring seal sockets.....	92
<b>Accessories</b> .....	<b>92</b>
Pipe brackets .....	92
Fastenings for pipe brackets .....	93
Sealings.....	94
Seals.....	95
Consumables .....	96



# Preliminary remarks

## Introduction to Geberit Silent-db20

The Geberit Silent-db20 is the perfect commercial soil & waste and drainage system. With robust pipes available in all common diameters, from 56 mm to 160 mm, and a comprehensive range of fittings and special fittings to suit most installations.

Whether it be in a residential complex, a hotel or in a meeting room, noisy discharge pipes are irritating - a problem that is easily eliminated with the Geberit Silent-db20 waste and drainage system. These pipes and fittings, optimised as they are with respect to sound insulation and hydraulics, are suitable for both discharge stacks and floor connections and ensure quiet and effective drainage in every kind of building.

## Benefits of Geberit Silent-db20

### Effective sound insulation

Made from mineral-reinforced plastic, making it denser than HPDE, effectively reducing the natural vibrations and noise.

### Clean installation

No chemicals used in the installation process

### Chemical resistant

Resistant to a wide range of chemicals

### Temperature resistant

Resistant to hot and cold

### Impact resistant

Flexible materials absorbs impact

### Innovative fitting design

Fittings are ribbed at impact areas to reduce the air borne noise transfer

### Technical assistance

Answer email & telephone enquiries, as well as project take offs

### Experienced

More than 60 years of practical experience in drainage technology

## Always consider

When fitting an acoustic installation, it is not just the drainage system which needs careful consideration. Try to have as few offsets as possible to reduce the amount of impact zones, thus decreasing the sound. If an offset is necessary, use 2x 45degree bends instead.

Ensure you decouple the whole installation away from the construction of the building. Use rubber lined brackets to absorb the vibrations, as well as sound insulation for pipes coming into contact with the walls and floors.

## Use the correct tooling

There are two main connection methods, butt-welding and electrowelding. Geberit recommends electrowelding Silent-db20 pipes and fittings, to ensure a smooth bore is maintained throughout the system, ensuring minimal noise transfer.

### Butt-welding:

- Great for prefabrication on or off site
- Media machine up to 160mm
- Universal machine up to 315mm
- Use HM planer blade set for Geberit Silent-db20

### Electrowelding:

- Great for on-site installations
- Use AW 315G (from Advanced Welding) 110v for up to 315mm

Our Specification team can take plan drawings, schematics and any other relevant installation information and they will create a take off for your project free of charge.


If you would like to use this service, please email [specification.gb@geberit.com](mailto:specification.gb@geberit.com)

If you require any technical assistance, please contact the technical department on 01926 516800, or email [technical@geberit.co.uk](mailto:technical@geberit.co.uk).



## Pipes

### Geberit Silent-db20 pipe

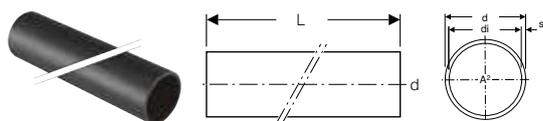

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics

- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	L [m]	A <sup>2</sup> [cm <sup>2</sup> ]	SU4 [m]	SU2 [m]	GBP/m
305.000.14.1	56	56	49.6	3.2	3	19.3	264	3	14.14
306.000.14.1	60	63	56.6	3.2	3	25.1	234	3	17.27
307.000.14.1	70	75	67.8	3.6	3	36.1	189	3	21.08
308.000.14.1	90	90	79	5.5	3	49	126	3	31.11
310.000.14.1	100	110	98	6	3	75.4	102	3	33.59
315.001.14.1	150	160	146	7	3	167.4	66	3	53.83

## Fittings

### Bends

#### Geberit Silent-db20 bend

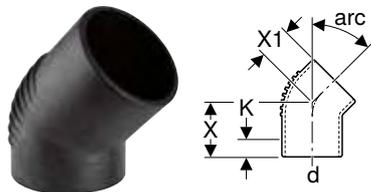

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics

- Can be shortened
- Long leg
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	X [cm]	X1 [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>arc / angle: 15°</b>										
305.150.14.1	56	56	7.5	4.5	3.5	960	60	10	1	6.48
306.150.14.1	60	63	7.5	5	3.5	640	40	10	1	9.87
307.150.14.1	70	75	8	5	3.5	480	60	10	1	9.87
308.150.14.1	90	90	10	5.5	5.5	320	20		1	15.08
310.150.14.1	100	110	10	6	5.5	160	20	10	1	15.08
315.150.14.1	150	160	13	7.5	8	64	4		1	59.76
<b>arc / angle: 30°</b>										
305.300.14.1	56	56	7.5	4.5	3.5	800	50	10	1	6.48
306.300.14.1	60	63	7.5	5	3	800	50	10	1	9.87
307.300.14.1	70	75	8	5	3.5	480	60	10	1	9.87
308.300.14.1	90	90	10	6.5	4.5	320	20		1	15.08
310.300.14.1	100	110	10	6	4.5	160	20		1	15.08
315.300.14.1	150	160	15.7	15.7	7	32	4		1	116.97

Art. no.	DN	d, ø [mm]	X [cm]	X1 [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>arc / angle: 45°</b>										
305.450.14.1	56	56	7.5	4.5	3	960	60	10	1	6.48
306.450.14.1	60	63	7.5	5	2.5	640	80	20	1	9.87
307.450.14.1	70	75	8	5	2.5	480	60	10	1	9.87
308.450.14.1	90	90	10	5.5	4	320	40		1	15.08
310.450.14.1	100	110	10	6	4	160	20		1	15.08
315.450.14.1	150	160	15.5	9.5	8	64	4		1	35.82
<b>arc / angle: 67°</b>										
305.670.14.1	56	56	7.5	5.5	2	800	50	10	1	6.48
307.670.14.1	70	75	8	6	2	480	60	10	1	9.87
308.670.14.1	90	90	10	7	3	320	40	10	1	22.12
310.670.14.1	100	110	10	8	2.5	160	20	10	1	22.12



## Geberit Silent-db20 bend with large leg



click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

### Technical data


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

### Characteristics

- Can be shortened
- Long leg
- Fitting welded
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

Art. no.	DN	d, ø [mm]	X [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>arc / angle: 60°</b>									
305.600.14.1	56	56	9.1	3.5		50	10	1	28.59
306.600.14.1	60	63	9.7	3		50	10	1	28.59
307.600.14.1	70	75	11.3	3.5		40	10	1	28.59
308.600.14.1	90	90	13.8	4.5	120		10	1	51.98
310.600.14.1	100	110	14.6	4.5	120		10	1	51.98
<b>arc / angle: 88.5°</b>									
305.885.14.1	56	56	11	3	400	50	10	1	18.19
306.885.14.1	60	63	11.5	2.5	400	50	10	1	18.19
307.885.14.1	70	75	12.8	2.5	320	20		1	18.19
308.885.14.1	90	90	15.6	4	160	20		1	38.97
310.885.14.1	100	110	16.9	4	120		10	1	38.97
315.885.14.1	150	160	22.5	8	32	4		1	106.10

### Geberit Silent-db20 bend 88.5°

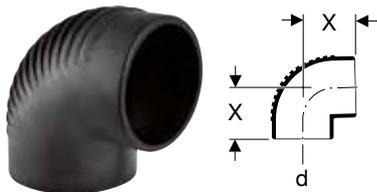

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics


- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	arc [°]	X [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.880.14.1	56	56	88.5	6.5	960	60	10	1	7.80
306.880.14.1	60	63	88.5	7	640	40	10	1	7.80
307.880.14.1	70	75	88.5	7.5	480	60	10	1	7.80
308.880.14.1	90	90	88.5	8	320	40	10	1	12.59
310.880.14.1	100	110	88.5	9.5	160	10	10	1	13.61

### Geberit Silent-db20 bend 45° with large leg

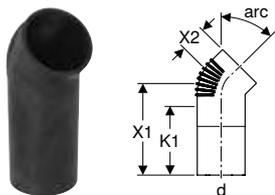

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics


- Can be shortened
- Fitting welded
- Long leg
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	arc [°]	X1 [cm]	X2 [cm]	K1 max. [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
308.014.14.1	90	90	45	21	5.5	15.5	10	1	36.16
310.014.14.1	100	110	45	21	6	15	10	1	38.97

## Geberit Silent-db20 bend 90° with large leg

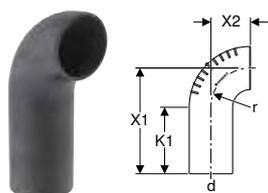

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

### Characteristics

- Long leg
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	arc [°]	X1 [cm]	X2 [cm]	K1 max. [cm]	r [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
306.008.14.1	60	63	90	21	5	12.6	5	400	50	10	1	19.33
310.008.14.1	100	110	90	27	10	13.6	10	96	12		1	34.38

## Geberit Silent-db20 Offset fitting



click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For vertical installation
- For tension-free compensation of offset in stack (≤ 10 cm per floor) in combination with repair socket or double sleeve coupling
- For a pipe length of minimum 1.5 m and maximum 3 m between two Geberit Silent-db20 Offset fittings

### Characteristics

- Abrasion resistant
- Highly sound-insulating
- UV-resistant
- Swivelling ball joint


### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	Colour / surface	DN	d, ø [mm]	D [cm]	H [cm]	h1 [cm]	h2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.048.14.1	black matt	100	110	13.6	26	5.3	13	144	12	2	1	44.40

## Branch fittings

### Geberit Silent-db20 branch fitting 45°

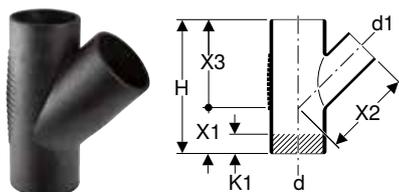

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics


- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.054.14.1	56 / 56	56	56	45	18	6	12	12	1.5	400	50	10	1	9.47
306.054.14.1	60 / 56	63	56	45	19.5	6.5	13	13	2	320	40	10	1	9.80
306.064.14.1	60 / 60	63	63	45	19.5	6.5	13	13	2	320	40	10	1	9.80
307.054.14.1	70 / 56	75	56	45	21	7	14	14	3.5	240	30	10	1	11.41
307.064.14.1	70 / 60	75	63	45	21	7	14	14	3	240	30	10	1	11.41
307.074.14.1	70 / 70	75	75	45	21	7	14	14	2	240	30	10	1	11.41
308.054.14.1	90 / 56	90	56	45	24	8	16	16	5	160		10	1	15.72
308.064.14.1	90 / 60	90	63	45	24	8	16	16	5	160		10	1	22.52
308.074.14.1	90 / 70	90	75	45	24	8	16	16	4	160		10	1	22.52
308.084.14.1	90 / 90	90	90	45	24	8	16	16	2.5	160		10	1	22.52
310.054.14.1	100 / 56	110	56	45	27	9	18	18	7	120		15	1	22.52
310.064.14.1	100 / 60	110	63	45	27	9	18	18	6.5	120		15	1	22.52
310.074.14.1	100 / 70	110	75	45	27	9	18	18	5.5	80		10	1	22.52
310.084.14.1	100 / 90	110	90	45	27	9	18	18	4.5	80		10	1	22.52
310.104.14.1	100 / 100	110	110	45	27	9	18	18	3	80		10	1	22.52
315.144.14.1	150 / 150	160	160	45	41.5	14	27.5	27.5	7	16	2		1	129.94

### Geberit Silent-db20 branch fitting 45°

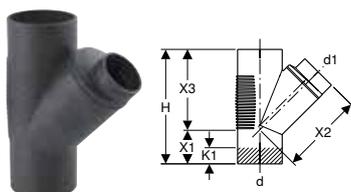

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics


- Fitting welded
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
315.104.14.1	150 / 100	160	110	45	41.5	10.6	30	30.9	7	16	2	1	129.94

## Geberit Silent-db20 branch fitting 88.5°, swept-entry

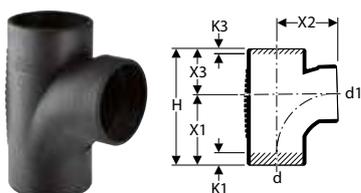

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

### Characteristics


- Swept entry
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
308.089.14.1	90 / 90	90	90	88.5	20.4	12	10.5	8.3	1.5	0.5	160	10	1	22.52
310.088.14.1	100 / 90	110	90	88.5	22.5	13.5	11.5	9	4	1	120	10	1	22.52
310.108.14.1	100 / 100	110	110	88.5	22.5	13.5	11.5	9	2.5	0	120	10	1	22.52

## Geberit Silent-db20 branch fitting 88.5°

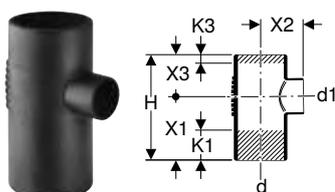

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

### Characteristics


- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.058.14.1	56 / 56	56	56	88.5	17.5	10.5	7	7	4.5	0.5	480	60	10	1	9.47
306.058.14.1	60 / 56	63	56	88.5	17.5	10.5	7	7	4.5	0.5	320	40	10	1	9.80
306.068.14.1	60 / 60	63	63	88.5	17.5	10.5	7	7	4	0	320	40	10	1	9.80
307.058.14.1	70 / 56	75	56	88.5	18	10.5	7	7.5	4.5	0.5	320	40	10	1	12.24
307.068.14.1	70 / 60	75	63	88.5	18	10.5	7.5	7.5	4	0	240	30	10	1	12.24
307.078.14.1	70 / 70	75	75	88.5	18	10.5	7.5	7.5	3.5	0	240	30	10	1	12.24
308.058.14.1	90 / 56	90	56	88.5	20.3	12	8	8.3	6	2	240	15	1	22.52	
308.068.14.1	90 / 60	90	63	88.5	20.3	12	8	8.3	5.5	1.5	160	10	1	22.52	
308.078.14.1	90 / 70	90	75	88.5	20.3	12	8	8.3	5	1	240	15	1	22.52	
308.088.14.1	90 / 90	90	90	88.5	20.3	12	8.3	8.3	4.5	0.5	160	10	1	22.52	
310.058.14.1	100 / 56	110	56	88.5	22.5	13.5	9	9	7.5	3	160	10	1	22.52	
310.068.14.1	100 / 60	110	63	88.5	22.5	13.5	9	9	7	2.5	160	10	1	22.52	
310.078.14.1	100 / 70	110	75	88.5	22.5	13.5	9	9	6.5	1.5	160	10	1	22.52	
315.148.14.1	150 / 150	160	160	88.5	33.5	18.5	15	15	7	3	32	2	1	136.43	

**Geberit Silent-db20 branch fitting 88.5°**

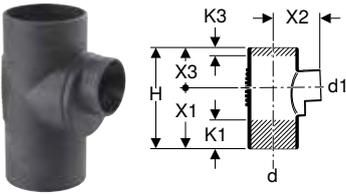

click & scan

**Application purposes**

- For building drainage
- For buildings with increased sound insulation requirements

**Characteristics**


- Fitting welded
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

**Technical data**

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
315.108.14.1	150 / 100	160	110	88.5	33.5	21	15	12.5	7	1.5	32	2	1	136.43

**Geberit Silent-db20 double branch fitting 88.5°, swept-entry**

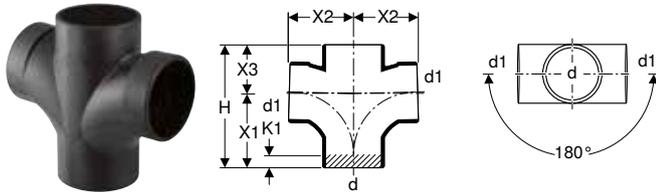

click & scan

**Application purposes**

- For building drainage
- For buildings with increased sound insulation requirements
- For vertical installation

**Characteristics**


- Swept entry
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

**Technical data**

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
308.082.14.1	90	90	90	88.5	20.3	12	10.5	8.3	1.5	160	10	1	62.10
310.102.14.1	100	110	110	88.5	22.5	13.5	11.5	9	2.5	80	10	1	71.36

**Geberit Silent-db20 corner branch fitting 88.5° / 90°, swept-entry**

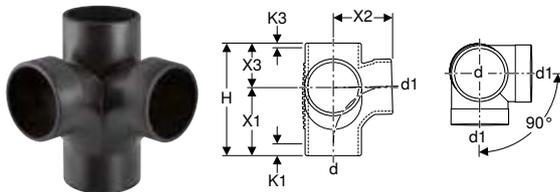

click & scan

**Application purposes**

- For building drainage
- For buildings with increased sound insulation requirements

**Characteristics**


- Swept entry
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

**Technical data**

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
308.083.14.1	90 / 90	90	90	88.5	20.3	12	10.5	8.3	1.5	0.5	120		10	1	71.36
310.083.14.1	100 / 100	110	110	88.5	22.6	13.6	11.5	9	2.5	0	80	10		1	58.03

### Geberit Silent-db20 corner branch fitting 88.5° / 135°, swept-entry

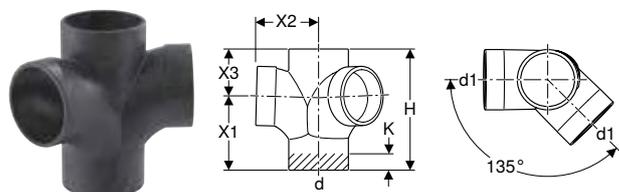

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For vertical installation

#### Characteristics


- Swept entry
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	arc2 [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.105.14.1	100 / 100	110	110	88.5	135	22.5	13.5	11.5	9	2	80	10	1	62.10

### Geberit Silent-db20 quadruple branch fitting 88.5°

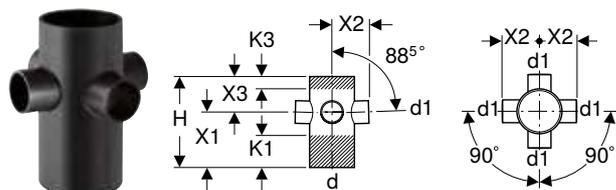

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics

- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.445.14.1	100 / 56	110	56	88.5	22.5	13.5	9	9	7.5	3	120	15	1	107.80

**Geberit Silent-db20 combined branch fitting 88.5°, swept-entry**



click & scan

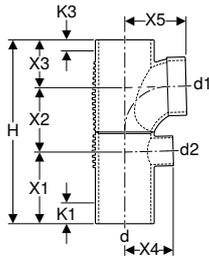

**Application purposes**

- For building drainage
- For buildings with increased sound insulation requirements
- For connecting low-lying drains on shower elements

**Characteristics**

- Swept entry
- Fitting welded
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

**Technical data**


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	X4 [cm]	X5	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
308.811.14.1	90 / 90 / 56	90	90	56	88.5	31.6	12	11.3	8.3	8	10.5	6	0.5	96	4	1	80.02
310.811.14.1	100 / 90 / 56	110	90	56	88.5	33.8	13.5	11.3	9	9	11.5	7.5	1	60	5	1	84.26
310.813.14.1	100 / 100 / 56	110	110	56	88.5	34.8	13.5	12.3	9	9	11.5	7.5	0	60	5	1	84.26

**Geberit Silent-db20 combined corner branch fitting 88.5°, swept-entry, left**



click & scan

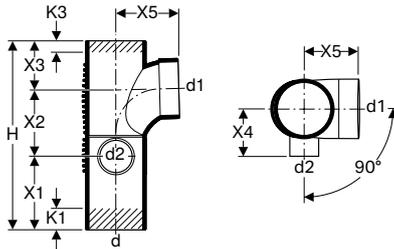

**Application purposes**

- For building drainage
- For buildings with increased sound insulation requirements
- For connecting low-lying drains on shower elements

**Characteristics**


- Swept entry
- Highly sound-insulating
- Fitting welded
- Abrasion resistant
- UV-resistant

**Technical data**

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	X4 [cm]	X5	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
308.817.14.1	90 / 90 / 56	90	90	56	88.5	31.6	12	11.3	8.3	8	10.5	6	0.5	96	4	1	80.42
310.817.14.1	100 / 90 / 56	110	90	56	90	33.8	13.5	11.3	9	9	11.5	7.5	1	60	5	1	84.67
310.117.14.1	100 / 100 / 56	110	110	56	90	34.8	13.5	12.3	9	9	11.5	7.5	0	60	5	1	84.67

### Geberit Silent-db20 combined corner branch fitting 88.5°, swept-entry, right

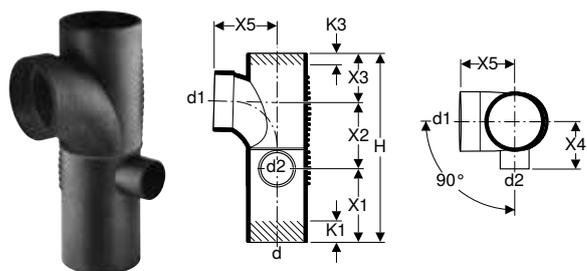

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For connecting low-lying drains on shower elements

#### Characteristics


- Swept entry
- Highly sound-insulating
- Fitting welded
- Abrasion resistant
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	X4 [cm]	X5	K1 max. [cm]	K3 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
308.815.14.1	90 / 90 / 56	90	90	56	88.5	31.6	12	11.3	8.3	8	10.5	6	0.5	96	4	1	80.42
310.815.14.1	100 / 90 / 56	110	90	56	88.5	33.8	13.5	11.3	9	9	11.5	7.5	1		5	1	84.67
310.115.14.1	100 / 100 / 56	110	110	56	88.5	34.8	13.5	12.3	9	9	11.5	7.5	0		5	1	84.67

### Geberit Silent-db20 duct branch fitting 88.5°, swept-entry, left

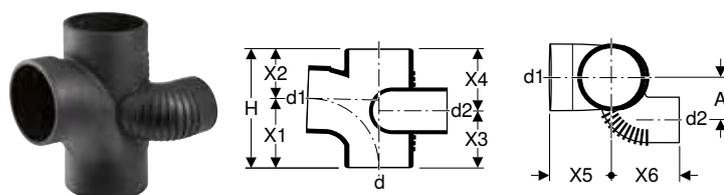

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics


- Swept entry
- Fitting welded
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	A [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	X4 [cm]	X5 [cm]	X6 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
308.872.14.1	90 / 90 / 70	90	90	75	88.5	8.1	20.3	12	8.3	12	8.3	10.6	14.2	80	10	1	98.84
310.872.14.1	100 / 90 / 70	110	90	75	88.5	7.7	22.5	13.5	9	12.8	9.7	11.5	9.3	80	10	1	98.84
310.172.14.1	100 / 100 / 70	110	110	75	88.5	7.7	22.5	13.5	9	11.8	10.7	11.5	9.3	80	10	1	98.84

## Geberit Silent-db20 duct branch fitting 88.5°, swept-entry, right

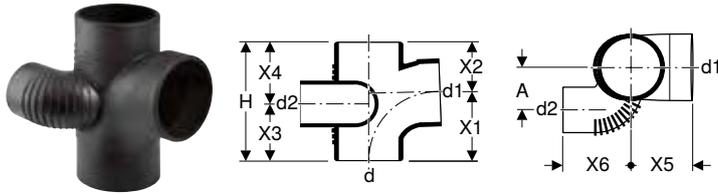

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

### Technical data


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

### Characteristics

- Swept entry
- Fitting welded
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	A [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	X4 [cm]	X5 [cm]	X6 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
308.871.14.1	90 / 90 / 70	90	90	75	88.5	8.1	20.3	12	8.3	12	8.3	10.6	14.2	80	10	1	98.84
310.871.14.1	100 / 90 / 70	110	90	75	88.5	7.7	22.5	13.5	9	12.8	9.7	11.5	9.3	80	10	1	98.84
310.171.14.1	100 / 100 / 70	110	110	75	88.5	7.7	22.5	13.5	9	11.8	10.7	11.5	9.3	80	10	1	98.84

## Geberit Silent-db20 parallel branch fitting 45°

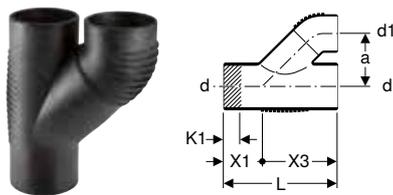

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

### Characteristics

- Fitting welded
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	a [cm]	L [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
308.081.14.1	90 / 90	90	90	45	11	24	8	16	16	2.5		10	1	60.09
310.081.14.1	100 / 90	110	90	45	12.5	27	9	18	18	4.5	80	10	1	60.09
310.101.14.1	100 / 100	110	110	45	12.5	27	9	18	18	3	80	10	1	60.09

## Reducers

### Geberit Silent-db20 reducer, eccentric, short



click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For reducing the diameter of pipes and fittings outside the expansion range of couplings

### Characteristics

- Eccentric
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	H [cm]	h [cm]	h1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
306.050.14.1	60 / 56	63	56	0.4	8	3.4	3.7	1440	60	10	1	5.91
307.050.14.1	70 / 56	75	56	0.9	8	3.3	3.7	1280	80	10	1	6.68
307.060.14.1	70 / 60	75	63	0.6	8	3.3	3.7	960	60	10	1	9.02
308.050.14.1	90 / 56	90	56	1.5	8	3.1	3.7	800	50	10	1	9.02
308.060.14.1	90 / 60	90	63	1.1	8	3.1	3.7	800	50	10	1	10.70
308.070.14.1	90 / 70	90	75	0.6	8	3.3	3.7	800	50	10	1	10.70

### Geberit Silent-db20 reducer, eccentric



click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics

- Eccentric
- With stopper for ring seal socket
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	A [cm]	H [cm]	h [cm]	h1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.050.14.1	100 / 56	110	56	2.4	11	6	3.7	320	40	10	1	10.70
310.060.14.1	100 / 60	110	63	2.1	11	6.1	3.7	320	40	10	1	11.71
310.070.14.1	100 / 70	110	75	1.5	11	6	3.7	320	40	10	1	11.71
310.080.14.1	100 / 90	110	90	1	11	6.1	3.7	320	40	10	1	11.71
315.100.14.1	150 / 100	160	110	2.4	12.6	8	3.8	144	6		1	40.30

### Geberit Silent-db20 reducer, concentric



click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Characteristics

- With stopper for ring seal socket
- Concentric
- Abrasion resistant
- Highly sound-insulating
- UV-resistant


#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	h [cm]	h1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
310.052.14.1	100 / 56	110	56	11	6.1	3.7	320	40	10	14.18
310.062.14.1	100 / 60	110	63	11	6.1	3.7	320	40	10	14.22
310.072.14.1	100 / 70	110	75	11	6.1	3.7	320	40	10	15.88
310.082.14.1	100 / 90	110	90	11	6.1	3.7	320	40	10	25.27

## Access pipes

### Geberit Silent-db20 access pipe 45° with round service opening

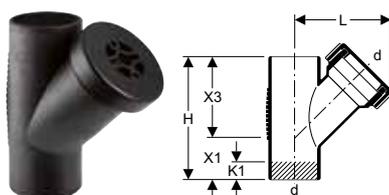

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

#### Characteristics


- With seal made of EPDM
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Scope of delivery

- Cover made of PP

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	H [cm]	X1 [cm]	X2 [cm]	X3 [cm]	K1 max. [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
307.345.14.1	70	75	45	15.5	21	7	14	14	2		10	1	49.95
310.345.14.1	100	110	45	19	27	9	18	18	3	80	10	1	50.23

### Geberit Silent-db20 access pipe 90° with round service opening

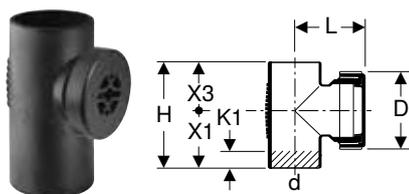

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

#### Characteristics

- With seal made of EPDM
- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Scope of delivery


- Cover made of PP

Art. no.	DN	d, ø [mm]	arc [°]	D [cm]	L [cm]	H [cm]	X1 [cm]	X3 [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
307.333.14.1	70	75	90	11.5	10	17.5	10.5	7	3.5	240		20	1	43.18
308.333.14.1	90	90	90	12.9	11.5	20.3	12	8.3	1.5	160		10	1	48.84
310.334.14.1	100	110	90	14.5	9	24	13.5	10.5	2.5	96		12	1	51.22
315.333.14.1	150	160	90	14.4	13.9	33.5	18.5	15	7	32	2		1	137.70

# SuperTube fittings

## Bends

### Geberit Silent-db20 BottomTurn bend

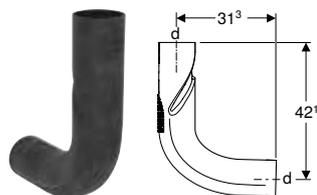

click & scan



#### Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)
- For use with Geberit Silent-db20 Sovent fitting d110
- For buildings with increased sound insulation requirements

#### Characteristics


- Abrasion resistant
- Highly sound-insulating
- Can be welded on both sides with electrofusion coupling
- UV-resistant
- With SuperTube technology

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	arc [°]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.051.14.1	100	110	≤ 12	90	6	1	471.82

### Geberit Silent-db20 BackFlip bend

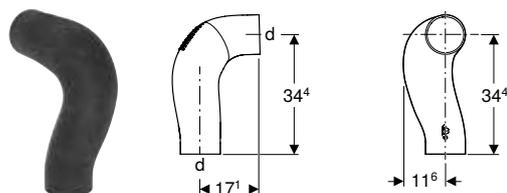

click & scan

#### Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)
- For use with Geberit Silent-db20 Sovent fitting d110
- For buildings with increased sound insulation requirements

#### Characteristics

- Abrasion resistant
- Highly sound-insulating
- Can be welded on both sides with electrofusion coupling
- UV-resistant
- With SuperTube technology


#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	arc [°]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.053.14.1	100	110	≤ 12	90	6	1	218.24

## Special fittings

### Geberit Silent-db20 Sovent fitting

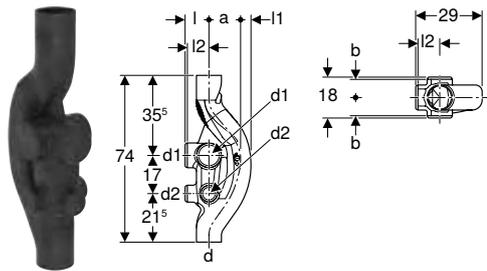

click & scan

#### Application purposes

- For building drainage
- For buildings with more than five floors (high-rise buildings)
- For buildings with increased sound insulation requirements

#### Characteristics

- Abrasion resistant
- Highly sound-insulating
- Six connection options, closed
- UV-resistant
- With SuperTube technology

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	d1, ø [mm]	d2, ø [mm]	a [cm]	L [cm]	l [cm]	l1 [cm]	l2 [cm]	b [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.049.14.1	100 / 70	110	≤ 12	110	75	13	7.5	10.5	5.5	9.5	8	18	2	1	425.64

## Connections

### Welding joints

#### Geberit electrofusion coupling



click & scan

#### Application purposes

- For site drainage
- For building drainage
- For high-tensile, permanent connection of pipes and fittings

#### Characteristics

- Can be welded with Geberit electrofusion tools
- UV-resistant

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PE-HD


Art. no.	DN	d, ø [mm]	D [cm]	E [cm]	H [cm]	X [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
363.771.16.1	56	56	6.8	2.8	6	0.3	1800	36	12	1	6.21
364.771.16.1	60	63	7.6	2.8	6	0.3	1512	36	12	1	6.94
365.771.16.1	70	75	8.9	2.8	6	0.3	1152	72	12	1	7.30
366.771.16.1	90	90	10.4	2.8	6	0.3	864	36	12	1	8.84
367.771.16.1	100	110	12.5	2.8	6	0.3	648	72	12	1	9.84
369.771.16.1	150	160	17.8	2.8	6	0.3	288	24	6	1	22.69



- Can be welded with Advance Welding AW-315G electrofusion machine

## Push-in connections

### Geberit Silent-db20 expansion socket with double flange

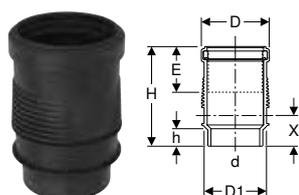

click & scan



#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For horizontal and vertical installation
- For combining with high-tensile pipe joints
- For compensating for material expansion in fittings and pipes up to max. 6 m in length
- For use with temperature differentials of between -10 and +60 °C
- For use with Geberit pipe bracket one DN larger

#### Characteristics

- With expansion compensation
- Abrasion resistant
- Highly sound-insulating
- UV-resistant
- With lip seal made of EPDM

#### Scope of delivery

- Protective cap

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	D [cm]	D1 [cm]	E [cm]	H [cm]	h [cm]	X [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
307.012.14.1	70	75	9.8	9	8.8	20	3.7	6.2	240	20		1	23.41
308.012.14.1	90	90	11.4	11	8.8	20	3.4	6.2	180	15		1	23.41
310.012.14.1	100	110	13.5	12.5	9	20	3.3	6.2	120	10		1	23.41
315.012.14.1	150	160	19.5	17.8	9.8	21.5	3.5	7.1	60		5	1	72.23



- The insertion depth dimensions (E) refer to an installation temperature of 20 °C

### Geberit Silent-db20 double sleeve coupling



click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For horizontal and vertical installation
- For combining with Geberit electrofusion couplings and clamping connectors
- For connecting pipes and fittings
- For compensating for material expansion in fittings and pipes up to max. 4 m in length
- For use with Geberit pipe bracket one DN larger

#### Characteristics

- With expansion compensation and pull-out lock
- Claw ring made of chrome nickel steel
- With lip seal made of EPDM
- Abrasion resistant
- Highly sound-insulating
- UV-resistant


#### Technical data

Product material	PP
------------------	----

Art. no.	DN	d, ø [mm]	D [cm]	D1 [cm]	E [cm]	E1 [cm]	H [cm]	X [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.002.14.1	56	56	8	6.3	6	3.5	10.8	1.3	800	50	10	1	90.95
306.002.14.1	60	63	8.7	7.5	6	3.5	10.8	1.3	640	40	10	1	90.95
307.002.14.1	70	75	10	9	6	3.5	10.8	1.3	480	60	10	1	90.95
308.002.14.1	90	90	11.4	11	6.3	3.5	11.1	1.3	320	40	10	1	90.95
310.002.14.1	100	110	13.4	12.5	6.3	3.5	11.1	1.3	240	20	10	1	116.97
315.002.14.1	150	160	19.2	17.8	7	5.2	13.5	1.3	96	4		1	96.19

## Clamping connectors

### Geberit Silent-db20 clamping connector

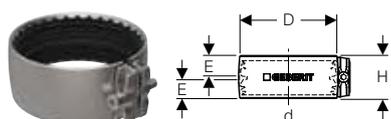

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For combining with Geberit Silent-db20 double sleeve couplings
- For connecting pipes and fittings

#### Characteristics

- With seal made of EPDM


#### Technical data

Product material	CrTi steel 1.4510 (EN 10088)
------------------	------------------------------

Art. no.	DN	d, ø [mm]	D [cm]	E [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.003.14.3	56	56	6.7	2.4	5.2	1050	50	10	1	18.71
307.003.14.3	70	75	8.6	2.4	5.2	1050	50	10	1	18.71
308.003.14.3	90	90	10.1	2.4	5.2	800	50	10	1	21.04
310.003.14.3	100	110	12	2.4	5.2	800	50	10	1	21.80
315.003.14.3	150	160	17.2	3.2	6.7	200	25	5	1	25.52

## Adaptors to other product materials

### Geberit adaptor socket to Geberit Silent-db20

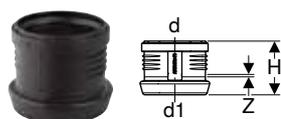

click & scan

#### Application purposes

- For draining off waste water within buildings
- For transitions from Geberit Silent-PP or Geberit Silent-Pro to Geberit Silent-db20 or to Geberit PE
- For transitions from Geberit Silent-db20 or Geberit PE to Geberit Silent-PP or to Geberit Silent-Pro

#### Characteristics

- Acoustically optimised
- With lip seal made of EPDM
- Claw ring made of chrome nickel steel

#### Technical data


Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.296.14.1	50 / 56	50	56	8.7	0.3	640	40	10		9.37
390.396.14.1	70 / 70	75	75	9.2	0.3	400	50	10		13.83
390.496.14.1	90 / 90	90	90	9.7	0.3	400	50	10		15.31
390.596.14.1	100 / 100	110	110	10.4	0.3	240	30	5		15.75
390.796.14.1	150 / 150	160	160	13.6	0.4	80		5	1	100.90



- Also for transitions from Geberit Silent-PP to Geberit HDPE

### Geberit adaptor clamping connector

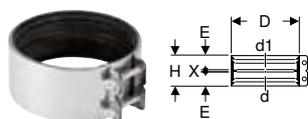

click & scan

#### Application purposes

- For building drainage
- For site drainage
- For connecting pipes and fittings made of the same or different product materials

#### Characteristics

- With seal made of EPDM


### Technical data

Product material	Stainless steel
------------------	-----------------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	D [cm]	E [cm]	H [cm]	X [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.426.00.2	56	56	58	7.5	2.7	5.7	0.3	50	10	1	27.44
359.427.00.2	56	56	68	8.3	2.7	5.7	0.3	50	10	1	27.44
359.428.00.2	60	63	60	7.8	2.7	5.7	0.3	50	10	1	28.34
359.429.00.2	60	63-64	63-64	7.8	2.7	5.7	0.3	50	10	1	28.34
359.430.00.2	60	63-64	68	8.3	2.7	5.7	0.3	50	10	1	28.34
359.432.00.2	70	75	68	9	2.7	5.7	0.3	50	10	1	29.29
359.433.00.2	70	75-76	75-76	8.8	2.7	5.7	0.3	50	10	1	28.70
359.434.00.2	70	75-76	78	9.3	2.7	5.7	0.3	50	10	1	29.29
359.435.00.2	70	75-76	83-84	9.8	2.7	5.7	0.3	50	10	1	28.70
359.436.00.2	70	75-76	89-90	10.3	2.7	5.7	0.3	50	10	1	29.29
359.437.00.2	90	89-90	83-84	11.1	2.7	5.7	0.3	50	10	1	30.18
359.438.00.2	90	89-90	89-90	10.3	2.7	5.7	0.3	50	10	1	30.18
359.439.00.2	90	89-90	96	11.1	3.3	6.9	0.3	50	10	1	30.18
359.440.00.2	100	108-110	106	12.5	2.7	5.7	0.3	50	10	1	31.11
359.441.00.2	100	108-110	108-110	12.5	2.7	5.7	0.3	50	10	1	31.11
359.442.00.2	100	108-110	114-116	13.1	3.3	6.9	0.3	50	10	1	31.11
359.444.00.2	125	125	131-135	15	3.3	6.9	0.3	30	10	1	36.57
359.448.00.2	150	159-160	152	17.5	3.3	6.9	0.3	20	10	1	58.56
359.449.00.2	150	159-160	159-160	17.5	3.3	6.9	0.3	20	10	1	58.56
359.450.00.2	150	159-160	168	18.3	3.3	6.9	0.3	20	10	1	58.56

## Waste Fittings Connection bends

### Geberit Silent-db20 bend 90°, extended, with small radius

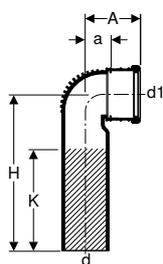

click & scan

#### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For Geberit Duofix frames for wall-hung WC
- For Geberit GIS elements for wall-hung WC
- For connecting sanitary appliances with horizontal outlet

#### Characteristics

- Abrasion resistant
- Highly sound-insulating
- UV-resistant

#### Scope of delivery


- Lip seal made of EPDM
- Protective cap

#### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	H [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
308.883.14.1	90/90	90	90	90	11	4.9	30	19	96	12	1	82.37
310.883.14.1	100/90	110	90	90	10	4.3	30	17	80	10	1	80.35

**Geberit Silent-db20 connection bend 90° for wall-hung WC, shortened, with small radius**

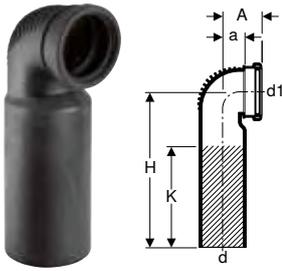

click & scan

**Application purposes**

- For building drainage
- For buildings with increased sound insulation requirements
- For connecting sanitary appliances with horizontal outlet

**Characteristics**

- Abrasion resistant
- Highly sound-insulating
- UV-resistant
- Concentric

**Technical data**


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

**Scope of delivery**

- Lip seal made of EPDM
- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	A [cm]	a [cm]	H [cm]	K [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
308.881.14.1	90	90	90	90	7.5	3.9	30	19	120	15	1	82.37
310.881.14.1	90 / 100	110	90	90	7.5	4.2	30	18	96	12	1	65.50

**Geberit Silent-db20 connection bend 90°, extended**

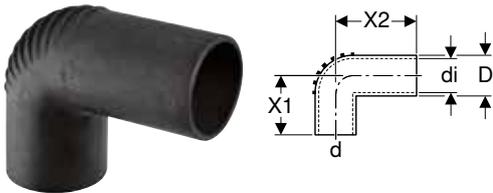

click & scan

**Application purposes**

- For building drainage
- For buildings with increased sound insulation requirements
- For sleeves

**Characteristics**

- Abrasion resistant
- Highly sound-insulating
- UV-resistant

**Technical data**


Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	arc [°]	di, ø [mm]	D [cm]	X1 [cm]	X2 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.905.14.1	56	56	90	50	5.6	7.5	10	800	50	10	1	8.01
305.906.14.1	56	56	90	57	6.3	7.5	20	320	40	10	1	8.01

**Accessories**

- Geberit sleeve → p. 61
- Geberit sleeve → p. 61

## Geberit Silent-db20 connection bend 90°, reduced, extended

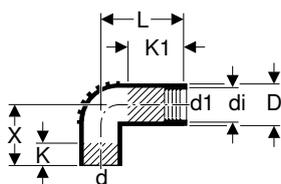

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

### Characteristics


- Abrasion resistant
- Highly sound-insulating
- UV-resistant
- Concentric

### Scope of delivery

- Sleeve made of EPDM
- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	di, ø [mm]	D [cm]	L [cm]	X [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
306.906.14.1	63 / 56	63	56	90	63	6.8	15	10	3	9	320	20	1	26.34

## Geberit Silent-db20 connection bend 90°, extended

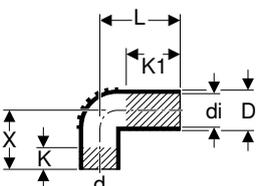

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For Geberit Duofix elements for washbasin, urinal or bidet
- For Geberit GIS elements for washbasin, urinal or bidet
- For sleeves

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

### Characteristics


- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	arc [°]	di, ø [mm]	D [cm]	L [cm]	X [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.904.14.1	56	56	90	46	5.2	15	10	4	10	400	50	10	1	8.01

## Geberit Silent-db20 connection bend 90°, extended

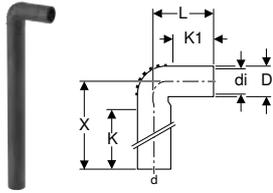

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For Geberit Duofix elements for washbasin, urinal or bidet
- For Geberit GIS elements for washbasin, urinal or bidet
- For sleeves

### Characteristics

- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Scope of delivery

- Protective cap

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	arc [°]	di, ø [mm]	D [cm]	L [cm]	X [cm]	K [cm]	K1 max. [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.907.14.1	56	56	90	46	5.2	15	57	49.5	7	200	50	10	1	37.14

## Connection ring seal sockets

### Geberit Silent-db20 connection ring seal socket, reduced



click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For Geberit waste fittings ø 50 mm

### Characteristics

- Abrasion resistant
- Highly sound-insulating
- UV-resistant
- With lip seal made of EPDM

### Scope of delivery

- Protective cap

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	di, ø [mm]	E [cm]	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
305.040.14.3	56 / 50	56	50	4.5	7.6	1440	60	10	16.90

## Accessories

### Pipe brackets

#### Geberit Silent-db20 pipe bracket, insulated, with threaded socket M10 / G 1/2"



click & scan

### Application purposes

- For anchor-point fastening of pipes in connection with double-sleeve coupling or expansion socket
- For sliding bracket fastening of pipes

### Characteristics

- Male thread
- Female thread
- Highly sound-insulating
- Outside zinc-plated


### Technical data

Product material	Steel
------------------	-------

Art. no.	DN	G ["]	M [mm]	di, ø [mm]	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.812.26.1	56	1/2	10	56	4.7	1600	50	10	1	6.44
306.812.26.1	60	1/2	10	63	5		50	10		7.74
307.812.26.1	70	1/2	10	75	5.7	1200	50	10	1	8.31
308.812.26.1	90	1/2	10	90	6.4	800	50	10	1	8.76
310.812.26.1	100	1/2	10	110	7.4	600	50	10	1	9.63
312.812.26.1	125	1/2	10	125	8.1	600	50	10	1	10.58
315.812.26.1	150	1/2	10	160	9.9	400	25	5	1	12.39



## Geberit Silent-db20 pipe bracket, insulated, with threaded socket G 1"

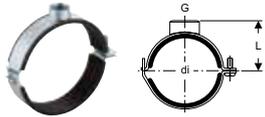

click & scan

### Application purposes

- For anchor-point fastening of pipes in connection with double-sleeve coupling or expansion socket
- For sliding bracket fastening of pipes

### Characteristics

- Female thread
- Highly sound-insulating
- Outside zinc-plated


### Technical data

Product material	Steel
------------------	-------

Art. no.	DN	G ["]	di, ø [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
315.813.26.1	150	1	178	12	10	1	30.68

## Fastenings for pipe brackets

### Geberit base plate, rectangular, two-hole, with threaded socket M10 / G 1/2"

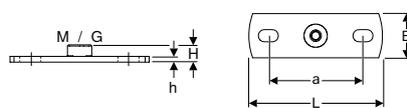

click & scan

### Application purposes

- For fastening pipe brackets to the building structure
- For anchor point and sliding bracket fastenings

### Characteristics


- Male thread
- Female thread
- Zinc-plated
- Two fastening points

### Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	M [mm]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
362.851.26.1	1/2	10	8.5	12	4	1.5	0.5	50	1	4.20

### Geberit base plate, rectangular, two-hole, with threaded socket G

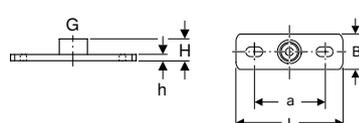

click & scan

### Application purposes

- For building drainage
- For fastening pipe brackets to the building structure
- For fastening pipes to ceilings and walls
- For anchor point and sliding bracket fastenings

### Characteristics

- Female thread
- Zinc-plated
- Two fastening points

### Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	a [cm]	L [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.828.26.1	1	9	12	4	2.6	0.6	1000	25	1	9.16

## Geberit threaded rod



click & scan

### Application purposes

- For fastening Geberit pipe brackets to base plates
- For building drainage
- For fastening Geberit Pluvia support rails to base plates
- For sliding bracket fastenings

### Characteristics

- Zinc-plated

### Scope of delivery


- Protective shell

### Technical data

Product material	Steel
------------------	-------

Art. no.	M [mm]	L [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.836.00.1	10	50	2000	10	1	6.56

## Geberit threaded pipe

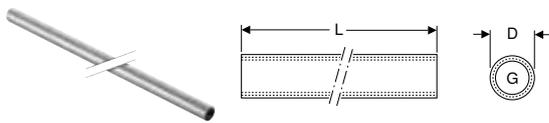

click & scan

### Application purposes

- For fastening Geberit pipe brackets to base plates
- For anchor point and sliding bracket fastenings

### Characteristics

- Female thread continuously threaded
- Zinc-plated

### Technical data

Product material	Steel
------------------	-------

Art. no.	G ["]	D [cm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.857.26.1	1/2	2.5	115	2	1	37.51

## Sealings

### Geberit Silent-db20 end cap



click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For creating pipeline terminations
- For welding and tensioning

### Characteristics


- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	L [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
305.005.14.1	56	56	3		10	1	3.92
307.005.14.1	70	75	3		10	1	4.67
308.005.14.1	90	90	3		10	1	8.06
310.005.14.1	100	110	3	1120	10	1	6.48

## Geberit Silent-db20 end cap, screwable

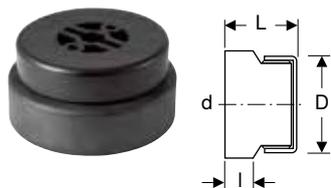

click & scan

### Application purposes

- For building drainage
- For buildings with increased sound insulation requirements
- For creating pipeline terminations
- For creating service openings
- For welding and tensioning

### Characteristics

- Abrasion resistant
- Highly sound-insulating
- UV-resistant

### Technical data

Storage temperature	≤ 40 °C
Product material	PE-S2
Thermal expansion	0.17 mm/(m·K)
Thermal conductivity, pipe	0.43 W/(m·K)

Art. no.	DN	d, ø [mm]	D [cm]	L [cm]	l [cm]	SU4 [pc.]	SU3 [pc.]	SU1 [pc.]	GBP/pc.
315.005.14.1	150	160	14.4	7.2	3.3	256	4	1	34.44

## Seals

### Geberit sleeve



click & scan

### Application purposes


- For bidets and washbasins

### Technical data

Product material	EPDM
------------------	------

Art. no.	d, ø [mm]	d1, ø [mm]	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
152.796.00.1	40	44	2.3	100	10	1	1	8.85
152.495.00.1	32	46	2.3	100	10	1	1	3.27
152.496.00.1	40	46	2.3	100	10	1	1	4.67
153.566.16.1	50	58	2.3	6400	100	10	1	8.85

### Geberit sleeve

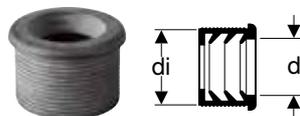

click & scan

### Application purposes

- For bidets and washbasins

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	di, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
152.682.00.1	50	32	44	100	10	1	5.64
152.689.00.1	56	32	50	100	10	1	8.85
152.690.00.1	56	40	50	100	10	1	9.20
152.691.00.1	60	32	57	100	10	1	9.41
152.692.00.1	60	40	57	100	10	1	9.41
152.693.00.1	60	50	57	100	10	1	9.69

## Consumables

### Geberit lubricant, 250 ml



[click & scan](#)

#### Application purposes

- For lubricating the seals of push-fit connections
- For building drainage

Art. no.	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
953.761.00.1	780	10	1	6.21

### Geberit grease pencil with retractable lead



[click & scan](#)

#### Application purposes

- For marking on Geberit pipes

#### Characteristics

- Pressure pin with convenient one-hand operation
- Lead retractable for protection after use
- Water-soluble
- Washable from smooth surfaces
- UV-resistant

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.102.00.1	yellow	25	1	25.60

#### Accessories

- Geberit spare leads for grease pencil with retractable lead → p. 66

### Geberit spare leads for grease pencil with retractable lead



[click & scan](#)

#### Characteristics

- Water-soluble
- Washable from smooth surfaces
- UV-resistant

#### Scope of delivery

- Box with 12 spare leads

Art. no.	Colour / surface	SU3 [pc.]	SU1 [pc.]	GBP/pc.
690.103.00.1	yellow	25	1	25.60





# Geberit Silent-PP



<b>Preliminary remarks</b> .....	<b>101</b>
<b>Pipes</b> .....	<b>102</b>
<b>Fittings</b> .....	<b>104</b>
Bends .....	104
Branch fittings .....	105
Reducers.....	110
Access pipes.....	112
<b>Connections</b> .....	<b>113</b>
Push-in connections .....	113
Claw connections .....	114
Adaptors to other product materials.....	115
<b>Waste Fittings</b> .....	<b>116</b>
Connection bends .....	116
Straight connectors.....	118
<b>Accessories</b> .....	<b>119</b>
Pipe brackets .....	119
Sealings.....	120
Seals.....	120
Protective caps .....	122
Consumables .....	122



# Preliminary remarks

## Introduction to Geberit Silent-PP

Geberit Silent-PP is the perfect commercial soil & waste and drainage system. With robust pipes, available and domestic in common diameters, from 32 mm to 160 mm, and a comprehensive range of fittings and to suit most installations.

Whether it be in a residential complex, a hotel or in a meeting room, noisy discharge pipes are annoying - a problem that is easily eliminated with the Geberit Silent-PP waste and drainage system. These pipes and fittings, optimised as they are with respect to sound insulation and hydraulics, are suitable for both discharge stacks and floor connections and ensure quiet and effective drainage in every kind of building.

## Benefits of Geberit Silent-PP

### Award winning pushfit design

Geberit Silent-PP is a design award winning pushfit drainage system offering very simple and fast assembly: Just push the components together and rotate to align them. In addition to its low-noise, optimised wastewater volume flow, the new concept is characterized by several design elements: The reference nubs and stop ring take the guess work out of aligning the fittings properly and getting the correct insertion depth. The four laterally extending ribs serve to create a good grip when inserting one fitting into another. The flattened ridge along the direction of flow highlights the product brand and item details to help with identification later.

### Effective sound insulation

Geberit Silent-PP is made from mineral-reinforced polypropylene, improving the physical properties of the material and achieving acoustics optimisation, effectively reducing the natural vibrations and noise.

### Clean installation

No chemicals used in the installation process

### Chemical resistant

Resistant to a wide range of chemicals

### Temperature and UV resistant

Robustly resistant to hot and cold temperatures and UV light

### Impact resistant

Flexible materials absorb impact

### Experienced

More than 60 years of practical experience in drainage technology

## Always consider

When fitting an acoustic installation, it is not just the drainage system which needs careful consideration. Try to have as few offsets as possible to reduce the amount of impact zones, thus decreasing the sound. If an offset is necessary, use 2x 45degree bends instead.

Ensure you decouple the whole installation away from the construction of the building. Use rubber lined brackets to absorb the vibrations, as well as sound insulation for pipes coming into contact with the walls and floors.

## Technical support

Available to answer your email & telephone enquiries. Our Specification team can take plan drawings, schematics and any other relevant installation information and they will create a take-off for your project free of charge.

If you would like to use this service, please email [specification.gb@geberit.com](mailto:specification.gb@geberit.com)

If you require any technical assistance, please contact the technical department on 01926 516800, or email [technical@geberit.co.uk](mailto:technical@geberit.co.uk).




product  
design  
award

2009



## Pipes

### Geberit Silent-PP pipe with one socket

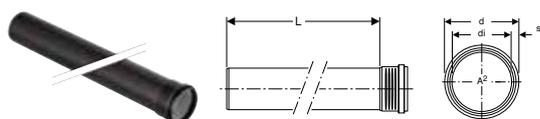

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Technical data


Installation temperature	-10 – +40 °C
Product material	PP-C / PP-MD / PP-C
Thermal expansion	0.08 mm/(m·K)

#### Characteristics

- Acoustically optimised
- Three-layer pipe
- Pipe, white interior
- Seal made of EPDM
- Suitable for being stored outside for two years

Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	A <sup>2</sup> [cm <sup>2</sup> ]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
<b>L / length: 100 cm</b>									
390.004.14.1	30	32	28	2	6.2	650	10		7.54
390.104.14.1	40	40	36	2	10.2	400	10		7.55
390.204.14.1	50	50	46	2	16.6	240	10		7.67
390.304.14.1	70	75	69.8	2.6	38.3	144	8	1	13.20
390.404.14.1	90	90	83.8	3.1	55.2	90	6		19.83
390.504.14.1	100	110	102.8	3.6	83	64	4		22.31
390.604.14.1	125	125	116.6	4.2	106.8	48	4		32.82
390.704.14.1	150	160	149.6	5.2	175.8	36	4	1	49.09
<b>L / length: 150 cm</b>									
390.005.14.1	30	32	28	2	6.2	650	10		12.41
390.105.14.1	40	40	36	2	10.2	400	10		12.45
390.205.14.1	50	50	46	2	16.6	240	10		12.68
390.305.14.1	70	75	69.8	2.6	38.3	144	8		19.44
390.405.14.1	90	90	83.8	3.1	55.2	90	6		27.77
390.505.14.1	100	110	102.8	3.6	83	64	4		31.16
390.605.14.1	125	125	116.6	4.2	106.8	48	4		44.53
390.705.14.1	150	160	149.6	5.2	175.8	36	4		67.13
<b>L / length: 200 cm</b>									
390.006.14.1	30	32	28	2	6.2	650	10		15.13
390.106.14.1	40	40	36	2	10.2	400	10		15.24
390.206.14.1	50	50	46	2	16.6	240	10		16.43
390.306.14.1	70	75	69.8	2.6	38.3	144	8		25.52
390.406.14.1	90	90	83.8	3.1	55.2	90	6		37.36
390.506.14.1	100	110	102.8	3.6	83	64	4		41.90
390.606.14.1	125	125	116.6	4.2	106.8	48	4		60.72
390.706.14.1	150	160	149.6	5.2	175.8	36	4		91.20
<b>L / length: 300 cm</b>									
390.007.14.1	30	32	28	2	6.2	650	10		21.21
390.107.14.1	40	40	36	2	10.2	400	10		21.85
390.207.14.1	50	50	46	2	16.6	240	10		25.36
390.307.14.1	70	75	69.8	2.6	38.3	144	8		37.69
390.407.14.1	90	90	83.8	3.1	55.2	90	6		53.55
390.507.14.1	100	110	102.8	3.6	83	64	4		60.21
390.607.14.1	125	125	116.6	4.2	106.8	48	4		84.73
390.707.14.1	150	160	149.6	5.2	175.8	36	4		129.79

## Geberit Silent-PP pipe with two sockets

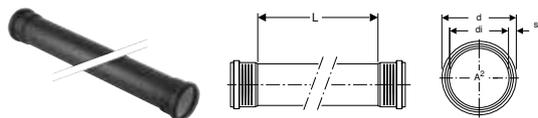

click & scan

### Application purposes

- For draining off waste water within buildings

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-C / PP-MD / PP-C
Thermal expansion	0.08 mm/(m·K)

### Characteristics

- Acoustically optimised
- Three-layer pipe
- Pipe, white interior
- Seal made of EPDM
- Suitable for being stored outside for two years


Art. no.	DN	d, ø [mm]	di, ø [mm]	s [mm]	A² [cm²]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
<b>L / length: 200 cm</b>								
390.013.14.1	30	32	28	2	6.2	650	10	18.17
390.113.14.1	40	40	36	2	10.2	400	10	18.33
390.213.14.1	50	50	46	2	16.6	240	10	20.35
390.313.14.1	70	75	69.8	2.6	38.3	144	8	30.63
390.413.14.1	90	90	83.8	3.1	55.2	90	6	42.52
390.513.14.1	100	110	102.8	3.6	83	64	4	51.25
390.613.14.1	125	125	116.6	4.2	106.8	48	4	81.99
<b>L / length: 300 cm</b>								
390.014.14.1	30	32	28	2	6.2	650	10	25.42
390.114.14.1	40	40	36	2	10.2	400	10	28.61
390.214.14.1	50	50	46	2	16.6	240	10	31.55
390.314.14.1	70	75	69.8	2.6	38.3	144	8	44.53
390.414.14.1	90	90	83.8	3.1	55.2	90	6	61.22
390.514.14.1	100	110	102.8	3.6	83	64	4	73.78
390.614.14.1	125	125	116.6	4.2	106.8	48	4	114.24



## Fittings

### Bends

#### Geberit Silent-PP bend



click & scan

#### Application purposes

- For draining off waste water within buildings

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)


#### Characteristics

- Acoustically optimised
- Seal made of EPDM

Art. no.	DN	d, ø [mm]	X [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
<b>arc / angle: 15°</b>									
390.020.14.1	30	32	5	0.6	1	2000	50	10	3.25
390.120.14.1	40	40	5.4	0.7	1.1	1200	50	10	3.30
390.220.14.1	50	50	5.8	0.7	1.1	1200	100	10	4.21
390.320.14.1	70	75	6.5	0.9	1.5	400	50	10	6.55
390.420.14.1	90	90	7.3	1.2	1.7	320	40	10	9.24
390.520.14.1	100	110	8.2	1.4	2	160	40	10	10.04
390.620.14.1	125	125	8.8	1.4	2.3	120		10	19.22
390.720.14.1	150	160	9.7	1.7	2.6	60		5	29.86
<b>arc / angle: 30°</b>									
390.021.14.1	30	32	5.2	0.8	0.9	2000	50	10	3.25
390.121.14.1	40	40	5.7	0.9	1	1200	50	10	3.30
390.221.14.1	50	50	6.2	1.1	1	1200	100	10	3.83
390.321.14.1	70	75	7	1.5	1.5	400	50	10	6.55
390.421.14.1	90	90	7.9	1.8	1.7	320	40	10	9.24
390.521.14.1	100	110	9	2.1	2.2	160	40	10	10.04
390.621.14.1	125	125	9.8	2.4	2.5	120		10	19.22
390.721.14.1	150	160	11	3	2.8	60		5	29.86
<b>arc / angle: 45°</b>									
390.022.14.1	30	32	5.5	1	1.1	2000	50	10	2.88
390.122.14.1	40	40	6	1.2	1.3	1200	50	10	2.93
390.222.14.1	50	50	6.5	1.5	1.4	1200	100	10	3.34
390.322.14.1	70	75	7.6	2	2.1	400	100	10	6.26
390.422.14.1	90	90	8.5	2.4	2.5	320	40	10	8.59
390.522.14.1	100	110	9.7	3	2.9	160	40	10	8.50
390.622.14.1	125	125	10.7	3.3	3.3	120		10	19.22
390.722.14.1	150	160	12.2	4.2	4	60		5	29.86
<b>arc / angle: 67.5°</b>									
390.023.14.1	30	32	5.9	1.5	1.5	2000	50	10	3.58
390.123.14.1	40	40	6.5	1.8	1.8	1200	50	10	3.66
390.223.14.1	50	50	7.2	2.1	2.1	1200	100	10	5.08
390.323.14.1	70	75	8.6	3	3	400	50	10	8.83
390.423.14.1	90	90	9.7	3.6	3.5	200	50	10	9.87
390.523.14.1	100	110	11.2	4.4	4.3	160	40	10	10.79
390.623.14.1	125	125	12.3	4.9	4.9	80		10	28.00
390.723.14.1	150	160	14.3	6.2	6.1			5	46.40
<b>arc / angle: 87.5°</b>									
390.024.14.1	30	32	6.4	1.9	2	2000	50	10	3.19
390.124.14.1	40	40	7.1	2.3	2.5	1200	50	10	3.30
390.224.14.1	50	50	7.9	2.8	3	1200	100	10	4.21
390.324.14.1	70	75	9.7	4.1	4.2	400	50	10	8.63
390.424.14.1	90	90	11	4.9	4.8	200	50	10	9.24
390.524.14.1	100	110	12.8	6	6	160	40	10	9.82
390.624.14.1	125	125	14.2	6.8	6.7	80		10	28.00
390.724.14.1	150	160	16.6	8.5	8.4	40		5	46.40

## Branch fittings

### Geberit Silent-PP branch fitting 45°

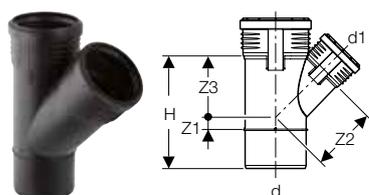

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Characteristics


- Acoustically optimised
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.030.14.1	30 / 30	32	32	45	9.4	1	4	4	1200	50	10		6.65
390.130.14.1	40 / 30	40	32	45	9.7	0.6	4.6	4.4	800	50	10		6.81
390.131.14.1	40 / 40	40	40	45	9.8	1.2	5	5	800	50	10		6.88
390.230.14.1	50 / 30	50	32	45	10	0.1	5.3	4.9	480	60	10		8.23
390.231.14.1	50 / 40	50	40	45	10.2	0.7	5.8	5.6	480	60	10		8.63
390.232.14.1	50 / 50	50	50	45	12.7	1	6.3	6.3	480	60	10		7.71
390.331.14.1	70 / 40	75	40	45	12	0.6	7.6	7	200	25	5		11.93
390.332.14.1	70 / 50	75	50	45	13.4	0.1	8.1	7.6	200	25	5		10.87
390.333.14.1	70 / 70	75	75	45	15	1.9	9.4	9.4	200	25	5		11.93
390.432.14.1	90 / 50	90	50	45	13	0.6	9.1	8.4	200	50	10		17.96
390.433.14.1	90 / 70	90	75	45	17.5	1.2	10.4	10.2	120	30	10		18.52
390.434.14.1	90 / 90	90	90	45	19.6	2.2	11.3	11.3	120	30	10		18.29
390.531.14.1	100 / 40	110	40	45	13.4	2.2	10.1	8.8	120	30	5		20.13
390.532.14.1	100 / 50	110	50	45	14.8	1.5	10.6	9.5	120	30	5		19.58
390.533.14.1	100 / 70	110	75	45	18.3	0.2	11.9	11.2	80		10		20.13
390.534.14.1	100 / 90	110	90	45	20.3	1.3	12.6	12.2	80		10		19.86
390.535.14.1	100 / 100	110	110	45	23.3	2.7	13.8	13.8	80		10		18.84
390.634.14.1	125 / 90	125	90	45	21	0.6	13.6	12.9	80		10	1	45.85
390.635.14.1	125 / 100	125	110	45	23.7	2.1	14.7	14.3	40		10	1	45.85
390.636.14.1	125 / 125	125	125	45	25.9	3.1	15.4	15.4	40		10	1	69.17
390.735.14.1	150 / 100	160	110	45	24.5	0.4	17.2	16.1	40		5	1	71.48
390.736.14.1	150 / 125	160	125	45	26.6	1.4	17.9	17.1	40		5	1	94.56
390.737.14.1	150 / 150	160	160	45	31.5	3.9	19.6	19.5	20		5	1	107.78

### Geberit Silent-PP double branch fitting 45°

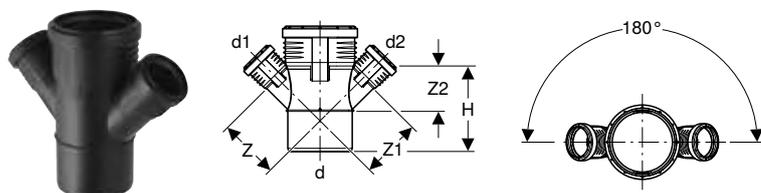

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Characteristics


- Acoustically optimised
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
390.469.14.1	90 / 50 / 50	90	50	50	45	13.9	9.1	9.1	8.4	120	10	33.81
390.569.14.1	100 / 50 / 50	110	50	50	45	14.8	10.6	10.6	9.5	80	10	33.81

## Geberit Silent-PP branch fitting swept entry 87.5°

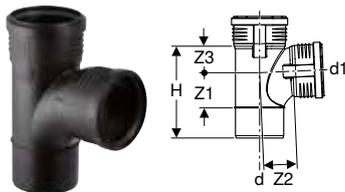

click & scan

### Application purposes

- For draining off waste water within buildings

### Technical data


Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

### Characteristics

- Acoustically optimised
- Swept entry
- Seal made of EPDM

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.454.14.1	90 / 90	90	90	87.5	17.7	6.7	7	4.9	120	30	10	19.22
390.554.14.1	100 / 90	110	90	87.5	18.6	6.8	8.1	5	80		10	19.50
390.555.14.1	100 / 100	110	110	87.5	21.2	8.2	7.7	6.1	80		10	19.50

## Geberit Silent-PP branch fitting 87.5°

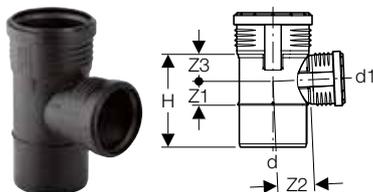

click & scan

### Application purposes

- For draining off waste water within buildings

### Technical data


Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

### Characteristics

- Acoustically optimised
- Seal made of EPDM

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.046.14.1	30 / 30	32	32	87.5	8.2	1.7	2.1	2.1	1200	50	10		6.65
390.147.14.1	40 / 40	40	40	87.5	9.2	2.2	2.2	2.2	800	50	10		6.88
390.247.14.1	50 / 40	50	40	87.5	9.5	2.2	2.8	2.2	480	60	10		8.63
390.248.14.1	50 / 50	50	50	87.5	10.5	2.7	2.8	2.8	480	60	10		8.63
390.347.14.1	70 / 40	75	40	87.5	10.4	2.3	4.2	2.6	200	25	5		11.93
390.348.14.1	70 / 50	75	50	87.5	11.4	2.8	4.2	3.1	300	25	5		11.93
390.349.14.1	70 / 70	75	75	87.5	13.9	4	4.3	4.3	200	25	5		11.93
390.448.14.1	90 / 50	90	50	87.5	12.1	2.8	4.9	3.2	200	50	10		18.29
390.449.14.1	90 / 70	90	75	87.5	14.6	4	5.1	4.5	160	40	10		18.52
390.547.14.1	100 / 40	110	40	87.5	12.4	2.7	6	2.9	120	30	5		19.86
390.548.14.1	100 / 50	110	50	87.5	12.9	2.8	6	3.2	120	30	5		19.86
390.549.14.1	100 / 70	110	75	87.5	15.4	4	6.1	4.5	120	30	5		20.13
390.650.14.1	125 / 90	125	90	87.5	17.1	4.6	6.9	5.2	80		10	1	45.85
390.651.14.1	125 / 100	125	110	87.5	21.3	6.6	7.8	7.3	80		10	1	45.85
390.652.14.1	125 / 125	125	125	87.5	20.6	6.4	6.8	6.8	80		10		69.17
390.751.14.1	150 / 100	160	110	87.5	19.8	5.5	8.8	6.2	40		5	1	71.48
390.752.14.1	150 / 125	160	125	87.5	21.3	6.4	8.7	6.9	40		5	1	94.56
390.753.14.1	150 / 150	160	160	87.5	24.8	8.2	8.6	8.6	40		5	1	107.78

### Geberit Silent-PP double branch fitting 87.5°, swept-entry

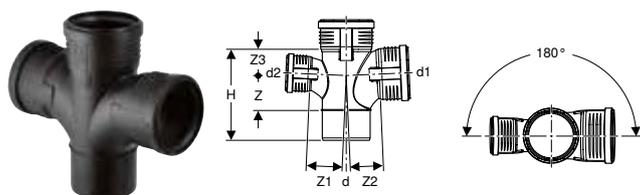

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Characteristics


- Acoustically optimised
- Swept entry
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.466.14.1	90 / 90 / 90	90	90	90	87.5	17.7	6.7	7	7	4.9	80	10	1	82.05
390.567.14.1	100 / 100 / 70	110	110	75	87.5	21.2	8.2	8.3	7.7	6.1	80	10	1	87.06
390.566.14.1	100 / 100 / 100	110	110	110	87.5	21.2	8.2	7.7	7.7	6.1	80	10	1	87.06

### Geberit Silent-PP double branch fitting 87.5°

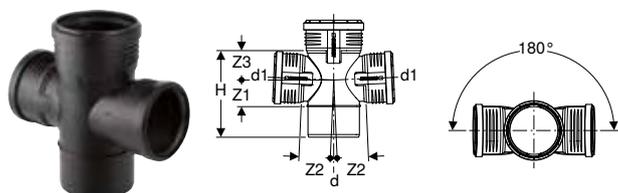

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Characteristics


- Acoustically optimised
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.665.14.1	125 / 100 / 100	125	110	87.5	21.3	6.6	7.8	7.3	36	3	1	62.18

### Geberit Silent-PP corner branch fitting 87.5°

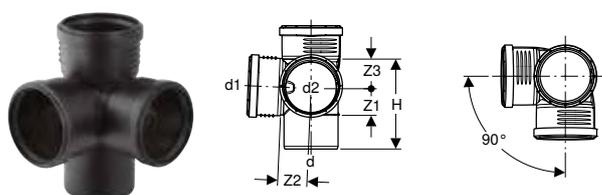

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Characteristics


- Acoustically optimised
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.459.14.1	90 / 90 / 90	90	90	90	87.5	15.7	4.6	5	5	80	10	1	78.56
390.559.14.1	100 / 100 / 100	110	110	110	87.5	18.6	5.6	6	6.1	80	10	1	90.36
390.662.14.1	125 / 100 / 100	125	110	110	87.5	21.3	6.6	7.8	7.3	36	3	1	97.87

### Geberit Silent-PP combined branch fitting 87.5°, swept-entry

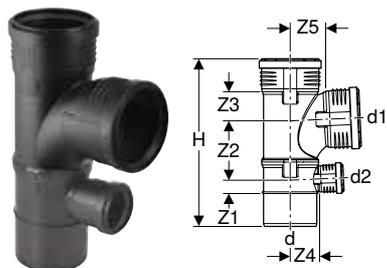

click & scan

#### Application purposes

- For draining off waste water within buildings
- For connecting low-lying drains on shower elements

#### Characteristics


- Acoustically optimised
- Swept entry
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.456.14.1	90 / 90 / 50	90	90	50	87.5	30.6	2.8	10.7	4.9	4.9	7	60	5	1	85.09
390.556.14.1	100 / 90 / 50	110	90	50	87.5	32.4	2.8	10.9	5	6	8.1	60	5	1	92.03
390.558.14.1	100 / 100 / 50	110	110	50	87.5	35	2.8	12.4	6.1	6	7.7	60	5	1	92.03

### Geberit Silent-PP combined corner branch fitting 87.5°, swept-entry, left

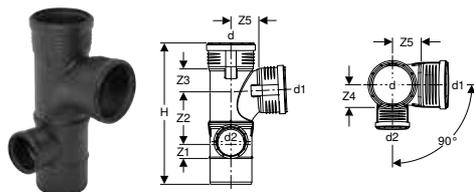

click & scan

#### Application purposes

- For draining off waste water within buildings
- For connecting low-lying drains on shower elements

#### Characteristics


- Acoustically optimised
- Swept entry
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.470.14.1	90 / 90 / 50	90	90	50	87.5	30.6	3.2	10.9	5.2	4.9	6.7	60	5	1	85.09
390.570.14.1	100 / 90 / 50	110	90	50	87.5	32.4	3.3	11.1	5.4	5.9	7.8	60	5	1	92.03
390.578.14.1	100 / 100 / 50	110	110	50	87.5	35	3.3	12.6	6.5	5.9	7.4	60	5	1	92.03
390.561.14.1	100 / 100 / 70	110	110	75	87.5	37.5	4.2	13.8	6.5	6	7.8	60	5	1	92.03

## Geberit Silent-PP combined corner branch fitting 87.5°, swept-entry, right

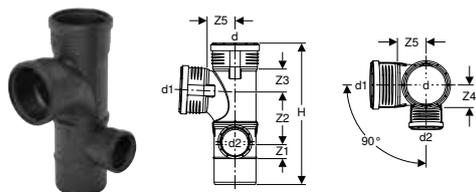

click & scan

### Application purposes

- For draining off waste water within buildings
- For connecting low-lying drains on shower elements

### Characteristics


- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.462.14.1	90 / 90 / 50	90	90	50	87.5	30.6	3.2	10.9	5.2	4.9	6.7	60	5	1	85.09
390.562.14.1	100 / 90 / 50	110	90	50	87.5	32.4	3.3	11.1	5.4	5.9	7.8	60	5	1	92.03
390.565.14.1	100 / 100 / 50	110	110	50	87.5	35	3.3	12.6	6.5	5.9	7.4	60	5	1	92.03
390.560.14.1	100 / 100 / 70	110	110	75	87.5	37.5	4.2	13.8	6.5	6	7.8	60	5	1	92.03

## Geberit Silent-PP duct branch fitting 87.5°, swept-entry, left

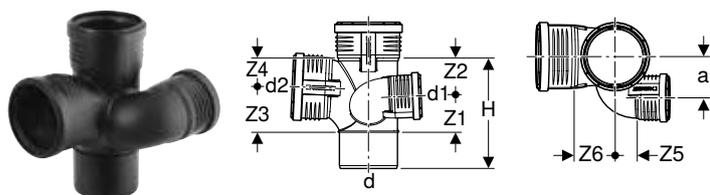

click & scan

### Application purposes

- For draining off waste water within buildings

### Characteristics


- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	a [cm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	Z6 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.464.14.1	90 / 70 / 90	90	75	90	87.5	8.2	17.6	6.3	5.3	6.7	4.9	3.5	6.9	40	5	1	116.38
390.564.14.1	100 / 70 / 100	110	75	110	87.5	9.2	21.1	6.7	7.6	8.2	6.1	4.4	7.7	40	5	1	134.79

## Geberit Silent-PP duct branch fitting 87.5°, swept-entry, right

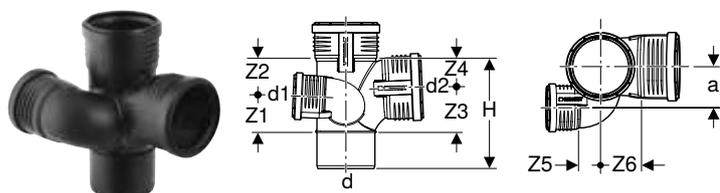

click & scan

### Application purposes

- For draining off waste water within buildings

### Characteristics


- Acoustically optimised
- Swept entry
- Seal made of EPDM

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	a [cm]	H [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	Z4 [cm]	Z5 [cm]	Z6 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.463.14.1	90 / 70 / 90	90	75	90	87.5	8.2	17.6	6.3	5.3	6.7	4.9	3.5	6.9	40	5	1	116.38
390.563.14.1	100 / 70 / 100	110	75	110	87.5	9.2	21.1	6.7	7.6	8.2	6.1	4.4	7.7	40	5	1	134.79

## Geberit Silent-PP parallel branch fitting 45°

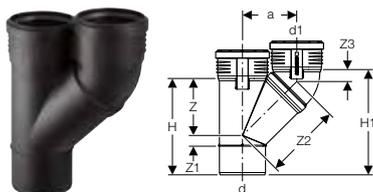

click & scan

### Application purposes

- For draining off waste water within buildings

### Characteristics

- Acoustically optimised
- Seal made of EPDM


### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	a [cm]	H [cm]	H1 [cm]	Z [cm]	Z1 [cm]	Z2 [cm]	Z3 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.457.14.1	90 / 90	90	90	45	11	19.6	21.4	11.3	2.2	15	2.5	80	10	1	75.63
390.557.14.1	100 / 100	110	110	45	13	23.3	25.5	13.8	2.7	18.4	2.9	80	10	1	75.63

## Reducers

### Geberit Silent-PP reducer, eccentric, short

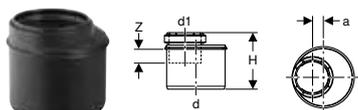

click & scan

### Application purposes

- For draining off waste water within buildings

### Characteristics


- Eccentric
- Acoustically optimised
- Seal made of EPDM

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	a [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.373.14.1	70 / 50	75	50	1	8.4	2.3	600	50	10	1	6.32
390.474.14.1	90 / 50	90	50	1.7	8.8	2.4	600	50	10	1	8.59
390.475.14.1	90 / 70	90	75	0.4	8.9	2.8	600	50	10	1	8.59
390.575.14.1	100 / 50	110	50	2.6	9.5	2.4	400	50	10	1	8.78
390.576.14.1	100 / 70	110	75	1.4	9.6	2.9	400	50	10	1	9.24
390.577.14.1	100 / 90	110	90	0.6	9.8	3.2	400	50	10	1	10.04

### Geberit Silent-PP reducer, eccentric

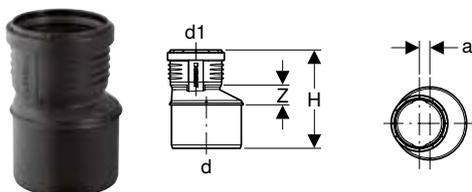

click & scan

### Application purposes

- For draining off waste water within buildings

### Characteristics

- Eccentric
- Acoustically optimised
- Seal made of EPDM

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	a [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.271.14.1	50 / 40	50	40	0.5	11.4	1.6	800	100	10		4.96
390.279.14.1	50 / 30	50	32	0.9	11.3	1.9	800	100	10		4.89
390.372.14.1	70 / 50	75	50	1.2	13.3	2.6	800	50	10		6.32

Art. no.	DN	d, ø [mm]	d1, ø [mm]	a [cm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.471.14.1	90 / 40	90	40	2.4	14.6	3.8	600	50	10		8.59
390.472.14.1	90 / 50	90	50	1.9	14.6	3.4	600	50	10		8.59
390.473.14.1	90 / 70	90	75	0.7	13.9	2.2	400	50	10		8.59
390.571.14.1	100 / 40	110	40	3.3	16.4	4.9	400	50	10		9.24
390.572.14.1	100 / 50	110	50	2.8	16.4	4.5	320	40	10		8.78
390.573.14.1	100 / 70	110	75	1.7	15.7	3.3	400	50	10		9.24
390.574.14.1	100 / 90	110	90	1	15.7	2.7	200	50	10		10.04
390.675.14.1	125 / 100	125	110	0.7	17.1	2.9	120		10		16.87
390.775.14.1	150 / 100	160	110	2.3	19.4	4.5	80		5	1	25.24
390.776.14.1	150 / 125	160	125	1.7	19.4	4	80		5	1	25.24

## Geberit Silent-PP reducer, concentric, short



click & scan

### Application purposes

- For draining off waste water within buildings

### Technical data


Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

### Characteristics

- Concentric
- Acoustically optimised
- Seal made of EPDM

Art. no.	DN	d, ø [mm]	d1, ø [mm]	E [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.179.14.1	40 / 30	40	32	5	6.8	2000	50	10	5.06
390.278.14.1	50 / 40	50	40	5.2	6.8	2400	100	10	4.86

## Geberit Silent-PP reducing bend 87.5°

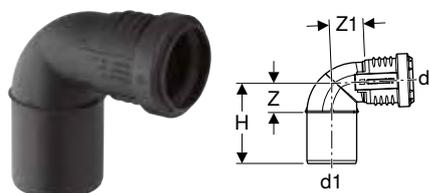

click & scan

### Application purposes

- For draining off waste water within buildings

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

### Characteristics

- Acoustically optimised
- Seal made of EPDM


Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	Z [cm]	Z1 [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.225.14.1	40 / 50	40	50	87.5	8.1	3.1	3.5	800	50	10	4.21



- Art. no. 390.325.14.1 is a welded fitting

## Access pipes

### Geberit Silent-PP access pipe 90° with round service opening



click & scan

#### Application purposes

- For draining off waste water within buildings
- For horizontal installation
- For vertical installation

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

#### Characteristics


- Acoustically optimised
- Service opening with simplified cover guide
- Flow-optimised cap
- Cap flush with pipe
- Seal made of EPDM

#### Scope of delivery

- Cover made of PP

Art. no.	DN	d, ø [mm]	arc [°]	L [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.227.14.1	50	50	90	4.7	12.3	400	50	10		15.41
390.327.14.1	70	75	90	6.1	15.4	240	30	5		19.22
390.427.14.1	90	90	90	7.4	17.7	80		10		26.11
390.527.14.1	100	110	90	9	21	80		10		28.36
390.627.14.1	125	125	90	9.8	21.5	80		10	1	56.53
390.727.14.1	150	160	90	11.6	22.2	40		5	1	86.68

### Geberit Silent-PP access pipe 90° with oval service opening

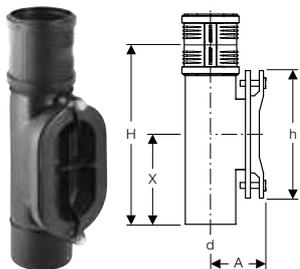

click & scan

#### Application purposes

- For draining off waste water within buildings
- For horizontal installation
- For vertical installation

#### Technical data

Product material	PP-MD
------------------	-------

#### Characteristics

- Acoustically optimised
- Oval opening
- Seal made of EPDM

#### Scope of delivery


- Cover, grey cast iron, dip-coated black
- Double ring seal socket made of PP, with lip seals

Art. no.	DN	d, ø [mm]	arc [°]	A [cm]	H [cm]	h [cm]	X [cm]	SU1 [pc.]	GBP/pc.
390.503.14.1	100	110	90	12	40.3	28	20	1	277.27
390.603.14.1	125	125	90	12.5	41.4	28	20.5	1	346.62
390.703.14.1	150	160	90	14	43.4	28	21.5	1	392.82

# Connections

## Push-in connections

### Geberit Silent-PP long socket

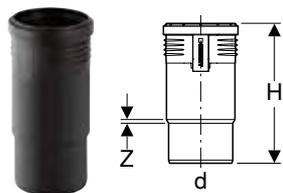

click & scan

#### Application purposes

- For draining off waste water within buildings
- For repairing damaged Geberit Silent-PP pipes

#### Characteristics


- Acoustically optimised
- With expansion compensation
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.118.14.1	40	40	16.8	0.1	800	50	10	5.08
390.218.14.1	50	50	18.1	0.3	800	50	10	6.68
390.318.14.1	70	75	19.8	0.6	240	30	5	9.49
390.418.14.1	90	90	21.7	0.3	240	30	5	14.20
390.518.14.1	100	110	24.2	0.5	120	30	5	15.41
390.618.14.1	125	125	26.5	0.6	120		10	20.71
390.718.14.1	150	160	29	0.6	40		5	38.56

### Geberit Silent-PP double ring seal socket



click & scan

#### Application purposes

- For draining off waste water within buildings

#### Characteristics


- Acoustically optimised
- Seal made of EPDM

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.016.14.1	30	32	9	0.1	2000	50	10		4.59
390.116.14.1	40	40	9.6	0.1	1200	50	10		4.68
390.216.14.1	50	50	10.3	0.1	800	50	10	1	4.83
390.316.14.1	70	75	11.3	0.2	400	50	10		6.55
390.416.14.1	90	90	12.4	0.2	240	30	10		10.40
390.516.14.1	100	110	13.9	0.3	240	30	5		11.20
390.616.14.1	125	125	15.2	0.4	120		10		21.05
390.716.14.1	150	160	16.5	0.4	60		5		31.53

## Geberit Silent-PP slip coupling



click & scan

### Application purposes

- For draining off waste water within buildings
- For repairing damaged Geberit Silent-PP pipes

### Characteristics

- Acoustically optimised
- Seal made of EPDM


### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.017.14.1	30	32	9	2000	50	10	4.59
390.117.14.1	40	40	9.6	1200	50	10	4.68
390.217.14.1	50	50	10.3	800	50	10	4.83
390.317.14.1	70	75	11.3	400	50	10	6.55
390.417.14.1	90	90	12.4	400	50	10	10.40
390.517.14.1	100	110	13.9	240	30	5	11.20
390.617.14.1	125	125	15.2	120		10	21.05
390.717.14.1	150	160	16.5	60		5	31.53

## Claw connections

### Geberit retaining claw

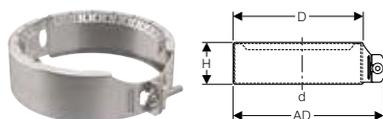

click & scan

### Application purposes

- For Geberit Silent-PP
- For rainwater pipes
- For creating lengthways locked push-in connections
- For building drainage

### Characteristics

- Can be retrofitted
- Removable


### Technical data

Internal pressure max.	2 bar
Product material	CrNi steel 1.4301 (EN 10088)

Art. no.	DN	d, ø [mm]	AD [cm]	D [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.008.14.1	30	32	5.7	4.5	3.3		10	1	6.62
390.108.14.1	40	40	6.9	5.7	3.5		10	1	7.99
390.203.14.1	50	50	8.2	7	3.8		10	1	9.24
390.308.14.1	70	75	10.9	9.6	3.7		10	1	11.05
390.408.14.1	90	90	12.6	11.3	4.1		10	1	12.37
390.508.14.1	100	110	14.7	13.5	4.1		10	1	19.86
390.608.14.1	125	125	16.5	15.2	4.5		10	1	26.09
390.708.14.1	150	160	20.6	19.3	5	24	4	1	34.91

## Adaptors to other product materials

### Geberit adaptor sleeve to cast iron

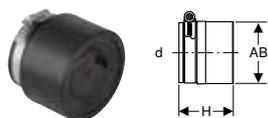

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Characteristics

- Acoustically optimised

#### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	AB [mm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.295.14.1	40 / 50	58	40-56	6.3		10	1	6.51
390.395.14.1	56 / 70	78	56-75	7.7		10	1	8.50
390.495.14.1	70 / 80 / 90	83	75-90	7.7		20	1	9.67
390.595.14.1	100	110	104-110	9.5		20	1	17.23
390.695.14.1	125	135	125	10.3	360	10	1	25.82

### Geberit adaptor sleeve to cast iron



click & scan

#### Application purposes


- For floor-standing WCs

#### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	d1, ø [mm]	L [cm]	SU1 [pc.]	GBP/pc.
367.009.16.1	90 / 100	90	110	6.7	1	35.38

### Geberit adaptor socket to Geberit Silent-db20

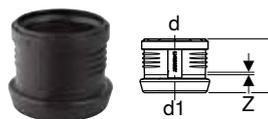

click & scan

#### Application purposes

- For draining off waste water within buildings
- For transitions from Geberit Silent-PP or Geberit Silent-Pro to Geberit Silent-db20 or to Geberit PE
- For transitions from Geberit Silent-db20 or Geberit PE to Geberit Silent-PP or to Geberit Silent-Pro

#### Characteristics

- Acoustically optimised
- With lip seal made of EPDM
- Claw ring made of chrome nickel steel

#### Technical data

Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	d1, ø [mm]	H [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.296.14.1	50 / 56	50	56	8.7	0.3	640	40	10		9.37
390.396.14.1	70 / 70	75	75	9.2	0.3	400	50	10		13.83
390.496.14.1	90 / 90	90	90	9.7	0.3	400	50	10		15.31
390.596.14.1	100 / 100	110	110	10.4	0.3	240	30	5		15.75
390.796.14.1	150 / 150	160	160	13.6	0.4	80		5	1	100.90




- Also for transitions from Geberit Silent-PP to Geberit HDPE

## Waste Fittings

### Connection bends

#### Geberit Silent-PP connection bend 90°

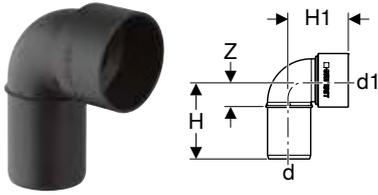

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

#### Characteristics

- Acoustically optimised

#### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.083.14.1	30	32	46	90	7.1	5.1	2.6	1200	50	10	8.14
390.183.14.1	40	40	46	90	7.4	5.5	2.6	1200	50	10	5.67
390.283.14.1	50	50	46	90	8.2	5.7	3.2	800	100	10	5.67
390.284.14.1	50	50	58	90	8.3	5.9	3.2	800	100	10	5.67


#### To order additionally

- Sleeve

#### Accessories

- Geberit sleeve → p. 61
- Geberit sleeve → p. 61

#### Geberit Silent-PP connection bend 90°, long

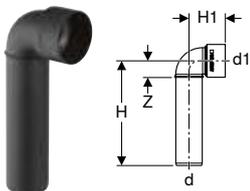

click & scan

#### Application purposes

- For draining off waste water within buildings

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

#### Characteristics

- Acoustically optimised

#### Scope of delivery

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.186.14.1	40	40	46	90	16	5.5	11.3	800	100	10	5.96


#### To order additionally

- Sleeve

#### Accessories

- Geberit sleeve → p. 61

## Geberit Silent-PP connection bend 90°, extended

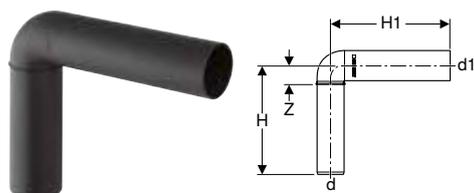

click & scan

### Application purposes

- For draining off waste water within buildings

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

### Scope of delivery


- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	arc [°]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
390.286.14.1	50	50	46	90	16	20	10.9	240	20	5.96
390.287.14.1	50	50	58	90	16	20	10.9		20	5.96

### Accessories

- Geberit sleeve → p. 61
- Geberit sleeve → p. 61

## Geberit Silent-PP double connection bend 90°, extended

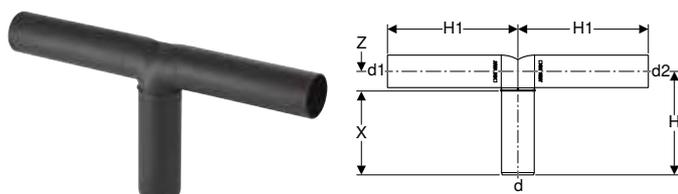

click & scan

### Application purposes

- For draining off waste water within buildings

### Characteristics

- Acoustically optimised

### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

### Scope of delivery


- 2 protective caps

Art. no.	DN	d, ø [mm]	d1, ø [mm]	d2, ø [mm]	arc [°]	H [cm]	H1 [cm]	X [cm]	Z [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.289.14.1	50 / 40 / 40	50	46	46	90	16	20	10.9	5.1	160	20	5	8.70

### Accessories

- Geberit sleeve → p. 61
- Geberit sleeve → p. 61

**Geberit Silent-PP connection bend 87.5° for WC**

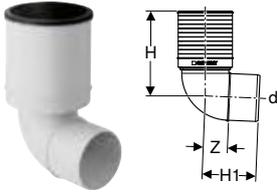

click & scan

**Application purposes**

- For draining off waste water within buildings
- For connecting floor-standing WC ceramic appliances

**Characteristics**

- Acoustically optimised

**Technical data**

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

**Scope of delivery**

- Protective cap
- Sleeve made of EPDM

Art. no.	Colour / surface	DN	d, ø [mm]	arc [°]	H [cm]	H1 [cm]	Z [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.493.11.1	white alpine	90	90	87.5	20	12.6	5.8	120	10	1	34.74
390.593.11.1	white alpine	100	110	87.5	19.1	11	4.9	80	10	1	37.79

**Straight connectors**

**Geberit Silent-PP straight connector**



click & scan

**Application purposes**

- For draining off waste water within buildings

**Characteristics**

- Acoustically optimised

**Technical data**

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

**Scope of delivery**

- Protective cap

Art. no.	DN	d, ø [mm]	d1, ø [mm]	E [cm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.080.14.1	30	32	46	4.5	3.5	1200	50	10	8.14
390.180.14.1	40	40	46	4.7	3.2	1920	80	10	5.67
390.281.14.1	50	50	58	5.1	3.2	1200	100	10	5.67


**To order additionally**

- Sleeve

**Accessories**

- Geberit sleeve → p. 61

**Geberit Silent-PP straight connector for WC**



click & scan

**Application purposes**

- For draining off waste water within buildings
- For connecting floor-standing WC ceramic appliances

**Characteristics**

- Acoustically optimised

**Technical data**

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

**Scope of delivery**


- Protective cap
- Sleeve made of EPDM

Art. no.	Colour / surface	DN	d, ø [mm]	E [cm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
390.592.11.1	white alpine	100	110	18	10.9	80	10	1	35.43

## Accessories

### Pipe brackets

#### Geberit Silent-PP adaptor nipple M10 to G 1/2"




click & scan

##### Technical data

Product material	Zinc-plated steel
------------------	-------------------

Art. no.	Colour / surface	G ["]	M [mm]	L [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.798.26.1	galvanized	1/2	10	5.2	100	20	11.05

#### Geberit Silent-PP Pipe bracket, insulated, with threaded socket M8 / M10

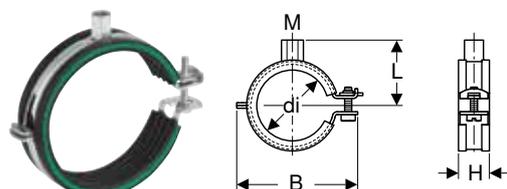

click & scan

##### Technical data

Product material	Steel
------------------	-------

##### Characteristics

- Quick-lock
- Screw with slotted head and crosshead
- Threaded socket four-times welded
- Sound insulation in accordance with DIN 4109
- Zinc-plated

Art. no.	Colour / surface	DN	M [mm]	di, ø [mm]	L [cm]	B [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.099.26.1	galvanized	30	8 / 10	32	4	7.1	2.3	100	25	2.79
390.199.26.1	galvanized	40	8 / 10	40	4.2	7.7	2.3	100	25	2.83
390.299.26.1	galvanized	50	8 / 10	50	4.8	8.8	2.3	100	25	2.85
390.399.26.1	galvanized	70	8 / 10	75	6.2	12.6	2.8	100	25	5.45
390.499.26.1	galvanized	90	8 / 10	90	6.8	13.7	2.8	100	25	5.56
390.599.26.1	galvanized	100	8 / 10	110	7.7	15.6	2.8	100	25	5.69
390.699.26.1	galvanized	125	8 / 10	125	8.9	17.4	2.8	50	10	9.24
390.799.26.1	galvanized	150	8 / 10	160	10.6	21.2	2.8	50	10	11.32

## Sealings

### Geberit Silent-PP socket plug



click & scan

#### Application purposes

- For building drainage
- For draining off waste water within buildings

#### Characteristics

- Acoustically optimised

#### Technical data

Installation temperature	-10 – +40 °C
Product material	PP-MD
Thermal expansion	0.08 mm/(m·K)

Art. no.	DN	d, ø [mm]	H [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
390.128.14.1	40	40	4.1	2000	50	10	3.66
390.228.14.1	50	50	4.7	2000	50	10	4.83
390.328.14.1	70	75	5.4	800	50	10	6.32
390.428.14.1	90	90	6	400	50	10	13.42
390.528.14.1	100	110	6.6	400	50	10	14.20
390.628.14.1	125	125	7.3	400		10	19.03
390.728.14.1	150	160	7.9	120		5	23.59

## Seals

### Geberit lip seal, EPDM



click & scan

#### Application purposes

- For Geberit Silent-PP ring seal sockets
- For Geberit Silent-Pro ring seal sockets
- For Geberit HDPE ring seal sockets with lip seal

#### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
242.278.00.1	30	32	100	10	1.88
241.785.00.1	40	40	100	10	1.88
241.786.00.1	50	50	100	10	1.88
241.787.00.1	70	75	100	10	3.04
241.790.00.1	90	90	100	10	3.04
241.791.00.1	100	110	100	10	3.04
242.279.00.1	125	125	100	10	1.88
242.280.00.1	150	160	100	10	1.88

### Geberit lip seal EPDM, symmetrical



click & scan

#### Application purposes

- For Geberit Silent-PP expansion sockets and slip coupling
- For Geberit Silent-Pro slip couplings

#### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
242.281.00.1	30	32		10	1.88
241.792.00.1	40	40		10	1.88
241.793.00.1	50	50		10	1.88
241.794.00.1	70	75		10	1.88

Art. no.	DN	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
241.795.00.1	90	90		10	1.88
241.796.00.1	100	110	100	10	1.88
242.282.00.1	125	125		10	1.88
242.283.00.1	150	160		10	1.88

## Geberit Silent-PP sleeve



click & scan

### Application purposes

- For Geberit Silent-PP connection bends and straight connectors

### Technical data

Product material	EPDM
------------------	------

Art. no.	d, ø [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
241.797.00.1	110	20	5	13.57

## Geberit sleeve



click & scan

### Application purposes


- For bidets and washbasins

### Technical data

Product material	EPDM
------------------	------

Art. no.	d, ø [mm]	d1, ø [mm]	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
152.796.00.1	40	44	2.3		100	10	1	8.85
152.495.00.1	32	46	2.3		100	10	1	3.27
152.496.00.1	40	46	2.3		100	10	1	4.67
153.566.16.1	50	58	2.3	6400	100	10	1	8.85

## Geberit sleeve

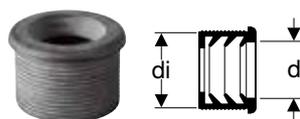

click & scan

### Application purposes

- For bidets and washbasins

### Technical data

Product material	EPDM
------------------	------

Art. no.	DN	d, ø [mm]	di, ø [mm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
152.682.00.1	50	32	44	100	10	1	5.64
152.689.00.1	56	32	50	100	10	1	8.85
152.690.00.1	56	40	50	100	10	1	9.20
152.691.00.1	60	32	57	100	10	1	9.41
152.692.00.1	60	40	57	100	10	1	9.41
152.693.00.1	60	50	57	100	10	1	9.69

## Protective caps

### Geberit Silent-PP protective cap



[click & scan](#)

#### Application purposes

- For Geberit Silent-PP connection bends and straight connectors

#### Characteristics

- Yellow

#### Technical data

Product material	PE-LD
------------------	-------

Art. no.	d, $\emptyset$ [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
241.799.00.1	46	30	5	3.04
241.885.00.1	58	20	5	6.29

### Geberit Silent-PP protective cap



[click & scan](#)

#### Application purposes

- For Geberit Silent-PP connection bends and straight connectors

#### Characteristics

- Yellow

#### Technical data

Product material	PE-LD
------------------	-------

Art. no.	d, $\emptyset$ [mm]	SU3 [pc.]	SU2 [pc.]	GBP/pc.
241.798.00.1	110	20	5	6.29

## Consumables

### Geberit lubricant, 250 ml



[click & scan](#)

#### Application purposes

- For lubricating the seals of push-fit connections
- For building drainage

Art. no.	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
953.761.00.1	780	10	1	6.21

## Geberit grease pencil with retractable lead



[click & scan](#)

### Application purposes

- For marking on Geberit pipes

### Characteristics

- Pressure pin with convenient one-hand operation
- Lead retractable for protection after use
- Water-soluble
- Washable from smooth surfaces
- UV-resistant


Art. no.	Colour / surface	SU3	SU1	GBP/pc.
		[pc.]	[pc.]	
690.102.00.1	yellow	25	1	25.60

### Accessories

- Geberit spare leads for grease pencil with retractable lead → p. 66



## Geberit spare leads for grease pencil with retractable lead



[click & scan](#)

### Characteristics

- Water-soluble
- Washable from smooth surfaces
- UV-resistant

### Scope of delivery

- Box with 12 spare leads

Art. no.	Colour / surface	SU3	SU1	GBP/pc.
		[pc.]	[pc.]	
690.103.00.1	yellow	25	1	25.60



# Fire Protection, Sound Insulation and Moisture Protection


<b>Fire protection .....</b>	<b>126</b>
Fire protection for waste and drainage systems .....	126
<b>Sound insulation.....</b>	<b>126</b>
Insulations for structure-borne sound decoupling .....	126
Insulations for structure-borne sound decoupling and airborne sound insulation... ..	127
<b>Moisture protection .....</b>	<b>129</b>
Caulks .....	129



## Fire protection

### Fire protection for waste and drainage systems

#### Geberit fire protection sleeve RS90 Plus EN

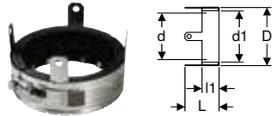

click & scan

##### Application purposes

- For pipe feed-throughs 0°–90° in wall or ceiling
- For Geberit discharge pipes with pipe dimensions  $\varnothing$  40–200 mm
- For direct installation in ceilings, drywalls or solid walls in new installations
- For later installation in ceilings, drywalls and solid walls
- For protecting against the spread of smoke and fire
- Not suitable for passing other parts or aids through

##### Characteristics

- Approval in accordance with EN 13501-2
- According to technical specification ETA-16/0001
- Fire resistance class EI 90-U/U
- Sound-insulating

##### Scope of delivery

- Concrete screws
- Structure-borne sound insulation
- Adhesive strip
- Information sign

##### Technical data


Product material	Stainless steel
------------------	-----------------

Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	D [cm]	L [cm]	l1 [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
348.300.00.1	40–56	40–56	63	7.8	8.5	5	10	1	67.16
348.301.00.1	60 / 70	63 / 75	83	10.2	8.5	5	10	1	75.95
348.302.00.1	90	90	98	11.9	8.5	5	10	1	80.56
348.303.00.1	100	110	118	14.5	8.5	5	10	1	85.05
348.304.00.1	125	125 / 135	141	17	10.5	7	10	1	111.40
348.305.00.1	150	160	169	20.6	11.5	8	10	1	144.61
348.306.00.1	200	200	207	27.2	12.5	9		1	167.11

## Sound insulation

### Insulations for structure-borne sound decoupling

#### Geberit insulation hose made of PE

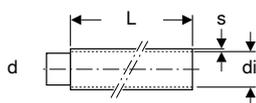

click & scan

##### Application purposes

- For structure-borne sound insulation of pipes
- For concealed installation

##### Characteristics


- Fire behaviour class E according to EN 13501-1

##### Technical data

Product material	PE-E
------------------	------

Art. no.	DN	d, $\varnothing$ [mm]	di, $\varnothing$ [mm]	s [mm]	L [m]	SU4 [m]	SU3 [m]	SU2 [m]	/m
305.921.00.1	56 / 60	56 / 63	74	4	15	300	150	15	1.30
310.921.00.1	100 / 125	110 / 135	145	4	15	240	120	15	1.96

## Geberit insulation tape made of PE

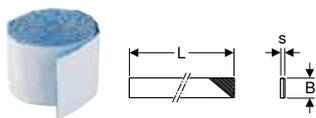

click & scan

### Application purposes

- For structure-borne sound insulation of fittings
- For structure-borne sound insulation of pipes
- For concealed installation

### Characteristics

- Fire behaviour class E according to EN 13501-1
- Sound-insulating
- Self-adhesive

### Technical data

Product material	PE-E
------------------	------

Art. no.	s [mm]	L [m]	B [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
300.007.00.2	3	3.6	7	840	140	14	1	8.14

## Insulations for structure-borne sound decoupling and airborne sound insulation

### Geberit Isol Flex sound insulation mat, precut for pipe



click & scan

### Application purposes

- For airborne sound insulation and structure-borne sound decoupling
- Suitable to some extent for use as anticondensation insulation for rainwater pipes

### Characteristics


- Self-adhesive
- Sound-insulating
- Precut to fit pipe diameter
- Surface suitable for adhesive tape
- Fire protection class 5.2 in accordance with VKF
- Building material class B2 in accordance with DIN 4102-1
- Fire behaviour class E according to EN 13501-1

### Technical data

Installation temperature	-5 – +40 °C
Storage temperature	-20 – +60 °C
Temperature resistance	-20 – +80 °C
Product material	PUR
Thermal conductivity	0.042 W/(m·K)
Water vapour diffusion resistance	32000

Art. no.	DN	d, ø [mm]	s [mm]	L [m]	B [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
356.010.00.1	56 / 60	56 / 63	17	1.18	32	40	10	1	53.46
356.011.00.1	70	75	17	1.18	36	40	10	1	59.64
356.012.00.1	90	90	17	1.18	41	40	10	1	69.38
356.013.00.1	100	110	17	1.18	48	40	10	1	79.10
356.014.00.1	125	125 / 135	17	1.18	57		5	1	91.88

## Geberit Isol Flex sound insulation mat

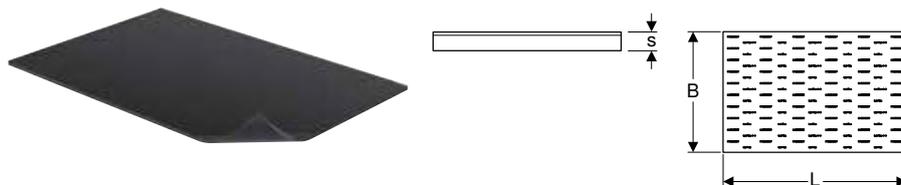

click & scan

### Application purposes

- For airborne sound insulation and structure-borne sound decoupling
- Suitable to some extent for use as anticondensation insulation for rainwater pipes

### Characteristics


- Sound-insulating
- Surface suitable for adhesive tape
- Fire protection class 5.2 in accordance with VKF
- Building material class B2 in accordance with DIN 4102-1
- Fire behaviour class E according to EN 13501-1

### Technical data

Installation temperature	-5 – +40 °C
Storage temperature	-20 – +60 °C
Temperature resistance	-20 – +80 °C
Product material	PUR
Thermal conductivity	0.042 W/(m·K)
Water vapour diffusion resistance	32000

Art. no.	s [mm]	L [m]	B [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
356.015.00.1	17	1.18	78	38	2	110.43

## Geberit Isol Flex sound insulation mat, self-adhesive

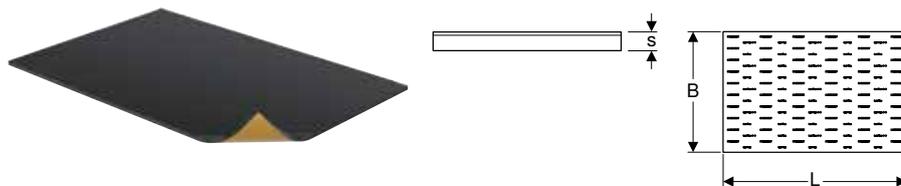

click & scan

### Application purposes

- For airborne sound insulation and structure-borne sound decoupling
- Suitable to some extent for use as anticondensation insulation for rainwater pipes

### Characteristics

- Self-adhesive
- Sound-insulating
- Surface suitable for adhesive tape
- Fire protection class 5.2 in accordance with VKF
- Building material class B2 in accordance with DIN 4102-1
- Fire behaviour class E according to EN 13501-1

### Technical data

Installation temperature	-5 – +40 °C
Storage temperature	-20 – +60 °C
Temperature resistance	-20 – +80 °C
Product material	PUR
Thermal conductivity	0.042 W/(m·K)
Water vapour diffusion resistance	32000

Art. no.	s [mm]	L [m]	B [cm]	SU4 [pc.]	SU2 [pc.]	GBP/pc.
356.016.00.1	17	1.18	78	38	2	126.79

## Moisture protection

### Caulks

#### Geberit moisture sealing with contact foil Resistit®



click & scan

##### Application purposes


- For sealing pipe feed-throughs in walls, ceilings and floors
- For Geberit HDPE
- For Geberit Silent-db20
- For Geberit Silent-PP
- For bonded connections
- For hot bitumen and sealing paint
- For water levels up to 1 m
- For protecting against moisture
- For connecting elastic bituminous seals (e.g. SBS bitumen)
- Not suitable for connection of plastic caulk on bitumen base (e.g. APP sheets)
- Not suitable for processing with an open flame

##### Characteristics

- With seal made of EPDM
- Can be thermally processed with hot air

Art. no.	DN	Sealing of connection	d, ø [mm]	D [cm]	L [cm]	B [cm]	H [cm]	SU4	SU2	SU1	GBP/pc.
								[pc.]	[pc.]	[pc.]	
361.673.00.1	50	EPDM (Resistit® Perfekt E)	50	13.5	50	50	2.5			1	99.37
363.673.00.1	56	EPDM (Resistit® Perfekt E)	56	13.5	50	50	2.5			1	111.08
365.673.00.1	70	EPDM (Resistit® Perfekt E)	75	19.5	50	50	2.5			1	114.00
367.673.00.1	100	EPDM (Resistit® Perfekt E)	110	19.5	50	50	2.5	240	5	1	97.65
368.673.00.1	125	EPDM (Resistit® Perfekt E)	125	21	50	50	2.5			1	134.45

#### Geberit moisture sealing with contact foil Sarnafil® PVC

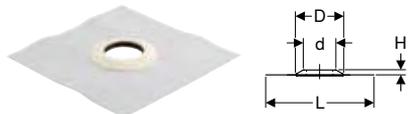

click & scan

##### Application purposes

- For sealing pipe feed-throughs in walls, ceilings and floors
- For Geberit HDPE
- For Geberit Silent-db20
- For Geberit Silent-PP
- For welding with PVC foil
- For adhesive and welded connections
- For water levels up to 1 m
- For protecting against moisture

##### Characteristics

- With seal made of EPDM

Art. no.	DN	Sealing of connection	d, ø [mm]	D [cm]	L [cm]	B [cm]	H [cm]	SU1	GBP/pc.
								[pc.]	
363.674.00.1	56	PVC (Sarnafil G 410-18)	56	13.5	48	48	2.5	1	87.98
367.674.00.1	100	PVC (Sarnafil G 410-18)	110	19.5	48	48	2.5	1	89.15



**GEBERIT**  
**GFB 90**  
**BON-AIR**  
TYPE A1-EN 12082

Bechtungsstelle  
Nur für Abwasser / Toiletten  
Nur Abwasser / Toiletten  
Nur Abwasser / Toiletten

# Air Admittance Valves for Drainage

**Air admittance valves ..... 132**

**Energy retaining valves..... 133**



## Air admittance valves

### Geberit air admittance valve GRB50, for drainage systems



click & scan

#### Application purposes

- For ventilating discharge pipes
- For discharge pipes with pipe dimensions  $\varnothing$  32–63 mm
- For building drainage
- For gravity drainage systems

#### Characteristics

- Antivacuum valve in accordance with EN 12380, Type A I

#### Scope of delivery


- Sleeve

#### Technical data

Operating temperature	-20 – +60 °C
Air volume flow rate (atmospheric air) at -250 Pa	7.2 l/s
Product material	ABS

Art. no.	Colour / surface	DN	d, $\varnothing$ [mm]	G ["]	d1, $\varnothing$ [mm]	di, $\varnothing$ [mm]	L [cm]	B [cm]	H [cm]	h [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.900.00.1	white	50	50	1 1/2	63	32 / 40	8.3	7.4	7.3	3.2	50	10	1	82.69

### Air admittance valve GRB90, for Geberit HDPE

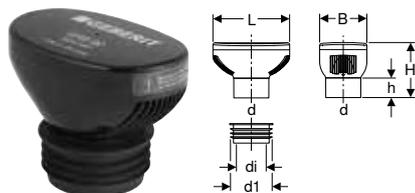

click & scan

#### Application purposes

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For discharge pipes with pipe dimensions  $\varnothing$  75 mm,  $\varnothing$  90 mm and  $\varnothing$  110 mm

#### Characteristics

- Thermal insulation integrated in housing
- Antivacuum valve in accordance with EN 12380, Type A I

#### Scope of delivery

- Sleeve

#### Technical data

Operating temperature	-20 – +60 °C
Air volume flow rate (atmospheric air) at -250 Pa	32 l/s
Product material	ABS

Art. no.	Colour / surface	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	di, $\varnothing$ [mm]	L [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.006.00.1	black	90	90	103.5	75	19.5	12	14.1	5	140	4	1	42.08

### Air admittance valve GRB90, for Geberit Silent-db20



click & scan

#### Application purposes

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For discharge pipes with pipe dimensions  $\varnothing$  75 mm,  $\varnothing$  90 mm and  $\varnothing$  110 mm

#### Characteristics

- Thermal insulation integrated in housing
- Antivacuum valve in accordance with EN 12380, Type A I

**Technical data**


Operating temperature	-20 – +60 °C
Air volume flow rate (atmospheric air) at -250 Pa	32 l/s
Product material	ABS

**Scope of delivery**

- Sleeve

Art. no.	Colour / surface	DN	d, ø [mm]	d1, ø [mm]	di, ø [mm]	L [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
310.007.00.1	black	90	90	99.5	75	19.5	12	14.1	5	140	4	1	39.89

**Air admittance valve GRB90, for Geberit Silent-PP and Geberit Silent-Pro**



click & scan

**Application purposes**

- For ventilating discharge pipes
- For building drainage
- For gravity drainage systems
- For pipes and fittings ø 75–110 mm

**Characteristics**

- Thermal insulation integrated in housing
- Antivacuum valve in accordance with EN 12380, Type A I

**Scope of delivery**

- Sleeve


**Technical data**

Operating temperature	-20 – +60 °C
Air volume flow rate (atmospheric air) at -250 Pa	32 l/s
Product material	ABS

Art. no.	Colour / surface	DN	d, ø [mm]	d1, ø [mm]	di, ø [mm]	L [cm]	B [cm]	H [cm]	h [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
307.006.00.1	black	90	90	106	75	19.5	12	14.1	5	140	4	1	39.89

**Energy retaining valves**

**Geberit energy retaining valve ERV**

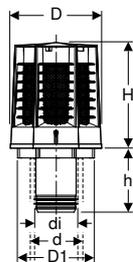

click & scan

**Application purposes**

- For ventilating discharge pipes
- For venting discharge pipes
- For gravity drainage systems
- Suitable for all Geberit drainage systems
- For plugging in ventilation pipes of stacks ø 110 mm
- For use outside the building
- Suitable for sheet metal edgings with a maximum diameter of 160 mm

**Characteristics**

- Negative pressure compensation
- Overpressure compensation
- UV-resistant
- Heat retention in ventilation pipes of stacks
- Odour-stopping


**Scope of delivery**

- Sleeve

**Technical data**

Operating temperature	-20 – +60 °C
Product material	PP-C

Art. no.	Colour / surface	DN	d, ø [mm]	di, ø [mm]	D [cm]	D1 [cm]	H [cm]	h [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.969.00.1	black	100	110	98–103	21.5	16	25.1	15.2	35	1	424.89

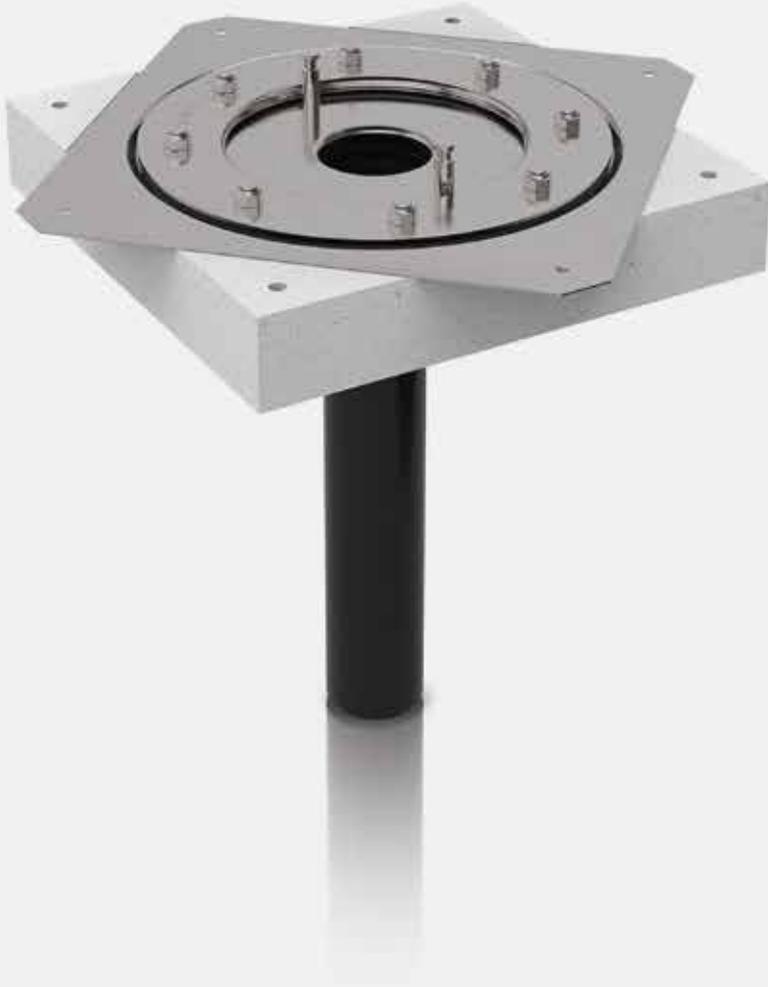

# Geberit Pluvia Roof Drainage Systems

<b>Preliminary remarks</b> .....	<b>137</b>
Assortment overview – Geberit Pluvia roof drainage.....	138
<b>Roof outlets</b> .....	<b>139</b>
Roof outlets up to 12 l/s .....	139
Roof outlets up to 25 l/s .....	142
<b>Roof outlets for gutters</b> .....	<b>143</b>
Roof outlets up to 12 l/s .....	143
Roof outlets up to 25 l/s .....	144
<b>Vapour barrier elements</b> .....	<b>145</b>
For roof outlets up to 12 l/s .....	145
For roof outlets up to 25 l/s.....	145
<b>Emergency overflows</b> .....	<b>146</b>
For roof outlets up to 12 l/s .....	146
For roof outlets up to 25 l/s.....	146
<b>Fastenings</b> .....	<b>146</b>
Fastening system d40–200.....	146
Fastening system d250–315.....	149
<b>Accessories</b> .....	<b>151</b>
For roof outlets.....	151
For fastenings.....	156





# Preliminary remarks

## Introduction to Geberit Pluvia

Geberit Pluvia is the leading siphonic roof drainage system used for over 40 years around the world. Architects, consultants and contractors have chosen the system for some of the most prestigious and ground breaking designs due to the freedom and flexibility it provides.

Siphonic roof systems are widely used in the industrial and commercial sector for almost any type of roof.

## Benefits of Geberit Pluvia

### New architectural flexibility in building and use

There is no slope on the pipework, meaning less space is taken up in the roof giving more flexibility to architects

### Less underground pipe work

There are fewer down pipes when using syphonic systems, ensuring ground works are kept to a minimum

### Fewer pipes and fittings

With fewer down pipes and underground work, less material is needed

### Reduced pipe dimensions

Siphonic systems at full bore, meaning smaller pipe dimensions are required

### Less space required

With smaller pipes, less fittings and no slope on the pipework, this creates more space within a building

### Self cleaning action

Geberit Pluvia drains at high velocity, meaning the pipework is self-cleaning

### Simple and speedy fastening system

Rail and tension wedge system ensures the simplest of installations

### Experienced

More than 60 years of practical experience in drainage technology

## Always consider

Geberit Pluvia systems are designed using in-house design software from Geberit, ProPlanner. This is used by the Geberit technical department and our Approved Installers to ensure that Geberit Pluvia is designed correctly for your project.

For feasibility designs, you can send your roof plan and elevation drawings to our technical department. For a full tender and quotation, please speak to one of our Approved Installers (details available from our technical department).

## Use the correct tooling

There are two main connection methods, butt-welding and electrowelding.


### Butt-welding:

- Great for prefabrication on or off site
- Media machine up to 160mm
- Universal machine up to 315mm

### Electrowelding:

- Great for on site installations
- Use AW 315G (from Advanced Welding) 110v for up to 315mm

If you require any technical assistance, please contact the technical department on 01926 516800, or email [technical@geberit.co.uk](mailto:technical@geberit.co.uk).

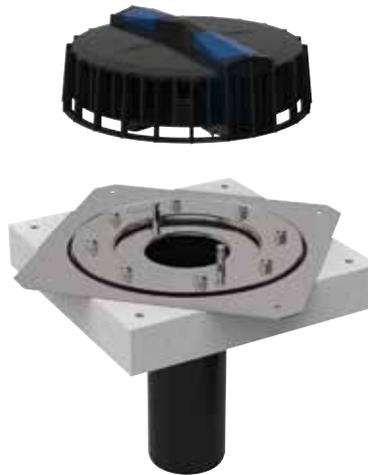

Assortment overview – Geberit Pluvia roof drainage

Geberit Great Britain, Version: December 2025


Installation	Water-bearing layer	Connection type		9 l/s	12 l/s	19 l/s	25 l/s	45 l/s	60 l/s	100 l/s
Flat roof	Bitumen	Contact sheet	359.108.00.1 Geberit Pluvia roof outlet with contact sheet		✓					
Flat roof			359.099.00.1 Geberit Pluvia roof outlet with contact sheet				✓			
Flat roof		Contact sheet and flange	359.109.00.1 Geberit Pluvia roof outlet with contact sheet and fastening flange		✓					
Flat roof	Roof foil	Flange	359.117.00.1 Geberit Pluvia roof outlet with fastening flange, for roof foils	✓						
Flat roof			359.105.00.1 Geberit Pluvia roof outlet with fastening flange, for roof foils		✓					
Flat roof			359.098.00.1 Geberit Pluvia roof outlet with fastening flange, for roof foils					✓		
Flat roof	Roof foil or bitumen	Contact foil	359.118.00.1 Geberit Pluvia roof outlet	✓						
Flat roof			359.107.00.1 Geberit Pluvia roof outlet		✓					
Gutter		Contact sheet	359.111.00.1 Geberit Pluvia roof outlet with contact sheet for gutters		✓					
Gutter			359.100.00.1 Geberit Pluvia roof outlet with contact sheet for gutters					✓		
Gutter		Flange	359.112.00.1 Geberit Pluvia roof outlet with flange, for gutters		✓					
Gutter			359.007.00.1 Geberit Pluvia roof outlet with flange, for gutters					✓		

✓ Compatible

# Roof outlets

## Roof outlets up to 12 l/s

### Geberit Pluvia roof outlet with fastening flange, for roof foils

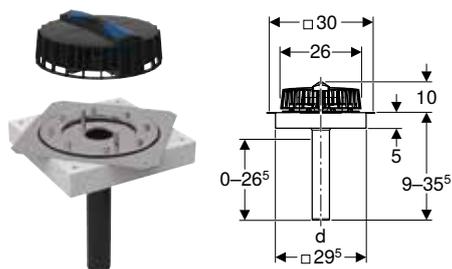

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For roof foils without fleece lamination
- For syphonic roof drainage systems
- For connecting to roof foils with thicknesses  $\leq 4$  mm

#### Technical data

Head of water max.	40 mm
--------------------	-------

#### Characteristics


- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened
- Maintenance-free clamping flange joint

#### Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Flange gasket made of EPDM
- Anticondensation insulation
- Fastening flange with prevailing torque nuts

Art. no.	DN	Sealing of connection	d, $\emptyset$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.105.00.1	56	CrNi steel 1.4301	56	1-12	24	1	297.82

### Geberit Pluvia roof outlet

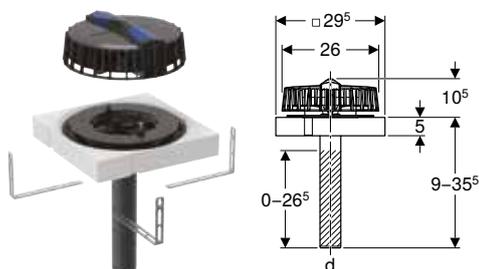

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems

#### Technical data

Head of water max.	40 mm
--------------------	-------

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

#### Scope of delivery


- Outlet grating with function disc
- Outlet disc
- Base unit
- Anticondensation insulation
- Protection box cover
- Fastening material

Art. no.	DN	d, $\emptyset$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.107.00.1	56	56	1-12	24	1	133.44

#### Accessories

- Geberit Pluvia contact foil for roof foils → p. 151
- Geberit Pluvia installation sheet → p. 152
- Geberit Pluvia contact sheet, universal → p. 153

## Geberit Pluvia roof outlet with fastening flange, for roof foils

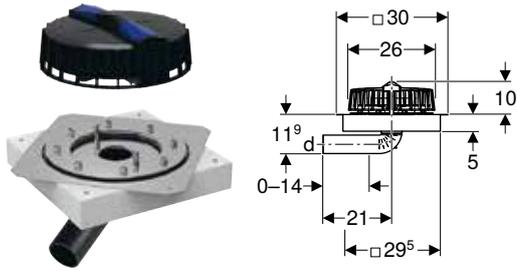

click & scan

### Application purposes

- For collecting and draining off rainwater from roofs
- For renovated roofs
- For roof foils without fleece lamination
- For syphonic roof drainage systems
- For connecting to roof foils with thicknesses  $\leq 4$  mm
- For horizontal pipe connections

### Technical data

Head of water max.	40 mm
--------------------	-------

### Characteristics


- Horizontal outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened
- Maintenance-free clamping flange joint
- Low installation height

### Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Flange gasket made of EPDM
- Fastening flange with prevailing torque nuts
- Anticondensation insulation

Art. no.	DN	Sealing of connection	d, $\emptyset$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.117.00.1	56	CrNi steel 1.4301	56	1-9	24	1	323.02

## Geberit Pluvia roof outlet

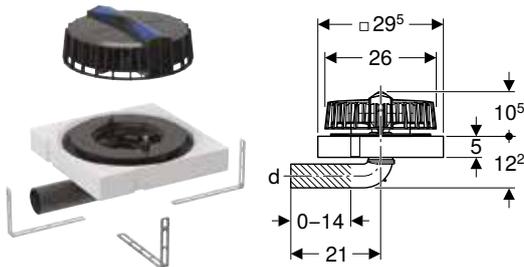

click & scan

### Application purposes

- For collecting and draining off rainwater from roofs
- For renovated roofs
- For syphonic roof drainage systems
- For horizontal pipe connections

### Technical data

Head of water max.	40 mm
--------------------	-------

### Characteristics

- Horizontal outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened
- Low installation height

### Scope of delivery


- Outlet grating with function disc
- Outlet disc
- Base unit
- Anticondensation insulation
- Protection box cover
- Fastening material

Art. no.	DN	d, $\emptyset$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.118.00.1	56	56	1-9	24	1	149.69

### Accessories

- Geberit Pluvia contact foil for roof foils → p. 151
- Geberit Pluvia contact sheet, universal → p. 153

### Geberit Pluvia roof outlet with contact sheet

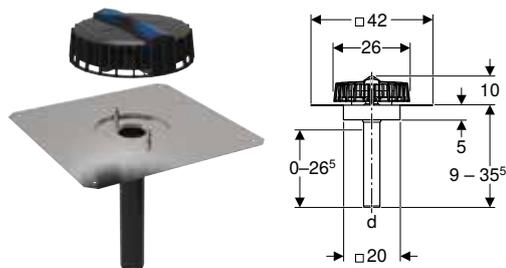

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems
- For connecting bituminous roof sealings

#### Technical data

Head of water max.	40 mm
--------------------	-------

#### Characteristics


- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

#### Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Anticondensation insulation
- Protection box cover

Art. no.	DN	Sealing of connection	d, ø [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.108.00.1	56	CrNi steel 1.4301	56	1-12	8	1	223.78

### Geberit Pluvia roof outlet with contact sheet and fastening flange

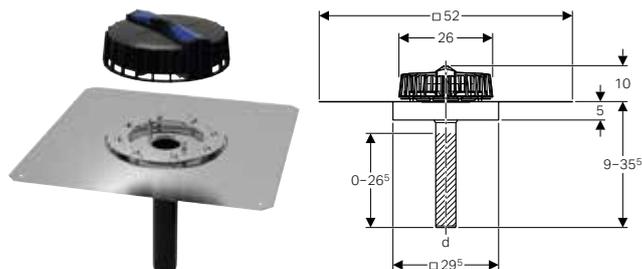

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems
- For connecting bituminous roof sealings

#### Technical data

Head of water max.	40 mm
--------------------	-------

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened


#### Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Fastening flange
- Anticondensation insulation
- 8 wing nuts made of CrNi steel
- Protection box cover

Art. no.	DN	Sealing of connection	d, ø [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.109.00.1	56	CrNi steel 1.4301	56	1-12	8	1	287.99

## Roof outlets up to 25 l/s

### Geberit Pluvia roof outlet with fastening flange, for roof foils

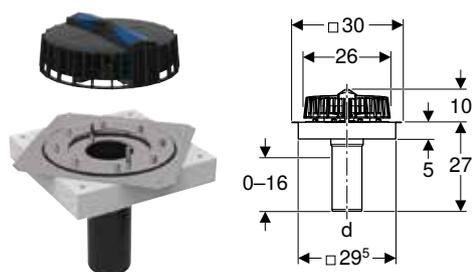

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For roof foils without fleece lamination
- For syphonic roof drainage systems
- For connecting to roof foils with thicknesses  $\leq 4$  mm

#### Technical data

Head of water max.	50 mm
--------------------	-------

#### Characteristics


- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened
- Maintenance-free clamping flange joint

#### Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Flange gasket made of EPDM
- Fastening flange with prevailing torque nuts
- Anticondensation insulation

Art. no.	DN	Sealing of connection	d, $\varnothing$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.098.00.1	90	CrNi steel 1.4301	90	1-25	24	1	432.12

### Geberit Pluvia roof outlet with contact sheet

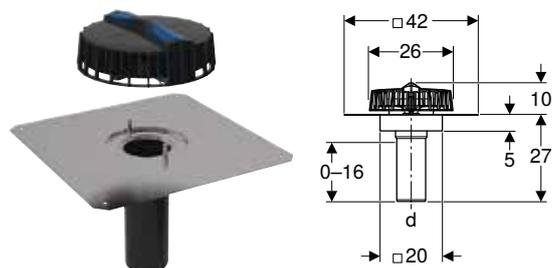

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems
- For connecting bituminous roof sealings

#### Technical data

Head of water max.	50 mm
--------------------	-------

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

#### Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Protection box cover
- Anticondensation insulation

Art. no.	DN	Sealing of connection	d, $\varnothing$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.099.00.1	90	CrNi steel 1.4301	90	1-25	12	1	388.32

# Roof outlets for gutters

## Roof outlets up to 12 l/s

### Geberit Pluvia roof outlet with contact sheet for gutters



click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For gutters with a minimum width of 30 cm
- For connecting metallic product materials
- For syphonic roof drainage systems

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

#### Scope of delivery


- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Anticondensation insulation

#### Technical data

Head of water max.	40 mm
--------------------	-------

Art. no.	DN	Sealing of connection	d, $\varnothing$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.111.00.1	56	CrNi steel 1.4301	56	1-12	24	1	373.73

### Geberit Pluvia roof outlet with flange, for gutters

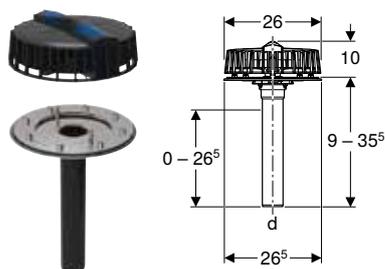

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems
- For gutters with a minimum width of 30 cm
- For connecting metallic product materials with thicknesses  $\leq 4$  mm

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened
- Maintenance-free clamping flange joint

#### Scope of delivery

- Outlet grating with function disc
- Base unit made of CrNi steel 1.4301
- Flange gasket made of EPDM
- Fastening flange with prevailing torque nuts


#### Technical data

Head of water max.	40 mm
--------------------	-------

Art. no.	DN	Sealing of connection	d, $\varnothing$ [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.112.00.1	56	CrNi steel 1.4301	56	1-12	24	1	288.85

## Roof outlets up to 25 l/s

### Geberit Pluvia roof outlet with contact sheet for gutters

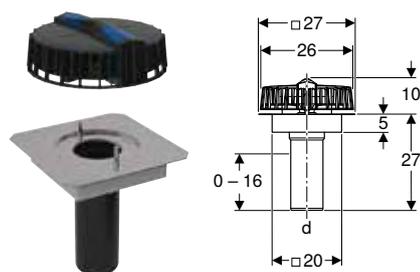

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For gutters with a minimum width of 30 cm
- For connecting metallic product materials
- For syphonic roof drainage systems

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

#### Technical data

Head of water max.	50 mm
--------------------	-------

#### Scope of delivery

- Outlet grating with function disc
- Base unit with contact sheet made of CrNi steel 1.4301
- Anticondensation insulation

Art. no.	DN	Sealing of connection	d, ø [mm]	Discharge rate [l/s]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.100.00.1	90	CrNi steel 1.4301	90	1-25	24	1	345.34

### Geberit Pluvia roof outlet with flange, for gutters



click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For syphonic roof drainage systems
- For gutters with a minimum width of 30 cm
- For connecting metallic product materials with thicknesses ≤ 4 mm

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened
- Maintenance-free clamping flange joint

#### Technical data

Head of water max.	50 mm
--------------------	-------

#### Scope of delivery


- Outlet grating with function disc
- Base unit made of CrNi steel 1.4301
- Flange gasket made of EPDM
- Fastening flange with prevailing torque nuts

Art. no.	DN	Sealing of connection	d, ø [mm]	Discharge rate [l/s]	SU1 [pc.]	GBP/pc.
359.007.00.1	90	CrNi steel 1.4301	90	1-25	1	458.29

## Vapour barrier elements

### For roof outlets up to 12 l/s

#### Geberit Pluvia vapour barrier connection



click & scan

#### Application purposes

- For syphonic roof drainage systems
- For connecting vapour barriers made of plastic or bitumen
- For Geberit Pluvia roof outlets with discharge rate of 12 l/s
- For insulated roofs with vapour barrier

#### Technical data

Product material	Steel / plastic
------------------	-----------------

Art. no.	DN	Sealing of connection	d, ø [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.113.00.1	56	CrNi steel 1.4301	56	24	1	144.25

#### Accessories

- Geberit Pluvia installation sheet → p. 152

#### Characteristics


- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

#### Scope of delivery

- Anticondensation insulation
- Protection box cover

### For roof outlets up to 25 l/s

#### Geberit Pluvia vapour barrier connection



click & scan

#### Application purposes

- For Geberit Pluvia roof outlets with discharge rate of 25 l/s
- For syphonic roof drainage systems
- For conventional roof drainage systems
- For connecting vapour barriers made of plastic or bitumen
- For insulated roofs with vapour barrier

#### Technical data

Product material	Steel / plastic
------------------	-----------------

Art. no.	DN	Sealing of connection	d, ø [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.102.00.1	90	CrNi steel 1.4301	90	12	1	198.85

#### Accessories

- Geberit Pluvia installation sheet → p. 152

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened


#### Scope of delivery

- Protection box cover
- Anticondensation insulation

## Emergency overflows

### For roof outlets up to 12 l/s

#### Geberit Pluvia emergency overflow

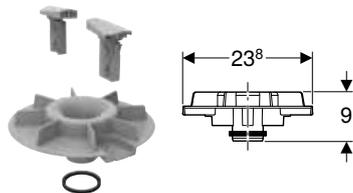

click & scan

##### Application purposes

- For Geberit Pluvia roof outlets with discharge rate of 9 l/s and 12 l/s
- Not suitable for Geberit Pluvia roof outlets with outlet grating made of aluminium cast

##### Scope of delivery

- Overflow section made of PP
- 2 grey rotating lock bars
- Lip seal made of EPDM

##### Technical data

Head of water at 12 l/s max.	80 mm
Overflow height	55 mm

Art. no.


SU4 SU1 GBP/pc.  
[pc.] [pc.]

359.114.00.1

72 1 127.89

## For roof outlets up to 25 l/s

#### Geberit Pluvia emergency overflow

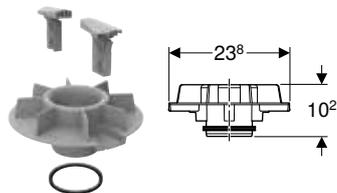

click & scan

##### Application purposes

- For Geberit Pluvia roof outlets with discharge rate of 25 l/s
- Not suitable for Geberit Pluvia roof outlets with outlet grating, grating aperture 8 x 2 cm

##### Scope of delivery

- Overflow section made of PP
- 2 grey rotating lock bars
- Lip seal made of EPDM

##### Technical data

Head of water at 25 l/s max.	95 mm
Overflow height	65 mm

Art. no.

SU4 SU1 GBP/pc.  
[pc.] [pc.]


359.101.00.1

72 1 135.42

## Fastenings

### Fastening system d40–200

#### Geberit Pluvia support rail

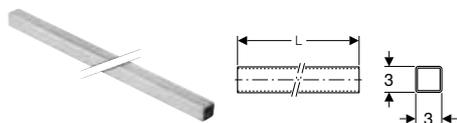

click & scan

##### Application purposes

- For Geberit Pluvia pipe brackets
- For fastening pipes to ceilings

##### Characteristics


- Zinc-plated

**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	L [m]	B [cm]	H [cm]	SU4 [m]	SU2 [m]	/m
362.863.26.1	galvanized	5	3	3	500	5	10.67

**Geberit Pluvia support rail connection element**

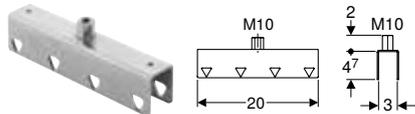

[click & scan](#)

**Application purposes**

- For connecting Geberit support rails with square profile
- For fastening pipes to ceilings
- For fastening vertical pipes to walls

**Characteristics**


- With long thread coupling welded on
- Zinc-plated

**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	L [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.864.26.1	galvanized	20	1300	10	1	9.62

**Geberit Pluvia suspension element**

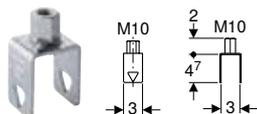

[click & scan](#)

**Application purposes**

- For fastening Geberit Pluvia support rails with square profile
- For fastening pipes to ceilings
- For fastening vertical pipes to walls

**Characteristics**

- With long thread coupling welded on
- Zinc-plated

**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	L [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.862.26.1	galvanized	6.7	2100	100	10	1	3.19

**Geberit Pluvia tension wedge**



[click & scan](#)

**Application purposes**

- For fastening Geberit Pluvia pipe brackets, Pluvia support rail suspension elements and Pluvia connection elements to Pluvia support rails with square profile

**Characteristics**


- Zinc-plated

**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
362.865.26.1	galvanized	9	100	1	1.58

### Geberit Pluvia pipe bracket



click & scan

#### Application purposes

- For anchor-point fastening of pipes in combination with electrofusion couplings
- For sliding bracket fastening of pipes
- For fastening with tension wedges
- For fastening to Geberit Pluvia support rails with square profile


#### Characteristics

- Zinc-plated

#### Technical data

Product material		Steel						
Art. no.	Colour / surface	DN	di, ø [mm]	L [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.	
360.861.00.1	galvanized	40	40	10.6	10	1	5.52	

### Geberit Pluvia pipe bracket, adjustable



click & scan

#### Application purposes

- For anchor-point fastening of pipes in combination with electrofusion tapes
- For anchor-point fastening of pipes in combination with electrofusion couplings
- For sliding bracket fastening of pipes
- For fastening with tension wedges
- For fastening to Geberit Pluvia support rails with square profile


#### Characteristics

- Zinc-plated

#### Technical data

Product material		Steel								
Art. no.	Colour / surface	DN	di, ø [mm]	di1, ø [mm]	L1 [cm]	L2 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.861.00.1	galvanized	50	50	58	11.3	11.7		10	1	6.77
363.861.00.1	galvanized	56	56	64	11.7	12.1	1000	10	1	7.53
364.861.00.1	galvanized	60	63	71	12.1	12.5	1400	10	1	7.81
365.861.00.1	galvanized	70	75	83	12.8	13.2	640	10	1	7.99
366.861.00.1	galvanized	90	90	98	13.6	14	640	10	1	8.18
367.861.00.1	galvanized	100	110	118	14.7	15.1	640	10	1	8.68
368.861.00.1	galvanized	125	125	133	15.5	15.9	400	10	1	9.14
369.861.00.1	galvanized	150	160	168	17.3	17.7	400	10	1	9.86

### Geberit Pluvia pipe bracket, adjustable, with securing clamp



click & scan

#### Application purposes

- For anchor-point fastening of pipes in combination with electrofusion tapes
- For anchor-point fastening of pipes in combination with electrofusion couplings
- For sliding bracket fastening of pipes
- For fastening with tension wedges
- For fastening to Geberit Pluvia support rails with square profile

#### Technical data

Product material	Steel
------------------	-------

#### Characteristics


- Zinc-plated

#### Scope of delivery

- Securing clamp

Art. no.	Colour / surface	DN	di, ø [mm]	di1, ø [mm]	L1 [cm]	L2 [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
370.861.26.1	galvanized	200	200	208	19.4	19.8	180	10	1	22.69

## Geberit electrofusion tape for anchor point

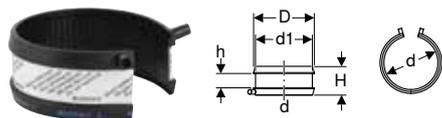

click & scan

### Application purposes

- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets

### Characteristics

- One-piece
- Can be welded with Geberit electrofusion tools


### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\varnothing$ [mm]	d1, $\varnothing$ [mm]	D [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.776.16.1	50	50	58	6.6	6	3	1800	40	10	1	15.41
363.776.16.1	56	56	64	7.2	6	3	1800	40	10	1	15.41
364.776.16.1	60	63	71	7.9	6	3	1620	60	15	1	15.41
365.776.16.1	70	75	83	9.1	6	3	1080	40	10	1	16.36
366.776.16.1	90	90	98	10.6	6	3	864	32	8	1	20.30
367.776.16.1	100	110	118	12.6	6	3	648	36	12	1	20.52
368.776.16.1	125	125	133	14.1	6	3	432	24	8	1	27.21
369.776.16.1	150	160	168	17.6	6	3	288	24	8	1	30.95
370.776.16.1	200	200	208	21.6	6	3	700	10		1	38.88

## Fastening system d250–315

### Geberit Pluvia support rail

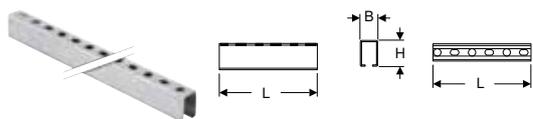

click & scan

### Application purposes

- For fastening pipe brackets with threaded fastening
- For fastening pipes to ceilings

### Characteristics


- C-profile
- Zinc-plated

### Technical data

Product material	Steel
------------------	-------

Art. no.	L [m]	B [cm]	H [cm]	SU4 [m]	SU2 [m]	/m
363.863.00.1	5	4	6	200	5	61.80

### Geberit Pluvia connection element

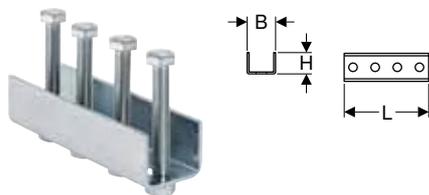

click & scan

### Application purposes

- For connecting Geberit support rails with C-profile

### Characteristics


- Zinc-plated

### Technical data

Product material	Steel
------------------	-------

Art. no.	L [cm]	B [cm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
363.864.00.1	18.4	5.8	4.8	270	5	1	57.54

**Geberit Pluvia suspension element**

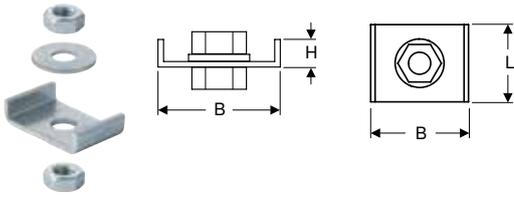

click & scan

**Application purposes**

- For fastening pipes to ceilings and walls
- For fastening Geberit support rails with C-profile and Geberit threaded rods M10

**Characteristics**

- Zinc-plated

**Scope of delivery**


- 2 nuts M10
- Washer

**Technical data**

Product material	Steel
------------------	-------

Art. no.	L [cm]	B [cm]	H [cm]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
363.862.00.1	3	4.7	1.1	50	10	1	4.95

**Geberit Pluvia pipe bracket with electrofusion tape for anchor point**

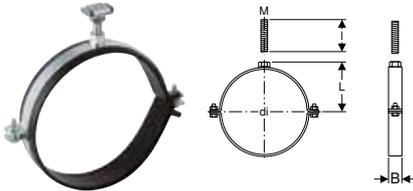

click & scan

**Application purposes**

- For fastening to Geberit Pluvia support rails with C-profile
- For fastening with threaded rods
- For anchor-point fastening of pipes

**Characteristics**

- Female thread
- Zinc-plated

**Scope of delivery**


- Electrofusion tape
- Fastening material

**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	M [mm]	di, ø [mm]	L [cm]	l [cm]	B [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
371.861.00.1	galvanized	250	16	250	14.8	6	3	120	5	1	84.86

**Geberit Pluvia set of pipe brackets with electrofusion tape for anchor point**

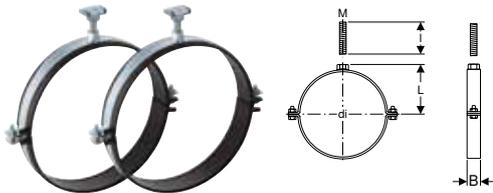

click & scan

**Application purposes**

- For fastening to Geberit Pluvia support rails with C-profile
- For fastening with threaded rods
- For anchor-point fastening of pipes

**Characteristics**

- Female thread
- Zinc-plated

**Scope of delivery**


- Set of 2 pieces

**Technical data**

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	M [mm]	di, ø [mm]	L [cm]	l [cm]	B [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
372.861.00.1	galvanized	300	16	315	18	6	3	24	1	209.84

## Geberit Pluvia pipe bracket with socket M16

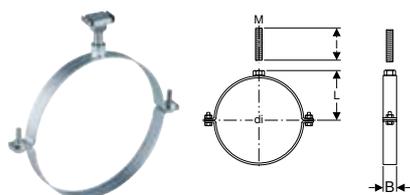

click & scan

### Application purposes

- For sliding bracket fastening of pipes
- For fastening to Geberit Pluvia support rails with C-profile
- For fastening with threaded rods

### Characteristics

- Female thread
- Zinc-plated

### Scope of delivery


- Fastening material

### Technical data

Product material	Steel
------------------	-------

Art. no.	Colour / surface	DN	M [mm]	di, $\emptyset$ [mm]	L [cm]	l [cm]	B [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
371.862.00.1	galvanized	250	16	250	14.8	6	3	240	10	1	38.46
372.862.00.1	galvanized	300	16	315	18	6	3	120	5	1	46.39

## Geberit electrofusion tape set for anchor point

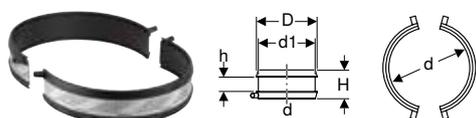

click & scan

### Application purposes

- For building drainage
- For anchor-point fastening of pipes in connection with pipe brackets

### Characteristics

- Two-piece
- Can be welded with Geberit electrofusion tools

### Scope of delivery

- Set of 2 pieces

### Technical data

Product material	PE-HD
------------------	-------

Art. no.	DN	d, $\emptyset$ [mm]	d1, $\emptyset$ [mm]	D [cm]	H [cm]	h [cm]	SU4 [pc.]	SU3 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
372.776.16.1	300	315	323	33.1	6	3	144	12	4	1	72.52

## Accessories

### For roof outlets

## Geberit Pluvia contact foil for roof foils



click & scan

### Application purposes

- For connecting to roof foils

Art. no.	Sealing of connection	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.575.00.1	PVC (Sarnafil G 410-18)		1	102.82
359.579.00.1	PVC (Sikaplan 15 G)	66	1	102.82

## Geberit Pluvia connection pipe, bendable



click & scan

### Application purposes

- For installation inside buildings
- For flexible connection of Geberit Pluvia roof outlets with discharge rate of 12 l/s
- For connecting Geberit Pluvia roof outlets with discharge rate of 12 l/s
- For direct connection to Geberit Pluvia roof outlets
- For use with temperature differentials of between -10 and +50 °C

### Characteristics


- Can be welded on both sides with electrofusion coupling
- Cannot be shortened
- Cannot be cleaned with cleaning rod

Art. no.	DN	d, ø [mm]	D [cm]	L [m]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
360.822.00.1	40	40	4.6	1.1		10	1	39.74
361.822.00.1	50	50	5.8	1.1		10	1	45.94
363.822.00.1	56	56	6.5	1.1		10	1	45.78
364.822.00.1	60	63	7.4	1.1		10	1	59.57
365.822.00.1	70	75	8.9	1.1	60	5	1	71.77

### Accessories

- Geberit Pluvia fastening belt → p. 152

## Geberit Pluvia fastening belt



click & scan

### Application purposes

- For Geberit Pluvia roof outlets with discharge rate of 12 l/s
- For fastening Geberit Pluvia connection pipes with horizontal mounting close to the ceiling
- For installation inside buildings

### Characteristics


- Can be shortened
- With snap fastener for loop

Art. no.	L [cm]	B [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
358.004.00.1	100	5	5	1	15.09



- Fastening material not included in the scope of delivery

## Geberit Pluvia installation sheet

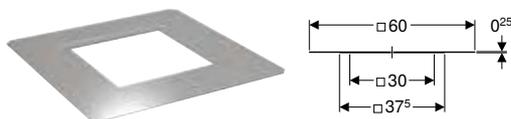

click & scan

### Application purposes

- For Geberit Pluvia roof outlets made of plastic, with discharge rate of 12 l/s
- For fastening Geberit Pluvia base units on lightweight roofs
- For Geberit Pluvia vapour barrier connections 12 l/s
- For Geberit Pluvia vapour barrier connections 25 l/s

### Characteristics

- Hot-dip galvanized

### Scope of delivery


- 4 fastening screws

### Technical data

Product material	Steel
------------------	-------

Art. no.	s [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.122.00.1	1.5	65	1	74.76

### Geberit Pluvia contact sheet, universal

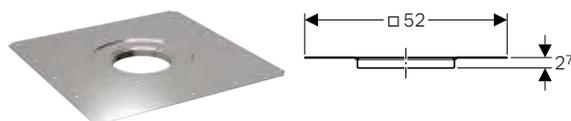

[click & scan](#)

#### Application purposes


- For connecting bituminous roof sealings

#### Scope of delivery

- Condensation insulation ring

Art. no.	Sealing of connection	s [mm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
359.119.00.1	CrNi steel 1.4404	1	40	5	1	146.42

### Geberit Pluvia outlet fastening

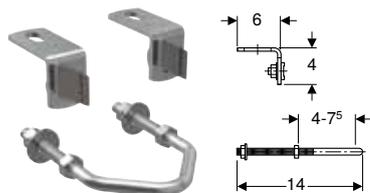

[click & scan](#)

#### Application purposes

- For installation inside buildings
- For Geberit Pluvia roof outlets with discharge rate of 12 l/s

#### Technical data

Product material	Steel
------------------	-------

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
358.829.00.1	5	1	24.98

### Geberit Pluvia noise reduction insert for roof outlets



[click & scan](#)

#### Application purposes

- For use with increased sound insulation requirements
- For Geberit Pluvia roof outlets with discharge rate of 9 l/s and 12 l/s
- For Geberit Pluvia roof outlets with discharge rate of 12 l/s, with branch discharge pipes  $\geq \varnothing 56$  mm
- For Geberit Pluvia roof outlets with discharge rate of 12 l/s, with vertical outlet
- For Geberit Pluvia roof outlets with discharge rate of 12 l/s, without fire protection requirements
- Not suitable for bendable Geberit Pluvia connection pipes

#### Technical data

Product material	Steel / plastic
------------------	-----------------

#### Characteristics


- Can be retrofitted
- Corrugated pipe can be shortened

#### Scope of delivery

- Function disc with air nozzle and corrugated pipe
- Gravel ring

Art. no.	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.126.00.1	34	1	252.42

### Geberit Pluvia supplementary set, suitable for parking decks

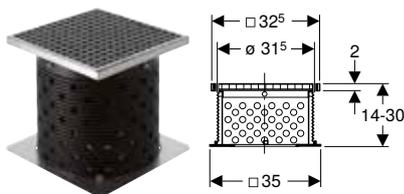

click & scan

#### Application purposes

- For green roofs
- For Geberit Pluvia roof outlets with discharge rate of 12 l/s
- For Geberit Pluvia roof outlets with discharge rate of 25 l/s
- For later construction of roofs in the case of inverted, drivable or green roofs

#### Characteristics

- Can bear loads of up to 1500 kg

#### Scope of delivery


- Grating
- Top piece with grating frame
- Force distribution plate
- Duct pipe can be cut to length
- Fastening material

#### Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Art. no.	d, Ø [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.635.00.1	315	12	1	371.18

### Geberit Pluvia supplementary set, suitable for promenade decks

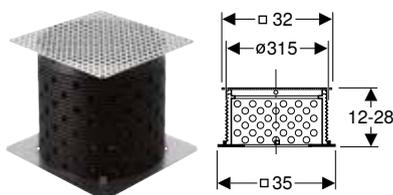

click & scan

#### Application purposes

- For green roofs
- For Geberit Pluvia roof outlets with discharge rate of 12 l/s
- For Geberit Pluvia roof outlets with discharge rate of 25 l/s
- For later construction of roofs in the case of inverted, walkable or green roofs

#### Characteristics

- Can bear loads of up to 300 kg

#### Scope of delivery

- Punched plate grating
- Duct pipe can be cut to length
- Force distribution plate
- Fastening material

#### Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Art. no.	d, Ø [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.504.00.1	315	12	1	170.27

### Geberit Pluvia set of mounting clips for function disc



click & scan

#### Application purposes


- For fixing of the Geberit Pluvia function disc without outlet grating
- Exclusively suitable for use with Geberit Pluvia supplementary sets, suitable for parking decks or promenade decks

#### Scope of delivery

- Set of 2 pieces

Art. no.	SU1 [pc.]	GBP/pc.
358.060.00.1	1	43.72

## Geberit Pluvia gravel ring

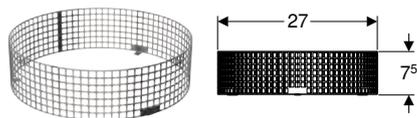

click & scan

### Application purposes

- For holding back roof gravel with a grain size of 8–16 mm
- For combining with Geberit Pluvia outlet gratings 12 and 25 l/s
- Not suitable for Geberit Pluvia roof outlets with outlet grating made of aluminium cast
- Not suitable for Geberit Pluvia roof outlets with outlet grating, grating aperture 8 x 2 cm

### Technical data

Product material	CrNi steel 1.4301 (EN 10088)
------------------	------------------------------

Art. no.	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.124.00.1	34	1	45.98

## Geberit Pluvia storm set



click & scan

### Application purposes


- For stormproof fastening of Geberit Pluvia outlet gratings with discharge rate of 12–14 l/s
- For stormproof fastening of Geberit Pluvia emergency overflows with discharge rate of 12–14 l/s

### Scope of delivery

- 2 mounting clips
- 4 washers
- 2 fastening screws
- 2 cap nuts

Art. no.	SU1 [pc.]	GBP/pc.
358.012.00.1	1	78.42

## Geberit Pluvia thermal insulation

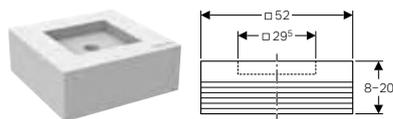

click & scan

### Application purposes

- For Geberit Pluvia roof outlets with discharge rate of 12 l/s
- For inverted roofs for thermal insulation

### Characteristics

- Height-adjustable in steps of 2 cm

### Technical data

Thermal conductivity, insulation	0.032 W/(m·K)
----------------------------------	---------------

Art. no.	d, $\varnothing$ [mm]	B [cm]	H [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.123.00.1	56	52	28	12	1	154.73



## For fastenings

### Geberit Pluvia support set



click & scan

#### Application purposes

- For horizontal pipe fixations
- For pipes  $\varnothing$  90–125 mm where the support rail is suspended more than 60 cm
- For pipes  $\varnothing$  160–200 mm where the support rail is suspended more than 30 cm
- For fastening to Geberit Pluvia support rails with square profile
- For later installation
- For additional support of Geberit Pluvia fastening systems in unfavourable boundary conditions

#### Scope of delivery

- 2 articulated joints M10 for threaded pipe G 1/2"
- Suspension element with long thread coupling M10
- Tension wedge
- Mounting plate with threaded socket M10

#### Characteristics

- Articulated joint rotatable by 180°
- Zinc-plated

Art. no.	DN	d, $\varnothing$ [mm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
358.061.00.1	90–200	90–200	640	10	1	63.71

#### To order additionally

- Threaded pipe G 1/2", L200, zinc-plated (art.no 362.852.26.1)

### Geberit Pluvia support set



click & scan

#### Application purposes

- For horizontal pipe fixations
- For pipes  $\varnothing$  250–315 mm where the support rail is suspended more than 30 cm
- For fastening to Geberit Pluvia support rails with C-profile
- For later installation
- For additional support of Geberit Pluvia fastening systems in unfavourable boundary conditions

#### Scope of delivery

- 2 articulated joints M10 for threaded pipe G 1/2"
- Suspension element for C-profile with fastening material
- Mounting plate with threaded socket M10

#### Characteristics

- Articulated joint rotatable by 180°
- Zinc-plated

Art. no.	DN	d, $\varnothing$ [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
358.062.00.1	250–300	250–315	10	1	97.03

#### To order additionally

- Threaded pipe G 1/2", L200, zinc-plated (art.no 362.852.26.1)






# Conventional Roof Drainage Systems

Roof outlets .....	160
Vapour barrier elements.....	162
Accessories .....	163



## Roof outlets

### Geberit roof outlet with contact sheet

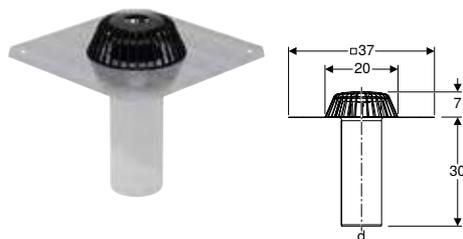

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For conventional roof drainage systems
- For connecting bituminous roof sealings

#### Technical data

Head of water max.	35 mm
--------------------	-------

#### Characteristics


- Vertical outlet
- Straight connector made of CrNi steel 1.4301, can be shortened

#### Scope of delivery

- Outlet grating made of PP
- Base unit with contact sheet made of CrNi steel 1.4301
- Protection box cover

Art. no.	DN	d, $\emptyset$ [mm]	Discharge rate [l/s]	SU1 [pc.]	GBP/pc.
359.038.00.1	90	90	5.5	1	143.82

### Geberit roof outlet set with contact sheet and vapour barrier connection

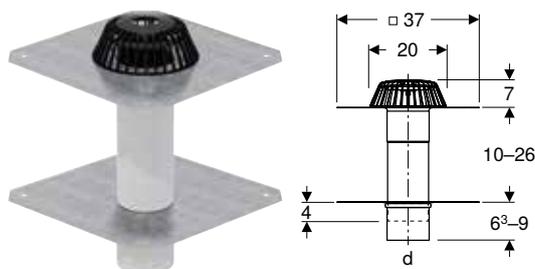

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For conventional roof drainage systems
- For connecting bituminous roof sealings
- For insulated roofs with vapour barrier
- For connecting vapour barriers made of plastic or bitumen

#### Technical data

Head of water max.	35 mm
--------------------	-------

#### Characteristics


- Vertical outlet
- Straight connector made of CrNi steel 1.4301, can be shortened

#### Scope of delivery

- Outlet grating made of PP
- Base unit with contact sheet made of CrNi steel 1.4301
- Vapour barrier connection made of CrNi steel 1.4301
- 2 protection box covers

Art. no.	DN	d, $\emptyset$ [mm]	Discharge rate [l/s]	SU1 [pc.]	GBP/pc.
358.024.00.1	90	90	5.5	1	306.37

### Geberit roof outlet with contact sheet

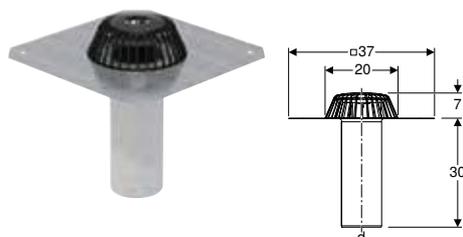

click & scan

#### Application purposes

- For collecting and draining off rainwater from roofs
- For conventional roof drainage systems
- For connecting bituminous roof sealings

#### Characteristics

- Vertical outlet
- Straight connector made of CrNi steel 1.4301, can be shortened

**Technical data**


Head of water max.	35 mm
--------------------	-------

**Scope of delivery**

- Outlet grating made of PP
- Base unit with contact sheet made of CrNi steel 1.4301
- Protection box cover

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	SU1 [pc.]	GBP/pc.
359.037.00.1	100	110	6	1	143.82

**Geberit roof outlet set with contact sheet and vapour barrier connection**

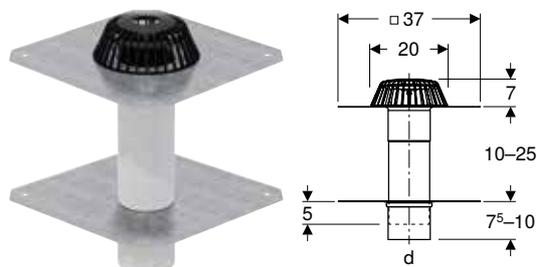

click & scan

**Application purposes**

- For collecting and draining off rainwater from roofs
- For conventional roof drainage systems
- For connecting bituminous roof sealings
- For insulated roofs with vapour barrier
- For connecting vapour barriers made of plastic or bitumen

**Characteristics**

- Vertical outlet
- Straight connector made of CrNi steel 1.4301, can be shortened

**Scope of delivery**

- Outlet grating made of PP
- Base unit with contact sheet made of CrNi steel 1.4301
- Vapour barrier connection made of CrNi steel 1.4301
- 2 protection box covers

**Technical data**

Head of water max.	35 mm
--------------------	-------

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	SU1 [pc.]	GBP/pc.
358.026.00.1	100	110	6	1	306.37

**Geberit roof outlet with fastening flange, for roof foils**



click & scan

**Application purposes**

- For conventional roof drainage systems
- For collecting and draining off rainwater from roofs
- For roof foils without fleece lamination
- For connecting to roof foils with thicknesses ≤ 4 mm

**Characteristics**

- Vertical outlet
- Straight connector made of PE-HD, can be shortened
- Maintenance-free clamping flange joint

**Scope of delivery**

- Outlet grating
- Base unit
- Flange gasket made of EPDM
- Fastening flange with prevailing torque nuts

**Technical data**


Head of water max.	35 mm
--------------------	-------

Art. no.	DN	d, ø [mm]	Discharge rate [l/s]	D [cm]	H [cm]	h [cm]	K [cm]	SU1 [pc.]	GBP/pc.
359.013.00.1	100	110	≤ 7	16	26.5	8	14	1	147.45



## Vapour barrier elements

### Geberit vapour barrier connection

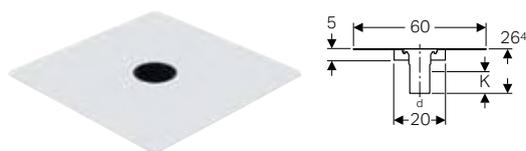

click & scan

#### Application purposes

- For insulated roofs with vapour barrier
- For conventional roof drainage systems
- For connecting vapour barriers made of plastic or bitumen

#### Technical data

Product material	Steel / plastic
------------------	-----------------

#### Characteristics


- Vertical outlet
- Straight connector permanently mounted,  $\varnothing$  110 mm, made of PE-HD
- Zinc-plated

#### Scope of delivery

- Protection box cover
- Anticondensation insulation

Art. no.	d, $\varnothing$ [mm]	K [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.147.00.1	110	14	6	1	288.67

### Geberit Pluvia vapour barrier connection

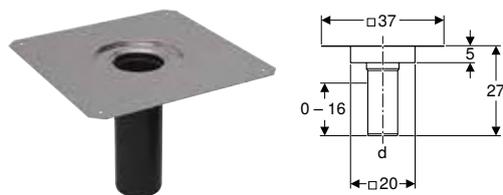

click & scan

#### Application purposes

- For Geberit Pluvia roof outlets with discharge rate of 25 l/s
- For syphonic roof drainage systems
- For conventional roof drainage systems
- For connecting vapour barriers made of plastic or bitumen
- For insulated roofs with vapour barrier

#### Technical data

Product material	Steel / plastic
------------------	-----------------

#### Characteristics

- Vertical outlet
- Straight connector can be reduced directly or extended
- Straight connector made of PE-HD, can be shortened

#### Scope of delivery

- Protection box cover
- Anticondensation insulation


Art. no.	DN	Sealing of connection	d, $\varnothing$ [mm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.102.00.1	90	CrNi steel 1.4301	90	12	1	198.85

#### Accessories

- Geberit Pluvia installation sheet → p. 152

## Accessories

### Geberit installation sheet

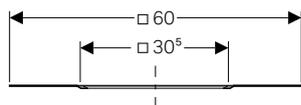

[click & scan](#)

#### Application purposes

- For Geberit roof outlet with fastening flange, for roof foils
- For fastening Geberit roof outlets with fastening flange, for roof foils on lightweight roofs

#### Scope of delivery

- 4 fastening screws

#### Characteristics

- Hot-dip galvanized

Art. no.	SU1	GBP/pc.
359.133.00.1	1	71.84





# Floor Drainage Systems

<b>Surface drainage systems for indoor and outdoor .....</b>	<b>166</b>
Floor drains 10 x 10 cm .....	166
Floor drains for balconies and terraces, 10 x 10 cm .....	167
Floor drains 13 x 13 cm .....	168
Floor drains for balconies and terraces, 13 x 13 cm .....	170
Floor drains 15 x 15 cm .....	170
Accessories .....	171





# Surface drainage systems for indoor and outdoor

## Floor drains 10 x 10 cm

**New**

### Geberit Varino pluggable floor drain, d125, slotted grating 10 x 10 cm



click & scan

#### Application purposes

- For discharge pipes made of PE-HD, PVC and PP with DN 125
- For use inside buildings
- For use as floor drain with vertical outlet
- For flooring, including flooring made of mono concrete

#### Technical data

Discharge rate with trap insert	1.1 l/s
Product material	PP

#### Characteristics

- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)
- Integrated silicone diaphragm to extend drying-out time

#### Scope of delivery

- Top piece with grating frame and slotted grating
- Trap insert
- Premounted sleeve
- Ring for installation in mono concrete

Art. no.	d, ø [mm]	Discharge rate [l/s]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.061.00.1	97	1.1	60	5	1	277.80



Available as of April 2026

#### Accessories

- Geberit flange for pluggable floor drain, 10 x 10 cm → p. 171

**New**

### Geberit Varino pluggable floor drain, d110, slotted grating 10 x 10 cm



click & scan

#### Application purposes

- For discharge pipes made of PE-HD, PVC and PP with DN 100
- For use inside buildings
- For use as floor drain with vertical outlet
- For flooring, including flooring made of mono concrete

#### Technical data

Discharge rate with trap insert	1.1 l/s
Product material	PP

#### Characteristics

- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)
- Integrated silicone diaphragm to extend drying-out time

#### Scope of delivery

- Top piece with grating frame and slotted grating
- Trap insert
- Premounted sleeve
- Ring for installation in mono concrete

Art. no.	d, ø [mm]	Discharge rate [l/s]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.060.00.1	97	1.1	60	5	1	253.36


Available as of April 2026

**Accessories**

- Geberit flange for pluggable floor drain, 10 x 10 cm → p. 171

## Floor drains for balconies and terraces, 10 x 10 cm

### Geberit contact sheet with protective cap, tin-plated

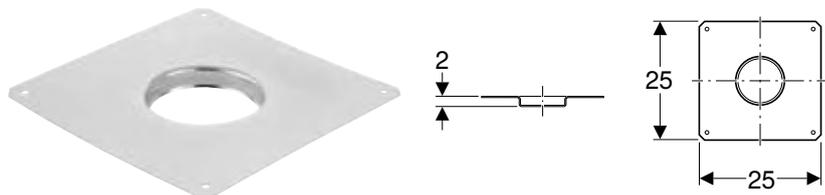

click & scan

**Application purposes**

- For Geberit floor drains, outlet vertical

**Characteristics**

- Tin-plated

**Technical data**


Product material	Stainless steel
------------------	-----------------

**Scope of delivery**

- Protective cap

Art. no.	Colour / surface	Sealing of connection	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.123.24.1	tin-plated	CrNi steel, tin-plated	10	1	68.01

### Geberit contact sheet with protective cap, coated

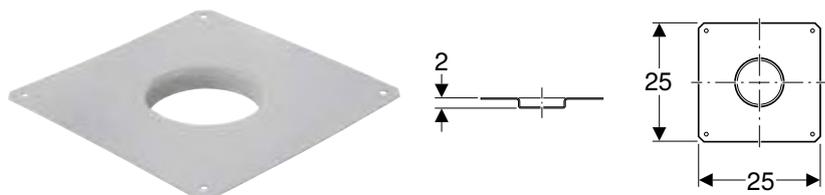

click & scan

**Application purposes**

- For Geberit floor drains, outlet vertical

**Characteristics**

- PVC-coated

**Technical data**

Product material	Stainless steel
------------------	-----------------

**Scope of delivery**


- Protective cap

Art. no.	Colour / surface	Sealing of connection	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.124.28.1	plastic-coated	CrNi steel, PVC-coated	10	1	74.72



## Floor drains 13 x 13 cm

### Geberit Varino floor drain, horizontal, d50

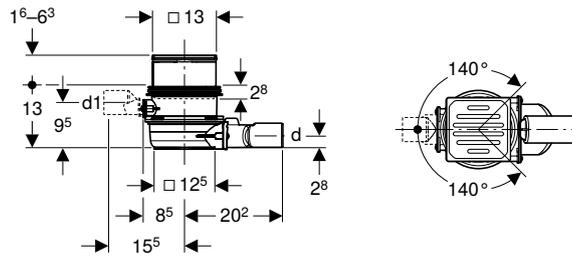

click & scan

#### Application purposes

- For connecting sanitary appliances
- For use inside buildings
- For use as floor drain with horizontal outlet

#### Technical data

Inlet capacity	0.6 l/s
Discharge rate at 20 mm head of water	1 l/s
Discharge rate at 10 mm head of water	0.7 l/s
Depth of water seal (mm)	50 mm
Product material	PE

#### Characteristics


- Quality-monitored in accordance with EN 1253-3
- Inlet rotatable by 280°
- Inlet closed
- Inlet for connecting one sanitary appliance
- Height-adjustable with extension piece
- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

#### Scope of delivery

- Inlet connection piece made of PE-HD, ø 50 mm
- Outlet made of HDPE, ø 50 mm
- Stainless steel grating
- Trap insert
- Protection box

Art. no.	d, ø [mm]	Discharge rate [l/s]	d1, ø [mm]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.023.00.1	50	0.7	50	28.7	14.6–19.3	5	1	303.74

### Geberit Varino floor drain, horizontal, d56/63

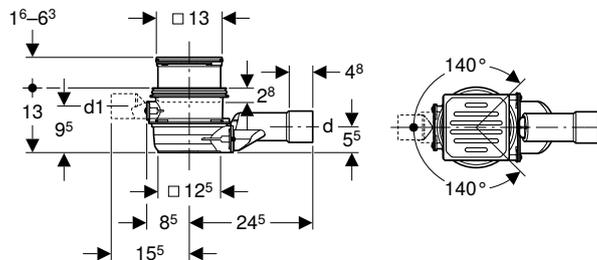

click & scan

#### Application purposes

- For connecting sanitary appliances
- For use inside buildings
- For use as floor drain with horizontal outlet

#### Technical data

Inlet capacity	0.6 l/s
Discharge rate at 20 mm head of water	1 l/s
Discharge rate at 10 mm head of water	0.7 l/s
Depth of water seal (mm)	50 mm
Product material	PE

#### Characteristics


- Quality-monitored in accordance with EN 1253-3
- Inlet rotatable by 280°
- Inlet closed
- Inlet for connecting one sanitary appliance
- Height-adjustable with extension piece
- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

#### Scope of delivery

- Inlet connection piece made of PE-HD, ø 50 mm
- Outlet made of PE-HD, ø 56 / 63 mm
- Stainless steel grating
- Trap insert
- Protection box

Art. no.	d, ø [mm]	Discharge rate [l/s]	d1, ø [mm]	L [cm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.020.00.1	56 / 63	0.7	50	33	14.6–19.3	60	5	1	303.74

## Geberit Varino floor drain, horizontal, d110

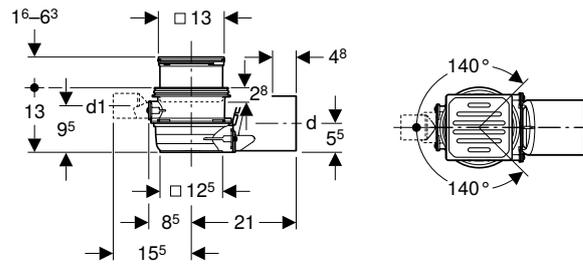

click & scan

### Application purposes

- For connecting sanitary appliances
- For use inside buildings
- For use as floor drain with horizontal outlet

### Technical data

Inlet capacity	0.8 l/s
Discharge rate at 20 mm head of water	1.4 l/s
Discharge rate at 10 mm head of water	0.8 l/s
Depth of water seal (mm)	50 mm
Product material	PE

### Characteristics


- Quality-monitored in accordance with EN 1253-3
- Inlet rotatable by 280°
- Inlet closed
- Inlet for connecting one sanitary appliance
- Height-adjustable with extension piece
- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

### Scope of delivery

- Inlet connection piece made of PE-HD,  $\varnothing$  50 mm
- Outlet made of PE-HD,  $\varnothing$  110 mm
- Stainless steel grating
- Trap insert
- Protection box

Art. no.	d, $\varnothing$ [mm]	Discharge rate [l/s]	d1, $\varnothing$ [mm]	L [cm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.021.00.1	110	0.8	50	29.5	14.6-19.3	60	5	1	319.87

## Geberit Varino floor drain, vertical, d110

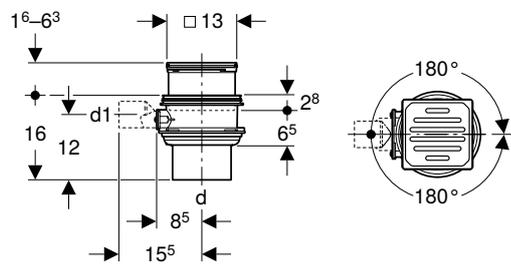

click & scan

### Application purposes

- For connecting sanitary appliances
- For use inside buildings
- For use as floor drain with vertical outlet

### Technical data

Inlet capacity	0.8 l/s
Discharge rate at 20 mm head of water	1.6 l/s
Discharge rate at 10 mm head of water	0.7 l/s
Depth of water seal (mm)	50 mm
Product material	PE

### Characteristics

- Quality-monitored in accordance with EN 1253-3
- Inlet rotatable by 360°
- Inlet closed
- Inlet for connecting one sanitary appliance
- Height-adjustable with extension piece
- Trap insert can be removed without tools
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)

### Scope of delivery

- Inlet connection piece made of PE-HD,  $\varnothing$  50 mm
- Outlet made of PE-HD,  $\varnothing$  110 mm
- Stainless steel grating
- Trap insert
- Protection box

Art. no.	d, $\varnothing$ [mm]	Discharge rate [l/s]	d1, $\varnothing$ [mm]	H [cm]	SU4 [pc.]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.022.00.1	110	0.7	50	14.6-19.3	60	5	1	192.33




## Floor Drainage Systems

Surface drainage systems for indoor and outdoor  
Floor drains 15 x 15 cm

### Floor drains for balconies and terraces, 13 x 13 cm

#### Geberit Varino floor drain, horizontal, d50



click & scan

#### Application purposes

- For balconies and patios
- For the outdoor area
- For use as floor drain with horizontal outlet

#### Technical data

Discharge rate with trap insert	0.6 l/s
Product material	PE

#### Characteristics

- Height-adjustable with extension piece
- Not affected by frost when trap insert is removed
- Not trapped
- Shockproof
- Resistant to chemicals
- Load-bearing capacity, class K 3 (3 kN)


#### Scope of delivery

- Outlet made of HDPE,  $\varnothing$  50 mm
- Stainless steel grating
- Protection box

Art. no.	DN	d, $\varnothing$ [mm]	Discharge rate [l/s]	L [cm]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
388.032.00.1	50	50	0.9	19.6	8.6-13.6	12	1	156.34

### Floor drains 15 x 15 cm

#### Geberit HDPE floor drain, slotted grating 15 x 15 cm

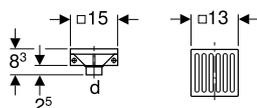

click & scan

#### Application purposes

- For use inside buildings
- For use outside buildings
- For use as floor drain with vertical outlet

#### Technical data

Product material	PE-HD
------------------	-------

#### Characteristics

- Drivable up to 1 t
- Not trapped
- Moisture protection cannot be attached

#### Scope of delivery


- Base unit
- Cast iron grating

Art. no.	DN	d, $\varnothing$ [mm]	Discharge rate [l/s]	H [cm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
361.666.16.1	50	50	1.2	8.3	12	1	77.85

## Accessories

**New**

### Geberit flange for pluggable floor drain, 10 x 10 cm

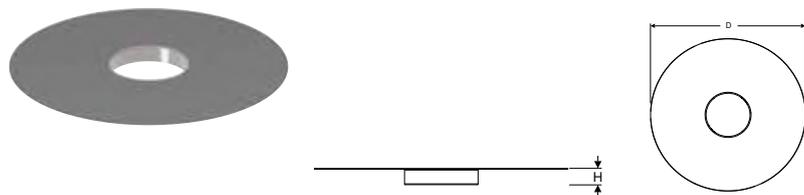

click & scan

#### Application purposes

- For connecting moisture sealings with liquid plastic
- For connecting moisture sealings with sealing slurry
- For connecting moisture sealings with bitumen

#### Technical data

Product material	Stainless steel
------------------	-----------------

Art. no.	D [cm]	H [cm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
388.137.00.1	31	2	18	1	114.65

Available as of April 2026





# Tools

<b>Tools for Geberit Silent-db20 / Geberit HDPE.....</b>	<b>174</b>
Accessories for electrofusion welding tools .....	174
Butt welding tools .....	175
Assortment overview – Geberit butt welding tools.....	175
Accessories for butt-welding tools .....	179
Assortment overview – Geberit hand-operated and electrical planes .....	179
Pipe processing tools .....	191
Accessories for pipe processing tools.....	195



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Accessories for electrofusion welding tools

# Tools for Geberit Silent-db20 / Geberit HDPE

## Accessories for electrofusion welding tools

### Geberit pressure ring



[click & scan](#)

#### Application purposes

- For pressing pipes and fittings when welding electrofusion couplings with integrated thermal fuse

Art. no.	d, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
356.100.00.1	200	1	435.26
356.102.00.1	250	1	515.60
356.103.00.1	315	1	530.15

### Geberit accessories set for electrofusion with integrated thermal fuse



[click & scan](#)

#### Application purposes

- For welding of Geberit electrofusion couplings with integrated thermal fuse of dimensions  $\emptyset$  200–315 mm

#### Scope of delivery





- 2 pressure rings,  $\emptyset$  200 mm
- 2 pressure rings,  $\emptyset$  250 mm
- 2 pressure rings,  $\emptyset$  315 mm
- Pipe cutter,  $\emptyset$  200–315 mm
- Deburring knife
- Scraper
- Grease pencil, yellow
- Folding rule
- Transport case made of wood

Art. no.	d, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
356.116.00.1	200–315	1	4883.91

## Butt welding tools

### Assortment overview – Geberit butt welding tools

Geberit Great Britain, Version: December 2025






		Geberit Media welding machine	Geberit Universal welding machine	
		359.662.00.1	356.203.00.1	356.201.00.1
				
<b>Included in scope of delivery</b>				
359.778.00.1 Geberit welding plate lever for welding machines Media and Universal for welding plate KSS-160 / KSS-200		✓	✓	✓
357.800.00.1 Geberit set of pipe supports d50–160, for Media and Universal welding machines		✓	✓	✓
357.449.00.1 Geberit set of pipe supports d200, for welding machine Universal			✓	✓
356.831.00.1 Geberit base for Media and Universal welding machines		✓	✓	✓
358.729.00.1 Geberit pipe support, swivelling, for Media and Universal welding machines		✓	✓	✓
242.462.00.1 Geberit pipe support, swivelling, for Media and Universal welding machines			✓	✓
359.663.00.1 Geberit Media transport case, empty		✓		
359.797.00.1 Geberit hand-operated plane d40–160				
359.814.00.1 Geberit set of tension devices				
<b>Tools to order additionally (selection)</b>				
Geberit hand-operated plane d40–160	HM, d40-160 	359.797.00.1	359.797.00.1	359.797.00.1
	HSS, d40-160 	359.799.00.1	359.799.00.1	359.799.00.1
Geberit electric plane d40–160, 230 V	HSS 	359.046.xx.2	359.046.xx.2	359.046.xx.2
Geberit electric plane d40–160, 110 V	HSS 	359.046.1P.2	359.046.1P.2	359.046.1P.2
Geberit electric plane d40–160, 230 V	HM 	359.047.xx.2	359.047.xx.2	359.047.xx.2
Geberit electric plane d40–200, 230 V	HSS 	-	359.082.xx.2	359.082.xx.2
	HM 	-	359.084.xx.2	359.084.xx.2
Geberit electric plane d200–315, 230 V	HSS 	-	359.060.xx.2	359.060.xx.2






## Tools

### Tools for Geberit Silent-db20 / Geberit HDPE Butt welding tools

Geberit Great Britain, Version: December 2025

		Geberit Media welding machine	Geberit Universal welding machine	
		359.662.00.1	356.203.00.1	356.201.00.1
				
Geberit KSS-160 welding plate, 230 V		359.641.xx.2	359.641.xx.2	359.641.xx.2
Geberit KSS-160 welding plate, 120 V		359.641.1P.2	359.641.1P.2	359.641.1P.2
Geberit KSS-200 welding plate, 230 V		-	359.665.xx.2	359.665.xx.2
Geberit KSS-200 welding plate, 120 V		-	359.665.1P.2	359.665.1P.2
Geberit KSS-315 welding plate, 230 V		-	359.675.xx.2	359.675.xx.2
Geberit welding plate holder for KSS-160 / KSS-200 welding plate		359.886.00.2	359.886.00.2	359.886.00.2
Geberit welding plate holder for Universal welding machine for KSS-315 welding plate		-	359.673.00.1	359.673.00.1
Geberit leather protection case	For KSS-200 	-	359.696.00.1	359.696.00.1
Geberit set of tension devices		359.8xx.00.1	359.8xx.00.1	359.8xx.00.1
Geberit set of jaw adaptors with tension device d110		359.059.00.1	359.059.00.1	359.059.00.1
Geberit set of jaw adaptors for tension device d110		359.05x.00.1	359.05x.00.1	359.05x.00.1
Geberit set of tension devices		-	359.884.00.1	359.884.00.1
Geberit set of tension devices		-	359.83x.00.1	359.83x.00.1
Geberit pipe support prism d200–315, for welding machine Universal		-	359.691.00.1	359.691.00.1
Geberit set of support forks for Media and Universal welding machines		359.804.00.1	359.804.00.1	359.804.00.1
		359.807.00.1	359.807.00.1	359.807.00.1
Geberit pipe support, swivelling, for Media and Universal welding machines		242.462.00.1	242.462.00.1	242.462.00.1

Geberit Great Britain, Version: December 2025

		Geberit Media welding machine	Geberit Universal welding machine	
		359.662.00.1	356.203.00.1	356.201.00.1
				
Geberit Media transport case, empty		359.663.00.1	-	-
Geberit transport case for KSS-160, empty		359.683.00.1	359.683.00.1	359.683.00.1

## Geberit Media welding machine



click & scan

### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings

### Characteristics

- Robust base element for welding accessories up to  $\varnothing$  160 mm
- Retainer for welding plate lever and plane

### Scope of delivery

- 2 pipe support prism  $\varnothing$  50–160 mm
- Pipe supports,  $\varnothing$  75–125 mm
- Welding plate lever
- Transport case made of wood

Art. no.	d, $\varnothing$ [mm]	L [cm]	B [cm]	H [cm]	Weight of main element [kg]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
359.662.00.1	40–160	84	41	43	25.2	2	1	3341.67



- Plane and hot plate to be ordered separately



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Butt welding tools

### Geberit Universal welding machine



click & scan

#### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings

#### Characteristics

- Robust base element for welding accessories up to  $\varnothing$  315 mm
- Retainer for welding plate lever and plane
- Welding plate lever, swivelling
- Support, swivelling
- Clamping carriage, movable
- Hand wheel

#### Scope of delivery

- 2 pipe support prism  $\varnothing$  50–160 mm
- Pipe support  $\varnothing$  75–125 mm, with base
- 2 underlays  $\varnothing$  200 mm
- Welding plate lever

Art. no.	d, $\varnothing$ [mm]	L [cm]	B [cm]	H [cm]	SU1 [pc.]	GBP/pc.
356.203.00.1	40–315	77	43	43.5	1	4492.27

#### To order additionally

- Welding plate
- Welding accessories,  $\varnothing$  200–315 mm
- Tension devices
- Hand-operated or electric plane

### Geberit Universal welding machine



click & scan

#### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings

#### Characteristics

- Robust base element for welding accessories up to  $\varnothing$  315 mm
- Retainer for welding plate lever and plane

#### Scope of delivery

- 2 pipe support prism  $\varnothing$  50–160 mm
- Pipe support  $\varnothing$  75–125 mm, with base
- 2 underlays  $\varnothing$  200 mm
- Welding plate lever
- Accessories case made of wood

Art. no.	d, $\varnothing$ [mm]	L [cm]	B [cm]	H [cm]	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
356.201.00.1	40–315	77	43	43.5	74	1	5655.07



- Plane and hot plate to be ordered separately

## Accessories for butt-welding tools

### Assortment overview – Geberit hand-operated and electrical planes

Geberit Great Britain, Version: December 2025

	Geberit hand-operated plane d40-160		Geberit electric plane d40-160, 230 V		Geberit electric plane d40-160, 110 V	Geberit electric plane d40-200, 230 V		Geberit electric plane d200-315, 230 V

Dimension	d40-160				d40-200			d200-315
HSS <sup>1)</sup>	359.799.00.1		359.046.P2.2 359.046.P5.2		359.046.1P.1	359.082.P2.2 359.082.P5.2		359.060.P2.2 359.060.P5.2
HM <sup>2)</sup>		359.797.00.1		359.047.P2.2			359.084.P2.2	

#### Accessories

##### Blade, HSS <sup>1)</sup>

358.759.00.1	2 x	2 x	1 x	1 x	1 x	-	-	-
358.760.00.1								
358.759.00.1								
358.760.00.1	-	-	-	-	-	1 x	1 x	-
357.600.00.1								
357.599.00.1								
357.751.00.1	-	-	-	-	-	-	-	2 x

##### Blade, HM <sup>3)</sup>

240.474.00.1	2 x	2 x	1 x	1 x	1 x	2 x	2 x	-
--------------	-----	-----	-----	-----	-----	-----	-----	---

<sup>1)</sup> For Geberit HDPE

<sup>2)</sup> For Geberit HDPE and Geberit Silent-db20

<sup>3)</sup> For Geberit HDPE and Geberit Silent-db20, set of 2 pieces

## Geberit KSS-160 welding plate, 230 V



click & scan

#### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings up to  $\varnothing$  160 mm
- For Media and Universal welding machines

#### Technical data

Nominal voltage	230 V AC
Mains frequency	50-60 Hz

#### Characteristics

- With automatic temperature regulation
- With operating display
- PTFE-coated
- CE-compliant

#### Scope of delivery

- Welding plate holder

Art. no.	d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.641.P5.2	40-160	800	BS 1363 A	2.901	1	508.65

#### Accessories

- Geberit transport case for KSS-160, empty → p. 190



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Accessories for butt-welding tools

### Geberit KSS-160 welding plate, 120 V



[click & scan](#)

#### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings up to  $\varnothing$  160 mm
- For Media and Universal welding machines

#### Technical data

Nominal voltage	120 V AC
Mains frequency	50–60 Hz

#### Characteristics

- With automatic temperature regulation
- With operating display
- PTFE-coated
- CE-compliant

#### Scope of delivery

- Welding plate holder

Art. no.	d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.641.1P.2	40–160	800	CEE 17 4h, yellow	2.95	1	557.02

#### Accessories

- Geberit transport case for KSS-160, empty → p. 190

### Geberit KSS-200 welding plate, 230 V



[click & scan](#)

#### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings up to  $\varnothing$  200 mm
- For Universal welding machines

#### Technical data

Nominal voltage	230 V AC
Mains frequency	50–60 Hz

#### Characteristics

- With automatic temperature regulation
- With operating display
- PTFE-coated
- CE-compliant

Art. no.	d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.665.P5.2	40–200	1300	BS 1363 A	3.8	1	806.85

#### Accessories

- Geberit welding plate holder for KSS-160 / KSS-200 welding plate → p. 181
- Geberit leather protection case → p. 190

### Geberit KSS-200 welding plate, 120 V



[click & scan](#)

#### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings up to  $\varnothing$  200 mm
- For Universal welding machines

#### Technical data

Nominal voltage	120 V AC
Mains frequency	50–60 Hz

#### Characteristics

- With automatic temperature regulation
- With operating display
- PTFE-coated
- CE-compliant

Art. no.	d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.665.1P.2	40–200	1300	CEE 17 4h, yellow	4.085	1	580.36

#### Accessories

- Geberit welding plate holder for KSS-160 / KSS-200 welding plate → p. 181
- Geberit leather protection case → p. 190

## Geberit KSS-315 welding plate, 230 V



[click & scan](#)

### Application purposes

- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings  $\varnothing$  200–315 mm
- For Universal welding machines

### Characteristics

- With automatic temperature regulation
- With operating display
- PTFE-coated
- CE-compliant

### Technical data

Nominal voltage	230 V AC
Mains frequency	50–60 Hz

Art. no.	d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.675.P5.2	200–315	1300	BS 1363 A	6.68	1	1307.85

### Accessories

- Geberit welding plate holder for Universal welding machine for KSS-315 welding plate → p. 181

## Geberit welding plate holder for Universal welding machine for KSS-315 welding plate



[click & scan](#)

### Application purposes

- For welding plate  $\varnothing$  200–315 mm in combination with Universal welding machines

Art. no.	SU1 [pc.]	GBP/pc.
359.673.00.1	1	411.41

## Geberit welding plate holder for KSS-160 / KSS-200 welding plate



[click & scan](#)

### Application purposes

- For KSS-160 and KSS-200 welding plates

Art. no.	SU1 [pc.]	GBP/pc.
359.886.00.2	1	79.37



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Accessories for butt-welding tools

### Geberit welding plate lever for welding machines Media and Universal for welding plate KSS-160 / KSS-200



click & scan

#### Application purposes

- For receiving the welding plate

Art. no.

SU1 GBP/pc.  
[pc.]

359.778.00.1

1 472.09

### Geberit electric plane d40–160, 230 V



click & scan

#### Application purposes

- For processing Geberit HDPE
- For Media and Universal welding machines
- For pipes and fittings  $\varnothing$  40–160 mm

#### Characteristics

- With high-speed steel blade
- CE-compliant

#### Technical data

Nominal voltage	230 V AC
Mains frequency	50–60 Hz

Art. no.		d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.046.P2.1	P	40–160	750	CEE 7/17	5.894	1	2493.37
359.046.P5.2	N	40–160	600	BS 1363 A	6.5	1	1768.08

N: New, available as of January 2026; P: Phase out

#### Accessories

- Geberit plane blade made of HSS, for electric plane d40–160/d40–200 → p. 185



- Replacement for art. no. 359.046.P2.1

### Geberit electric plane d40–160, 110 V



click & scan

#### Application purposes

- For processing Geberit HDPE
- For Media and Universal welding machines
- For pipes and fittings  $\varnothing$  40–160 mm

#### Characteristics

- With high-speed steel blade
- CE-compliant

#### Technical data

Nominal voltage	110 V AC
Mains frequency	50–60 Hz

Art. no.	d, ø [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.046.1P.1	40-160	750	CEE 17 4h, yellow	5.973	1	1998.49

#### Accessories

- Geberit plane blade made of HSS, for electric plane d40-160/d40-200 → p. 185

## Geberit electric plane d40-160, 230 V



click & scan

#### Application purposes

- For Media and Universal welding machines
- For processing Geberit HDPE and Geberit Silent-db20
- For pipes and fittings ø 40-160 mm

#### Characteristics

- With plane blade made of hard metal
- CE-compliant

#### Technical data

Nominal voltage	230 V AC
Mains frequency	50-60 Hz

Art. no.		d, ø [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.047.P2.1	P	40-160	750	CEE 7/17	5.611	1	2493.37

N: New, available as of January 2026; P: Phase out

#### Accessories

- Geberit set of plane blades made of HM, for hand-operated plane d40-160 and electric plane d40-160/d40-200 → p. 186



- Replacement for art. no. 359.047.P2.1

## Geberit electric plane d40-200, 230 V



click & scan

#### Application purposes

- For processing Geberit HDPE
- For Universal welding machines
- For pipes and fittings ø 40-200 mm

#### Characteristics

- With high-speed steel blade
- CE-compliant

#### Technical data

Nominal voltage	230 V AC
Mains frequency	50-60 Hz

Art. no.		d, ø [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.082.P2.1	P	40-200	750	CEE 7/17	6.303	1	3598.68
359.082.P5.2	N	40-200	600	BS 1363 A	6.22	1	2519.39

N: New, available as of January 2026; P: Phase out

#### Accessories

- Geberit plane blade made of HSS, for electric plane d40-160/d40-200 → p. 185



- Replacement for art. no. 359.082.P2.1



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Accessories for butt-welding tools

### Geberit electric plane d40–200, 230 V



click & scan

#### Application purposes

- For processing Geberit HDPE and Geberit Silent-db20
- For butt welding Geberit HDPE and Geberit Silent-db20 pipes and fittings up to  $\varnothing$  200 mm
- For Universal welding machines
- For pipes and fittings  $\varnothing$  40–200 mm

#### Characteristics

- With plane blade made of hard metal
- CE-compliant

#### Technical data

Nominal voltage	230 V AC
Mains frequency	50–60 Hz

Art. no.		d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.084.P2.1	P	40–200	750	CEE 7/17	6.02	1	3598.68

P: Phase out

#### Accessories

- Geberit set of plane blades made of HM, for hand-operated plane d40–160 and electric plane d40–160/d40–200 → p. 186



- Replacement for art. no. 359.084.P2.1

### Geberit electric plane d200–315, 230 V



click & scan

#### Application purposes

- For processing Geberit HDPE
- For pipes and fittings  $\varnothing$  200–315 mm

#### Characteristics

- With high-speed steel blade
- CE-compliant

#### Technical data

Nominal voltage	230 V AC
Mains frequency	50–60 Hz

Art. no.		d, $\varnothing$ [mm]	Power consumption [W]	Plug type	Weight of main element [kg]	SU1 [pc.]	GBP/pc.
359.060.P2.1	P	200–315	550	CEE 7/17	11.593	1	4248.50
359.060.P2.2	N	200–315	600	CEE 7/17	11.593	1	3348.63

N: New, available as of January 2026; P: Phase out

#### Accessories

- Geberit plane blade for electric plane d200–315 → p. 186



- Replacement for art. no. 359.060.P2.1

## Geberit hand-operated plane d40-160



[click & scan](#)

### Application purposes

- For Media and Universal welding machines
- For processing Geberit HDPE and Geberit Silent-db20
- For pipes and fittings  $\varnothing$  40-160 mm

### Characteristics

- With plane blade made of hard metal

Art. no.	d, $\varnothing$ [mm]	SU1 [pc.]	GBP/pc.
359.797.00.1	40-160	1	1370.94

### Accessories

- Geberit set of plane blades made of HM, for hand-operated plane d40-160 and electric plane d40-160/d40-200 → p. 186

## Geberit hand-operated plane d40-160



[click & scan](#)

### Application purposes

- For processing Geberit HDPE
- For Media and Universal welding machines
- For pipes and fittings  $\varnothing$  40-160 mm

### Characteristics

- With high-speed steel blade

Art. no.	d, $\varnothing$ [mm]	SU1 [pc.]	GBP/pc.
359.799.00.1	40-160	1	1285.23

### Accessories

- Geberit plane blade made of HSS, for electric plane d40-160/d40-200 → p. 185

## Geberit plane blade made of HSS, for electric plane d40-160/d40-200



[click & scan](#)

### Application purposes

- For Geberit HDPE pipes and fittings

Art. no.	d, $\varnothing$ [mm]	Blade	SU2 [pc.]	SU1 [pc.]	GBP/pc.
357.599.00.1	200	right, ground	20	1	25.76
357.600.00.1	200	left, ground	20	1	25.76
358.759.00.1	40-200	left	20	1	25.76
358.760.00.1	40-200	right	20	1	25.76

### To order additionally

- Zinc-plated countersunk screws M3 x 6-8.8 (commercial standard)



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Accessories for butt-welding tools

### Geberit set of plane blades made of HM, for hand-operated plane d40–160 and electric plane d40–160/d40–200



[click & scan](#)

#### Application purposes

- For Geberit HDPE and Geberit Silent-db20 pipes and fittings

#### Scope of delivery

- Plane blade, left
- Plane blade, right
- 6 screws

Art. no.	d, $\varnothing$ [mm]	SU2 [pc.]	SU1 [pc.]	GBP/pc.
240.474.00.1	40–200	10	1	149.56

### Geberit plane blade for electric plane d200–315



[click & scan](#)

#### Application purposes

- For Geberit electric planes from  $\varnothing$  200–315 mm

Art. no.	SU2 [pc.]	SU1 [pc.]	GBP/pc.
357.751.00.1	20	1	51.41

#### To order additionally

- Zinc-plated countersunk screws M3 x 6–8.8 (commercial standard)

### Geberit set of jaw adaptors with tension device d110



[click & scan](#)

#### Application purposes

- For Media and Universal welding machines
- For tensioning pipes and fittings with tension devices  $\varnothing$  110 mm

#### Characteristics

- Hard-anodised jaw adaptors
- Magnet holder
- With twist lock

#### Scope of delivery

- Set of jaw adaptors  $\varnothing$  50 mm, 4 pieces, for tension devices  $\varnothing$  110 mm, with magnet holder
- Set of jaw adaptors  $\varnothing$  56 mm, 4 pieces, for tension devices  $\varnothing$  110 mm, with magnet holder
- Set of jaw adaptors  $\varnothing$  63 mm, 4 pieces, for tension devices  $\varnothing$  110 mm, with magnet holder
- Set of jaw adaptors  $\varnothing$  75 mm, 4 pieces, for tension devices  $\varnothing$  110 mm, with magnet holder
- Set of jaw adaptors  $\varnothing$  90 mm, 4 pieces, for tension devices  $\varnothing$  110 mm, with magnet holder
- Tension device set,  $\varnothing$  110 mm, 2 pieces, with magnet holder
- Case

Art. no.	SU1 [pc.]	GBP/pc.
359.059.00.1	1	2481.20

## Geberit set of jaw adaptors for tension device d110



[click & scan](#)

### Application purposes

- For Media and Universal welding machines
- For tensioning pipes and fittings with tension devices  $\varnothing$  110 mm
- For use in tension devices  $\varnothing$  110 mm with magnet holder (from year of manufacture 2013)

### Scope of delivery

- Set of 4 pieces

### Characteristics

- Hard-anodised jaw adaptors
- Magnet holder
- With twist lock

Art. no.	d, $\varnothing$ [mm]	SU1 [pc.]	GBP/pc.
359.052.00.1	50 / 110	1	291.00
359.053.00.1	56 / 110	1	291.00
359.054.00.1	63 / 110	1	291.00
359.056.00.1	75 / 110	1	291.00
359.057.00.1	90 / 110	1	291.00

## Geberit set of tension devices



[click & scan](#)

### Application purposes

- For Media and Universal welding machines
- For tensioning pipes and fittings

### Scope of delivery

- Tension device, left
- Tension device, right

### Characteristics

- Chrome-plated

Art. no.	DN	d, $\varnothing$ [mm]	SU1 [pc.]	GBP/pc.
359.817.00.1	40	40	1	573.61
359.818.00.1	50	50	1	642.63
359.811.00.1	56	56	1	642.63
359.809.00.1	60	63	1	642.63
359.812.00.1	70	75	1	642.63
359.813.00.1	90	90	1	642.63
359.814.00.1	100	110	1	642.63
359.819.00.1	125	125	1	719.75
359.822.00.1	125	135	1	635.54
359.816.00.1	150	160	1	963.96



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Accessories for butt-welding tools

### Geberit set of tension devices d200



[click & scan](#)

#### Application purposes

- For Universal welding machines
- For tensioning pipes and fittings
- For use with KSS-200 welding plate, electric plane d40–200 and set of pipe supports d200

#### Scope of delivery

- Tension device, left
- Tension device, right

#### Characteristics

- Chrome-plated

Art. no.	DN	d, ø [mm]	SU1 [pc.]	GBP/pc.
359.884.00.1	200	200	1	1286.95

### Geberit set of tension devices



[click & scan](#)

#### Application purposes

- For tensioning pipes and fittings
- For Universal welding machines

#### Scope of delivery

- Tension device, left
- Tension device, right

#### Characteristics

- Chrome-plated

Art. no.	d, ø [mm]	SU1 [pc.]	GBP/pc.
359.835.00.1	250	1	1729.92
359.836.00.1	315	1	1913.26

### Geberit set of pipe supports d200, for welding machine Universal



[click & scan](#)

#### Application purposes

- For supporting pipes and fittings with dimensions of ø 200 mm
- For Universal welding machines
- For use with Geberit tension device set d200

#### Scope of delivery

- Set of 2 pieces

Art. no.	SU1 [pc.]	GBP/pc.
357.449.00.1	1	156.80

### Geberit set of pipe supports d50–160, for Media and Universal welding machines



[click & scan](#)

#### Application purposes

- For supporting pipes and fittings
- For Media and Universal welding machines

#### Scope of delivery

- Set of 2 pieces

#### Characteristics

- Adaptable to Geberit dimensions ø 50–160 mm

Art. no.	d, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
357.800.00.1	50-160	1	210.17

## Geberit set of support forks for Media and Universal welding machines



[click & scan](#)

### Application purposes

- For supporting pipes and fittings
- For Media and Universal welding machines

### Scope of delivery

- Set of 2 pieces

Art. no.	d, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
359.804.00.1	40-63	1	338.63
359.807.00.1	160	1	369.50

## Geberit pipe support prism d200-315, for welding machine Universal



[click & scan](#)

### Application purposes

- For Universal welding machines

Art. no.	d, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
359.691.00.1	200-315	1	366.10

## Geberit accessories set for butt welding tools d200-315, Universal



[click & scan](#)

### Application purposes

- For butt welding Geberit HDPE pipes and fittings  $\emptyset$  200-315 mm
- For Universal welding machines

### Scope of delivery

- Fastening for welding plate
- Electric plane,  $\emptyset$  200-315 mm, 230 V / 550 W
- Electronics connection box
- Hexagon key
- Pipe holder,  $\emptyset$  200-315 mm
- KSS-315 welding plate
- Tension device set,  $\emptyset$  250 / 315 mm
- Insert rings for  $\emptyset$  200 mm
- Transport case made of wood

### Technical data

Nominal voltage	230 V AC
Mains frequency	50-60 Hz

Art. no.	d, $\emptyset$ [mm]	Power consumption [W]	Plug type	SU1 [pc.]	GBP/pc.
359.009.P0.1	200-315	900	CEE 7/7	1	12081.31



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Accessories for butt-welding tools

### Geberit leather protection case



[click & scan](#)

#### Application purposes

- For KSS-160 and KSS-200 welding plates

Art. no.

SU1 GBP/pc.  
[pc.]

359.696.00.1

1 102.84

### Geberit Media transport case, empty



[click & scan](#)

#### Application purposes

- For Media welding machines

Art. no.

d, ø  
[mm]

SU4 SU1 GBP/pc.  
[pc.] [pc.]

359.663.00.1

40-160

2 1 976.78

### Geberit transport case for KSS-160, empty



[click & scan](#)

#### Application purposes

- For KSS-160 welding plate

Art. no.

SU1 GBP/pc.  
[pc.]

359.683.00.1

1 154.24

### Geberit jointing guide



[click & scan](#)

#### Application purposes

- For butt welding pipe ends up to ø 75 mm

Art. no.

d, ø  
[mm]

SU1 GBP/pc.  
[pc.]

359.903.00.1

32-75

1 96.12

### Geberit pipe support, swivelling, for Media and Universal welding machines



[click & scan](#)

Art. no.

d, ø  
[mm]

SU1 GBP/pc.  
[pc.]

242.462.00.1

135 / 160

1 64.26

358.729.00.1

75-125

1 64.26

## Geberit base for Media and Universal welding machines



[click & scan](#)

Art. no.	SU1	GBP/pc.
356.831.00.1	1	102.84

## Pipe processing tools

### Geberit pipe cutter for plastic pipes



[click & scan](#)

#### Application purposes

- For Geberit HDPE and Geberit Silent-db20 pipes and fittings
- For Geberit Silent-PP pipes and fittings
- For Geberit Silent-Pro pipes and fittings

#### Characteristics

- Cutting wheel for plastic

Art. no.	d, $\emptyset$ [mm]	SU1	GBP/pc. [pc.]
358.502.00.1	6–66	1	143.90
358.503.00.1	48–116	1	233.53
358.504.00.1	100–168	1	330.77

#### Accessories

- Geberit set of cutting wheels for pipe cutter for plastic pipes → p. 191

### Geberit set of cutting wheels for pipe cutter for plastic pipes



[click & scan](#)

#### Scope of delivery

- 2 cutting wheels
- Pin

Art. no.	d, $\emptyset$ [mm]	SU1	GBP/pc. [pc.]
242.827.00.1	6–66	1	49.24
242.828.00.1	48–168	1	78.93

### Geberit pipe cutter for plastic pipes



[click & scan](#)

#### Application purposes

- For Geberit HDPE pipes and fittings
- For cutting dimensions  $\emptyset$  200–315 mm to length

Art. no.	d, $\emptyset$ [mm]	SU1	GBP/pc. [pc.]
359.860.00.1	200–315	1	1400.19



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Pipe processing tools

### Geberit handheld pipe scraper



[click & scan](#)

#### Application purposes

- For preparing electro welding
- For removing the oxide layer on Geberit HDPE and Geberit Silent-db20 pipes and fittings

Art. no.

SU1 GBP/pc.  
[pc.]

356.118.00.1

1 53.99

### Geberit handheld pipe scraper, in case



[click & scan](#)

#### Application purposes

- For preparing electro welding
- For removing the oxide layer on Geberit HDPE and Geberit Silent-db20 pipes and fittings of dimensions  $\varnothing$  63–160 mm

#### Scope of delivery

- Spare blade
- Case

Art. no.

d,  $\varnothing$   
[mm]

SU1 GBP/pc.  
[pc.]

359.912.00.1

63–160

1 1161.27

### Geberit pipe scraper, in case



[click & scan](#)

#### Application purposes

- For removing the oxide layer on Geberit HDPE and Geberit Silent-db20 pipes and fittings of dimensions  $\varnothing$  110 mm
- For use with cordless screwdrivers

#### Scope of delivery

- Case
- Case insert
- Pipe scraper  $\varnothing$  110 mm

Art. no.

d,  $\varnothing$   
[mm]

SU1 GBP/pc.  
[pc.]

359.915.00.1

110

1 464.92

## Geberit pipe scraper set, in case



click & scan

### Application purposes

- For removing the oxide layer on Geberit PE and Geberit Silent-db20 pipes and fittings of dimensions  $\varnothing$  56–110 mm
- For use with cordless screwdrivers

### Scope of delivery

- Pipe scraper  $\varnothing$  56 mm
- Pipe scraper  $\varnothing$  63 mm
- Pipe scraper  $\varnothing$  75 mm
- Pipe scraper  $\varnothing$  90 mm
- Pipe scraper  $\varnothing$  110 mm
- Case
- Case insert
- Spare blade
- Button
- Drive shaft
- 5 sliding segments
- Grease pencil with retractable lead, yellow

Art. no.	d, $\varnothing$ [mm]	SU1	GBP/pc. [pc.]
359.916.00.1	56 / 63 / 75 / 90 / 110	1	2440.82

## Geberit pipe scraper set, in case



click & scan

### Application purposes

- For removing the oxide layer on Geberit PE and Geberit Silent-db20 pipes and fittings of dimensions  $\varnothing$  56 und 75–110 mm
- For use with cordless screwdrivers

### Scope of delivery

- Pipe scraper  $\varnothing$  56 mm
- Pipe scraper  $\varnothing$  75 mm
- Pipe scraper  $\varnothing$  90 mm
- Pipe scraper  $\varnothing$  110 mm
- Case
- Case insert
- Spare blade
- Button
- Drive shaft
- 5 sliding segments
- Grease pencil with retractable lead, yellow

Art. no.	d, $\varnothing$ [mm]	SU1	GBP/pc. [pc.]
359.917.00.1	56 / 75 / 90 / 110	1	2016.97



## Tools

Tools for Geberit Silent-db20 / Geberit HDPE  
Pipe processing tools

### Geberit pipe scraper



[click & scan](#)

#### Application purposes

- For removing the oxide layer on Geberit HDPE and Geberit Silent-db20 pipes and fittings
- For use with cordless screwdrivers

Art. no.	DN	d, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
359.922.00.1	56	56	1	441.55
359.923.00.1	60	63	1	441.55
359.924.00.1	70	75	1	441.55
359.925.00.1	90	90	1	441.55
359.926.00.1	100	110	1	441.55

#### Accessories

- Geberit case for pipe scraper set → p. 195

### Geberit chamfering tool



[click & scan](#)

#### Application purposes

- For chamfering plastic pipes with dimensions of  $\emptyset$  32–160 mm
- For chamfering Geberit Silent-PP pipes
- For chamfering Geberit Silent-Pro pipes

Art. no.	d, $\emptyset$ [mm]	SU1 [pc.]	GBP/pc.
358.501.00.1	32–160	1	193.12

### Geberit deburring knife



[click & scan](#)

#### Application purposes

- For deburring the inside and outside of Geberit HDPE and Geberit Silent-db20 pipes and fittings which have been cut to length

Art. no.	SU3 [pc.]	SU1 [pc.]	GBP/pc.
359.720.00.1	5	1	25.76

## Accessories for pipe processing tools

### Geberit case for pipe scraper set



[click & scan](#)

#### Scope of delivery

- Case insert
- Grease pencil with retractable lead, yellow
- Spare blade
- Button
- Drive shaft
- 5 sliding segments

Art. no.	SU1	GBP/pc.
359.930.00.1	1	306.46





---

# Appendix

<b>Sales and delivery conditions</b> .....	<b>198</b>
<b>Abbreviation</b> .....	<b>201</b>
<b>Index</b> .....	<b>202</b>



## Sales and delivery conditions

### GENERAL

1. In these Conditions of Sale "The Company" means Geberit Sales Ltd "the Customer" means the person, firm or company with whom The Company contracts. "The Contract" Any contract between The Company and the Customer for the sale and purchase of the Goods incorporating the Conditions (including any part or parts of them). "The Goods" Any Goods agreed in the Contract to be supplied to the Customer by The Company (including any part or parts of them).
2. These Conditions of Sale apply to and govern any contract between The Company and the Customer to the exclusion of any other conditions contained on, or in, any letter, order form, receipt of similar document emanating from the Customer. No variation of these Conditions of Sale shall be effective unless expressly agreed by The Company in writing.
3. (a) All quotations are for information only and are not to be considered as an offer by The Company. No Contract shall come into existence until an order by the Customer has been accepted by The Company.  
(b) Acceptance by The Company of any order shall be on the basis that Goods will be invoiced at the prices contained in The Company's price list current at the date of despatch unless otherwise agreed in writing by The Company.
4. (a) Except where otherwise stated in the contract or in The Company's current price list all prices include the cost of packaging and delivery (but not installation). The Company reserves the right to make additional charges if the Customer requires a method of packaging or delivery different from that normally employed by The Company.  
(b) The Customer shall, in addition to the net purchase price, pay to The Company the amount of any Value Added Tax or other sales tax at the rate in force at the time the Goods are invoiced.

### PAYMENT

5. (a) All Goods will be invoiced at the time of, or soon after, despatch. Payment for the Goods must be received by The Company not later than the last day of the month following the date of the invoice. In the event of late payment, The Company reserves the right to charge interest at a rate of 2% per month.  
(b) In the event of the Customer postponing delivery, or requesting that The Company suspend the manufacture of the Goods, or failing to give The Company sufficient information to enable it to process any order, the Customer shall pay any additional costs and expenses thereby incurred by The Company.  
(c) Unless otherwise agreed in writing by The Company the Customer shall not be entitled to set off against any moneys due to The Company under the Contract any sums claimed by or due to the Customer from The Company under the Contract or any other Contract between The Company and the Customer.

### ILLUSTRATION AND DIMENSIONS

6. (a) All information and illustrations contained in brochures, catalogues, price lists, trade literature and advertising material produced by The Company are approximate only, intended to indicate only the general character of the Goods, and do not form any part of any contract between The Company and the Customer.  
(b) The dimensions of the Goods are subject to manufacturing tolerances customary within the trade. Dimensions contained in quotations, acknowledgements of orders, or catalogues, price lists, advertising matter and other trade literature are therefore approximate only.

### SUBSTITUTED GOODS

7. The Company reserves the right to substitute Goods which are similar to the Goods ordered by the Customer provided that such substituted Goods are no less suitable for the purpose for which they are generally used than Goods ordered by the Customer.

### DELIVERY

8. The Company cannot offer a timed delivery service, although we will try to meet the customer needs wherever possible. Any deliveries required outside our delivery schedule will be at the customer's expense.
9. Delivery shall be made to the Customer's premises only.
10. The Customer shall be responsible for unloading the Goods at the point of delivery.
11. The Customer will confirm the goods are received at the time of delivery by signing the Proof Of Delivery document (POD) providing a signature, date and printed name.
12. Immediately on collection or delivery, whichever is appropriate, the Customer shall examine the goods. Any shortages, damages or other delivery discrepancies must be notified directly to the Customer Support team in writing within three working days of delivery or collection. Credits will not be given if a POD has been signed and there have been no reported anomalies within 3 working days of the delivery date.
13. The Company will use its best endeavours to comply with any delivery date, however, collection or delivery dates and times indicated by the Company shall be regarded as best estimates only. The Company cannot be responsible for any loss or damage whatsoever caused by late delivery where circumstance beyond The Company's control have caused such delay.
14. The Company operates a minimum delivery value requirement for deliveries to the Customer's premises. This currently stands at £300.
15. Orders placed below the minimum order value will be subject to a £10 minimum order value charge.
16. Express orders should be placed before our cut offs for delivery the next day. These orders are subject to a carriage charge to the customer and will be priced based on weight.

### RETURNS

17. The Company does not operate a returns policy for saleable stock or for stock that is defective or damaged upon receipt. Any agreed stock return is at the discretion of The Company and only with prior written consent. Where such consent is given, a handling charge of a minimum of 30% of invoiced value will be made.

## **RISK AND RETENTION OF OWNERSHIP**

18. The risk in the Goods contracted to be sold by The Company shall pass to the Customer when the Goods are delivered to or collected by the Customer.
19. (a) Notwithstanding any passing of risk to the Customer, The Company retains ownership of the Goods the subject matter of this Contract the property in which shall not pass to the Customer and the Customer shall keep any Goods delivered to it as bailee for and on behalf of The Company until The Company has received full payment of the price of all Goods (whether or not the Goods are delivered in instalments and some have been paid for by the Customer).
- (b) Until ownership of the Goods has passed to the Customer the Customer;
- (i) shall insure the Goods against any loss or damage with an insurance office of repute.
- (ii) shall store the Goods separately or in some other way ensure that they are readily identifiable as the property of The Company.
- (iii) irrevocably authorise the representative of The Company at any time and from time to time (whether or not payment is due) to repossess the Goods and for such purpose to enter any premises occupied by the Customer or where the Goods are or are thought to be and to sever the Goods from anything to which they are attached without being responsible for any damage caused.
- (iv) shall keep the Goods free from any charge, lien or other encumbrance.
- (c) If, while under The Company's ownership, the Goods or any of them are processed or incorporated into other Goods ("the New Goods") then, provided the Goods remain a readily identifiable and removable part of the New Goods, the provisions of conditions (a) and (b) shall apply.
- (d) The Company (acting on its own account, not as agent for the Customer) may sell or agree to sell any of the Goods or the New Goods in The Company's possession on such terms as it may in its sole discretion consider appropriate.
- (e) The Company shall be entitled to a general lien over all Goods and materials of the Customer which is in The Company's possession or control from time to time for any sums due at any time whatsoever to The Company.
- (f) Nothing in this condition shall confer any right upon the Customer to refuse or delay payment therefore.

## **LIMITATION OF LIABILITIES**

20. (a) Goods may be delivered in cartons, bundles, returnable containers, loose or in other packaging. In any case where it is established to the satisfaction of The Company that the Goods have been damaged or lost (whether wholly or in part) in transit The Company will, at its own cost, repair or replace same provided that
- (i) in the case of partial loss or damage, the Customer has returned to The Company's representative (or where the Goods have been delivered by a Carrier his representative) The Company' receipt note duly signed by the Customer's representative and indicating thereon as shortage of or damage to cartons, bundles, returnable containers, loose Goods or other such packages as shall make up the delivery and full particulars are notified directly to The Company in writing within three working days of delivery:
- (ii) in the case of damage, the Goods and their packaging are retained by the Customer for inspection by The Company's representative. The Company will not be liable for any loss or damage in transit, except as above.

- (b) Where it is established to the satisfaction of The Company that Goods delivered by them or collected by the Customer, contain at the time of receipt by the Customer some defect in quality (not being a defect caused by some act or neglect of the Customer or a third party) and the Goods are returned to The Company at the Customer's expense within three months of despatch to the Customer, The Company will at its own cost repair or replace them (the choice being at The Company's option).

((c) Save as aforesaid and to the extent permitted by law The Company will not be liable to the Customer for any loss or damage whatsoever suffered as a result of a defect in quality or defective installation or the fact that the Goods are not fit for a particular purpose save for the conditions implied by section 12 of the Sale of Goods Act 1979 and without prejudice to the generality of the foregoing any implied term, condition or warranty statutory or otherwise as to the quality of the Goods sold or their fitness for any particular purpose or as to their correspondence with any description or sample is hereby excluded.

21. No warranty or representation given by or on behalf of The Company including without prejudice to the generality of the foregoing any advice as to the installation quantities use or performance of Goods supplied by The Company shall be binding upon The Company unless specifically stated in writing by The Company to be incorporated in the contract. Nothing in these Conditions excludes or limits the liability of The Company for death or personal injury caused by The Company's negligence or fraudulent misrepresentation.

## **CONSEQUENTIAL LOSS**

22. Without prejudice to the generality of the foregoing provisions The Company shall not in any event be liable to the Customer for any indirect or consequential loss of or damage (whether for loss of profit, loss of business, depletion of goodwill or otherwise) costs, expenses or other claims for consequential compensation whatsoever (howsoever caused) which arise out of or in connection with the Contract.

## **INSOLVENCY AND BREACH OF CONTRACT**

23. The Company shall have the option (without prejudice to any of its other rights against the Customer) by notice in writing to the Customer to rescind the contract or to suspend delivery in the following events:
- (i) should any sum owing by the Customer to The Company be overdue.
- (ii) should the Customer be in breach of any term of the contract with The Company.
- (iii) should the Customer enter into any composition or arrangement with, or for the benefit of its creditors or have a receiving order in bankruptcy made against him or (if a body corporate) should it go into liquidation either voluntary or compulsory or under supervision or have a receiver and/or manager administrative receiver or administrator appointed over all or any part of its assets, or in Scotland should the Customer become notour bankrupt, or sequestrated, or a receiver, or judicial factor, or trustee is appointed, for any portion of the Customer's estate or effects or suffer any arrestment charge pending or other diligence to be issued or levied upon the Customer his estate or effects.



**HEALTH AND SAFETY**

24. As The Company is under a duty pursuant to S 6 of the Health and Safety at Work Act 1974 in respect of the design, manufacture and supply of any article for use at work, the Customer shall be deemed to have been afforded by The Company reasonable opportunity for the testing and examination of Goods or materials in respect of their safety and risk to health prior to delivery to the Customer, and he shall be deemed to have been afforded by The Company adequate information about the Goods and materials in respect of the use for which they are designed, and have been tested, and of any conditions necessary to ensure that when put to that use they will be safe and without risk to health, whether or not the said information has been requested by the Customer.

**INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS**

25. The Company is the proprietor or beneficial owners of patents, registered designs, trademarks and tradenames, copyright or other industrial or intellectual property rights relating to the Goods and The Company reserves all such rights to itself and no authorisation of licence is granted to the Customer to use the Goods or any drawing or specifications relating to the same provided to the Customer by The Company otherwise than for the purpose provided.

**FORCE MAJEURE**

26. The Company reserves the right to defer the date of delivery or to cancel the Contract or reduce the volume of the Goods ordered by the Customer (without liability to the Customer) if it is prevented from or delayed in the carrying on of its business due to circumstances beyond the reasonable control of the Company including without limitation, acts of God, Governmental actions, war or national emergency, riot, civil commotion, fire, explosion, flood, epidemic, lock out, strikes or other labour disputes (whether or not relating to either party's workforce) or restraints or delays affecting carriers or inability or delay in obtaining supplies of adequate suitable materials.

**WAIVER**

27. Forbearance or indulgence by The Company shown or granted to the Customer whether in respect of these Conditions of Sale or otherwise, shall not affect or prejudice the rights of The Company against the Customer or be taken as a waiver of any of these Conditions of Sale.

**GOVERNING LAW**

28. Any contract incorporating these Conditions of Sale shall be governed by and construed in accordance with the laws of England and The Company and the Customer hereby agree to submit to the jurisdiction of the English Courts.

**HEADNOTES**

29. The head notes to these Conditions have been inserted for convenience and shall not affect their construction.

**Geberit Sales Ltd**

Geberit House, Edgehill Drive

Warwick, Warwickshire

CV34 6NH

Effective July 2018

## Abbreviation

Abbreviation	Designation
I1	length, partial dimension (cm)
L2	length (cm)
I2	length, partial dimension (cm)
L3	length (cm)
I3	length, partial dimension (cm)
La	linear expansion (cm)
IK	grip length, screw (cm)
M	metric thread (mm)
m	bolt hole diameter (cm)
n	number of bolts, flange connection (PC)
PN	nominal pressure (bar)
R	taper external thread (")
r	radius (cm)
DN	nominal width
R1	taper external thread (")
Rg	round thread (")
Rp	taper internal pipe thread (")
Rp1	taper internal pipe thread (")
Rp2	taper internal pipe thread (")
S	pipe series
s	wall thickness (mm)
s1	wall thickness (mm)
SW	spanner width (mm)
A	projection (cm)
s ISO	wall thickness (for labels) (mm)
a	partial dimension (cm)
A1	projection (cm)
V	measuring range, volumetric flow rate (l/min)
a1	partial dimension (cm)
AB	connection area (mm)
AB1	connection area (mm)
AB2	connection area (mm)
Acm <sup>2</sup>	clear cross-sectional area (cm <sup>2</sup> )
AD	connecting distance (cm)
arc	angle (°)
AD1	connecting distance (cm)
B	width (cm)
b	partial dimension (cm)
B1	width (cm)
c	flange hole diameter (mm)
d, ø	outer diameter (mm)
UNC	inch thread
D	outer diameter (cm)
d1, ø	outer diameter (mm)
D1	outer diameter (cm)
d2, ø	outer diameter (mm)
d3, ø	outer diameter (mm)
da	outer pipe diameter (mm)

Abbreviation	Designation
di, ø	inner diameter (mm)
DN/OD	nominal width
DN	nominal width
E	insertion depth (cm)
E1	insertion depth (cm)
G	pipe thread (")
G1	pipe thread (")
X	leg length / L-dimension (cm)
X1	leg length / L-dimension (cm)
G2	pipe thread (")
X2	leg length / L-dimension (cm)
H	height (cm)
X3	leg length / L-dimension (cm)
h	height, partial dimension (cm)
H1	height (cm)
X4	leg length / L-dimension (cm)
h1	height, partial dimension (cm)
X5	leg length / L-dimension (cm)
h2	height, partial dimension (cm)
h3	height, partial dimension (cm)
k	flange, diameter of bolt circle (cm)
X6	leg length / L-dimension (cm)
Z	Z-dimension (cm)
Z1	Z-dimension (cm)
Z2	Z-dimension (cm)
Z3	Z-dimension (cm)
Z4	Z-dimension (cm)
K	maximum cutting (cm)
Z5	Z-dimension (cm)
K1	maximum cutting (cm)
Z6	Z-dimension (cm)
K2	maximum cutting (cm)
K3	maximum cutting (cm)
KL	cable length (cm)
L	length (cm)
l	length, partial dimension (cm)
L	L / length (m)
L1	length (cm)



# Index

Art. no.	Page						
152.149.16.1	33	242.922.00.1	60	307.012.14.1	87	308.883.14.1	89
152.150.16.1	33	242.923.00.1	60	307.050.14.1	83	308.885.14.1	73
152.151.16.1	33	242.924.00.1	60	307.054.14.1	76	310.000.14.1	72
152.152.16.1	33	242.925.00.1	60	307.058.14.1	77	310.002.14.1	87
152.153.16.1	33	242.926.00.1	60	307.060.14.1	83	310.003.14.3	88
152.154.16.1	33	242.927.00.1	60	307.064.14.1	76	310.005.14.1	94
152.155.16.1	33	242.928.00.1	60	307.068.14.1	77	310.006.00.1	132
152.197.16.1	33	242.929.00.1	60	307.074.14.1	76	310.007.00.1	133
152.198.16.1	33	242.930.00.1	60	307.078.14.1	77	310.008.14.1	75
152.495.00.1	61	242.931.00.1	60	307.150.14.1	72	310.012.14.1	87
152.496.00.1	61	244.126.00.1	64	307.300.14.1	72	310.014.14.1	74
152.651.16.1	33	244.127.00.1	64	307.333.14.1	84	310.048.14.1	75
152.652.16.1	33	300.007.00.2	127	307.345.14.1	84	310.049.14.1	86
152.654.16.1	33	305.000.14.1	72	307.450.14.1	72	310.050.14.1	83
152.657.16.1	33	305.002.14.1	87	307.600.14.1	73	310.051.14.1	85
152.658.16.1	33	305.003.14.3	88	307.670.14.1	72	310.052.14.1	83
152.661.16.1	33	305.005.14.1	94	307.812.26.1	93	310.053.14.1	85
152.682.00.1	61	305.040.14.3	92	307.880.14.1	74	310.054.14.1	76
152.689.00.1	61	305.054.14.1	76	307.885.14.1	73	310.058.14.1	77
152.690.00.1	61	305.058.14.1	77	308.000.14.1	72	310.060.14.1	83
152.691.00.1	61	305.150.14.1	72	308.002.14.1	87	310.062.14.1	83
152.692.00.1	61	305.300.14.1	72	308.003.14.3	88	310.064.14.1	76
152.693.00.1	61	305.450.14.1	72	308.005.14.1	94	310.068.14.1	77
152.694.00.1	61	305.600.14.1	73	308.012.14.1	87	310.070.14.1	83
152.796.00.1	61	305.670.14.1	72	308.014.14.1	74	310.072.14.1	83
153.566.16.1	61	305.812.26.1	93	308.050.14.1	83	310.074.14.1	76
240.331.00.1	58	305.880.14.1	74	308.054.14.1	76	310.078.14.1	77
240.332.00.1	58	305.885.14.1	73	308.058.14.1	77	310.080.14.1	83
240.474.00.1	186	305.904.14.1	91	308.060.14.1	83	310.081.14.1	82
240.813.00.1	61	305.905.14.1	90	308.064.14.1	76	310.082.14.1	83
241.785.00.1	64	305.906.14.1	90	308.068.14.1	77	310.083.14.1	79
241.786.00.1	64	305.907.14.1	92	308.070.14.1	83	310.084.14.1	76
241.787.00.1	64	305.921.00.1	126	308.074.14.1	76	310.088.14.1	77
241.790.00.1	64	306.000.14.1	72	308.078.14.1	77	310.101.14.1	82
241.791.00.1	64	306.002.14.1	87	308.081.14.1	82	310.102.14.1	78
241.792.00.1	120	306.008.14.1	75	308.082.14.1	78	310.104.14.1	76
241.793.00.1	120	306.050.14.1	83	308.083.14.1	79	310.105.14.1	79
241.794.00.1	120	306.054.14.1	76	308.084.14.1	76	310.108.14.1	77
241.795.00.1	120	306.058.14.1	77	308.088.14.1	77	310.115.14.1	81
241.796.00.1	120	306.064.14.1	76	308.089.14.1	77	310.117.14.1	80
241.797.00.1	121	306.068.14.1	77	308.150.14.1	72	310.150.14.1	72
241.798.00.1	122	306.150.14.1	72	308.300.14.1	72	310.171.14.1	82
241.799.00.1	122	306.300.14.1	72	308.333.14.1	84	310.172.14.1	81
241.885.00.1	122	306.450.14.1	72	308.450.14.1	72	310.300.14.1	72
241.899.00.1	43	306.600.14.1	73	308.600.14.1	73	310.334.14.1	84
242.278.00.1	64	306.812.26.1	93	308.670.14.1	72	310.345.14.1	84
242.279.00.1	64	306.880.14.1	74	308.811.14.1	80	310.445.14.1	79
242.280.00.1	64	306.885.14.1	73	308.812.26.1	93	310.450.14.1	72
242.281.00.1	120	306.906.14.1	91	308.815.14.1	81	310.600.14.1	73
242.282.00.1	120	307.000.14.1	72	308.817.14.1	80	310.670.14.1	72
242.283.00.1	120	307.002.14.1	87	308.871.14.1	82	310.811.14.1	80
242.462.00.1	190	307.003.14.3	88	308.872.14.1	81	310.812.26.1	93
242.827.00.1	191	307.005.14.1	94	308.880.14.1	74	310.813.14.1	80
242.828.00.1	191	307.006.00.1	133	308.881.14.1	90	310.815.14.1	81

Art. no.	Page						
310.817.14.1	80	358.026.00.1	161	359.126.00.1	153	359.696.00.1	190
310.871.14.1	82	358.060.00.1	154	359.133.00.1	163	359.720.00.1	194
310.872.14.1	81	358.061.00.1	156	359.147.00.1	162	359.778.00.1	182
310.880.14.1	74	358.062.00.1	156	359.268.16.1	31	359.797.00.1	185
310.881.14.1	90	358.501.00.1	194	359.309.00.1	37	359.799.00.1	185
310.883.14.1	89	358.502.00.1	191	359.311.00.1	37	359.804.00.1	189
310.885.14.1	73	358.503.00.1	191	359.313.00.1	37	359.807.00.1	189
310.921.00.1	126	358.504.00.1	191	359.330.00.1	31	359.809.00.1	187
312.812.26.1	93	358.729.00.1	190	359.421.00.1	38	359.811.00.1	187
315.001.14.1	72	358.759.00.1	185	359.423.00.1	38	359.812.00.1	187
315.002.14.1	87	358.760.00.1	185	359.424.00.2	30	359.813.00.1	187
315.003.14.3	88	358.829.00.1	153	359.426.00.2	30	359.814.00.1	187
315.005.14.1	95	359.007.00.1	144	359.427.00.2	30	359.816.00.1	187
315.012.14.1	87	359.009.P0.1	189	359.428.00.2	30	359.817.00.1	187
315.100.14.1	83	359.013.00.1	161	359.429.00.2	30	359.818.00.1	187
315.104.14.1	76	359.037.00.1	161	359.430.00.2	30	359.819.00.1	187
315.108.14.1	78	359.038.00.1	160	359.432.00.2	30	359.822.00.1	187
315.144.14.1	76	359.046.1P.1	183	359.433.00.2	30	359.835.00.1	188
315.148.14.1	77	359.046.P2.1	182	359.434.00.2	30	359.836.00.1	188
315.150.14.1	72	359.046.P2.2	182	359.435.00.2	30	359.860.00.1	191
315.300.14.1	72	359.046.P5.2	182	359.436.00.2	30	359.884.00.1	188
315.333.14.1	84	359.047.P2.1	183	359.437.00.2	30	359.886.00.2	181
315.450.14.1	72	359.047.P2.2	183	359.438.00.2	30	359.900.00.1	132
315.812.26.1	93	359.052.00.1	187	359.439.00.2	30	359.903.00.1	190
315.813.26.1	93	359.053.00.1	187	359.440.00.2	30	359.912.00.1	192
315.885.14.1	73	359.054.00.1	187	359.441.00.2	30	359.915.00.1	192
348.300.00.1	126	359.056.00.1	187	359.442.00.2	30	359.916.00.1	193
348.301.00.1	126	359.057.00.1	187	359.443.00.2	30	359.917.00.1	193
348.302.00.1	126	359.059.00.1	186	359.444.00.2	30	359.922.00.1	194
348.303.00.1	126	359.060.P2.1	184	359.445.00.2	30	359.923.00.1	194
348.304.00.1	126	359.060.P2.2	184	359.448.00.2	30	359.924.00.1	194
348.305.00.1	126	359.060.P5.2	184	359.449.00.2	30	359.925.00.1	194
348.306.00.1	126	359.082.P2.1	183	359.450.00.2	30	359.926.00.1	194
356.010.00.1	127	359.082.P2.2	183	359.454.00.1	30	359.930.00.1	195
356.011.00.1	127	359.082.P5.2	183	359.455.00.1	30	359.969.00.1	133
356.012.00.1	127	359.084.P2.1	184	359.456.00.1	30	360.000.16.0	10
356.013.00.1	127	359.084.P2.2	184	359.457.00.1	30	360.045.16.1	11
356.014.00.1	127	359.098.00.1	142	359.458.00.1	30	360.055.16.1	12
356.015.00.1	128	359.099.00.1	142	359.459.00.1	30	360.061.16.1	42
356.016.00.1	128	359.100.00.1	144	359.461.16.1	32	360.108.16.1	14
356.100.00.1	174	359.101.00.1	146	359.462.00.1	30	360.109.16.1	14
356.102.00.1	174	359.102.00.1	145	359.464.00.1	30	360.158.16.1	16
356.103.00.1	174	359.105.00.1	139	359.504.00.1	154	360.159.16.1	16
356.116.00.1	174	359.107.00.1	139	359.575.00.1	151	360.557.16.1	23
356.118.00.1	192	359.108.00.1	141	359.579.00.1	151	360.700.16.1	28
356.201.00.1	178	359.109.00.1	141	359.635.00.1	154	360.719.16.1	37
356.203.00.1	178	359.111.00.1	143	359.641.1P.2	180	360.720.16.1	37
356.831.00.1	191	359.112.00.1	143	359.641.P5.2	179	360.721.16.1	37
357.449.00.1	188	359.113.00.1	145	359.662.00.1	177	360.722.16.1	32
357.599.00.1	185	359.114.00.1	146	359.663.00.1	190	360.723.16.1	32
357.600.00.1	185	359.117.00.1	140	359.665.1P.2	180	360.740.16.1	34
357.751.00.1	186	359.118.00.1	140	359.665.P5.2	180	360.750.16.1	35
357.800.00.1	189	359.119.00.1	153	359.673.00.1	181	360.771.16.1	27
358.004.00.1	152	359.122.00.1	152	359.675.P5.2	181	360.772.16.1	40
358.012.00.1	155	359.123.00.1	155	359.683.00.1	190	360.779.16.3	29
358.024.00.1	160	359.124.00.1	155	359.691.00.1	189	360.780.16.1	36



Art. no.	Page						
360.781.16.1	58	361.784.16.1	33	363.000.16.0	10	364.045.16.1	11
360.782.16.1	63	361.789.00.1	59	363.045.16.1	11	364.055.16.1	12
360.783.00.1	62	361.802.92.1	58	363.055.16.1	12	364.084.16.1	41
360.784.16.1	33	361.812.16.1	57	363.061.16.1	42	364.088.16.1	11
360.789.00.1	59	361.822.00.1	152	363.083.16.1	41	364.109.16.1	14
360.802.92.1	58	361.841.00.2	47	363.088.16.1	11	364.112.16.1	14
360.812.16.1	57	361.842.00.1	48	363.112.16.1	14	364.115.16.1	14
360.822.00.1	152	361.843.00.2	48	363.115.16.1	14	364.120.16.1	14
360.841.00.2	47	361.850.00.1	56	363.162.16.1	16	364.159.16.1	16
360.842.00.1	48	361.856.00.1	50	363.165.16.1	16	364.162.16.1	16
360.843.00.2	48	361.861.00.1	148	363.457.16.1	21	364.165.16.1	16
360.850.00.1	56	361.872.16.1	13	363.462.16.1	20	364.170.16.1	16
360.861.00.1	148	361.929.16.1	57	363.465.16.1	20	364.270.16.1	18
361.000.16.0	10	362.708.00.1	59	363.558.16.1	22	364.320.16.1	17
361.045.16.1	11	362.769.00.1	59	363.559.16.1	23	364.370.16.1	18
361.055.16.1	12	362.771.00.1	60	363.560.16.1	23	364.451.16.1	24
361.065.16.1	42	362.781.16.1	58	363.561.16.1	22	364.462.16.1	20
361.080.16.1	41	362.782.16.1	63	363.673.00.1	129	364.465.16.1	20
361.088.16.1	11	362.783.00.1	62	363.674.00.1	129	364.558.16.1	22
361.109.16.1	14	362.790.00.1	59	363.700.16.1	28	364.559.16.1	23
361.112.16.1	14	362.826.26.1	52	363.724.16.1	37	364.560.16.1	23
361.159.16.1	16	362.828.26.1	52	363.728.16.1	36	364.561.16.1	22
361.162.16.1	16	362.833.00.1	56	363.740.16.1	34	364.565.16.1	23
361.459.16.1	20	362.834.26.1	54	363.742.00.1	62	364.566.16.1	22
361.462.16.1	20	362.835.00.1	55	363.744.16.1	39	364.600.16.1	19
361.498.16.1	21	362.836.00.1	54	363.745.00.1	39	364.605.16.1	19
361.557.16.1	23	362.837.00.1	52	363.748.00.1	38	364.610.16.1	19
361.558.16.1	22	362.837.26.1	53	363.749.16.1	35	364.700.16.1	28
361.559.16.1	23	362.839.26.1	53	363.750.16.1	35	364.724.16.1	37
361.666.16.1	170	362.842.26.1	56	363.771.16.1	27	364.728.16.1	36
361.673.00.1	129	362.843.26.1	55	363.772.16.1	40	364.730.16.1	46
361.700.16.1	28	362.844.26.1	55	363.774.16.1	44	364.740.16.1	34
361.719.16.1	37	362.846.00.1	50	363.776.16.1	51	364.744.16.1	39
361.720.16.1	37	362.848.26.1	52	363.779.16.3	29	364.749.16.1	35
361.721.16.1	37	362.851.26.1	51	363.780.16.1	36	364.750.16.1	35
361.722.16.1	37	362.852.26.1	54	363.781.16.1	58	364.752.16.3	29
361.723.16.1	37	362.853.26.1	54	363.782.16.1	63	364.753.16.1	34
361.726.16.1	36	362.854.26.1	54	363.783.00.1	62	364.771.16.1	27
361.727.16.1	36	362.855.26.1	54	363.789.00.1	59	364.772.16.1	40
361.728.16.1	32	362.856.26.1	56	363.802.92.1	58	364.776.16.1	51
361.740.16.1	34	362.857.26.1	54	363.812.16.1	57	364.779.16.3	29
361.742.00.1	62	362.858.26.1	54	363.822.00.1	152	364.780.16.1	36
361.743.26.1	39	362.859.26.1	54	363.841.00.2	47	364.781.16.1	58
361.744.16.1	39	362.862.26.1	147	363.842.00.1	48	364.782.16.1	63
361.745.00.1	39	362.863.26.1	147	363.843.00.2	48	364.783.00.1	62
361.748.00.1	38	362.864.26.1	147	363.850.00.1	56	364.789.00.1	59
361.750.16.1	35	362.865.26.1	147	363.856.00.1	50	364.802.92.1	58
361.752.16.3	29	362.868.26.1	52	363.861.00.1	148	364.812.16.1	57
361.771.16.1	27	362.869.26.1	52	363.862.00.1	150	364.822.00.1	152
361.772.16.1	40	362.874.26.1	53	363.863.00.1	149	364.841.00.2	47
361.776.16.1	51	362.875.26.1	55	363.864.00.1	149	364.842.00.1	48
361.779.16.3	29	362.876.26.1	55	363.873.16.1	13	364.843.00.2	48
361.780.16.1	36	362.877.26.1	55	363.929.16.1	57	364.850.00.1	56
361.781.16.1	58	362.878.26.1	55	363.931.16.1	34	364.861.00.1	148
361.782.16.1	63	362.879.26.1	55	363.932.16.1	35	364.873.16.1	13
361.783.00.1	62	362.880.26.1	55	364.000.16.0	10	364.874.16.1	13

Art. no.	Page						
364.989.16.2	26	365.813.16.1	47	366.744.16.1	39	367.262.16.1	18
365.000.16.0	10	365.822.00.1	152	366.745.00.1	39	367.265.16.1	18
365.045.16.1	11	365.841.00.2	47	366.748.00.1	38	367.270.16.1	18
365.046.16.1	12	365.842.00.1	48	366.750.16.1	35	367.275.16.1	18
365.055.16.1	12	365.843.00.2	48	366.771.16.1	27	367.280.16.1	18
365.088.16.1	11	365.850.00.1	56	366.772.16.1	40	367.285.16.1	18
365.109.16.1	14	365.856.00.1	50	366.776.16.1	51	367.315.16.1	17
365.112.16.1	14	365.861.00.1	148	366.779.16.3	29	367.320.16.1	17
365.115.16.1	14	365.929.16.1	57	366.780.16.1	36	367.325.16.1	17
365.120.16.1	14	365.931.16.1	34	366.781.16.1	58	367.330.16.1	17
365.125.16.1	14	365.932.16.1	35	366.782.16.1	63	367.335.16.1	17
365.159.16.1	16	365.989.16.2	26	366.783.00.1	62	367.362.16.1	18
365.162.16.1	16	366.000.16.0	10	366.784.16.1	33	367.365.16.1	18
365.165.16.1	16	366.041.16.1	44	366.789.00.1	59	367.370.16.1	18
365.170.16.1	16	366.042.16.1	44	366.802.92.1	58	367.375.16.1	18
365.175.16.1	16	366.043.16.1	44	366.812.16.1	57	367.380.16.1	18
365.275.16.1	18	366.044.16.1	44	366.820.92.1	64	367.385.16.1	18
365.325.16.1	17	366.045.16.1	11	366.841.00.2	47	367.445.16.1	20
365.375.16.1	18	366.046.16.1	44	366.842.00.1	48	367.451.16.1	24
365.451.16.1	24	366.047.16.1	44	366.843.00.2	48	367.453.16.1	24
365.465.16.1	20	366.048.16.1	44	366.850.00.1	56	367.454.16.1	24
365.470.16.1	20	366.055.16.1	12	366.861.00.1	148	367.458.16.1	21
365.558.16.1	22	366.061.16.1	42	366.887.16.1	46	367.471.16.1	36
365.559.16.1	23	366.088.16.1	11	366.888.16.1	41	367.480.16.1	20
365.560.16.1	23	366.109.16.1	14	366.898.16.1	45	367.481.16.1	20
365.561.16.1	22	366.112.16.1	14	366.929.16.1	57	367.485.16.1	44
365.565.16.1	23	366.115.16.1	14	366.932.16.1	35	367.550.16.1	33
365.566.16.1	22	366.120.16.1	14	366.989.16.2	26	367.551.16.1	33
365.570.16.1	23	366.125.16.1	14	367.000.16.0	10	367.558.16.1	22
365.571.16.1	22	366.130.16.1	14	367.003.16.1	21	367.559.16.1	23
365.600.16.1	19	366.159.16.1	16	367.009.16.1	115	367.560.16.1	23
365.605.16.1	19	366.162.16.1	16	367.015.16.1	12	367.561.16.1	22
365.610.16.1	19	366.165.16.1	16	367.030.16.1	12	367.565.16.1	23
365.673.00.1	129	366.170.16.1	16	367.045.16.1	11	367.566.16.1	22
365.700.16.1	28	366.175.16.1	16	367.046.16.1	12	367.570.16.1	23
365.725.16.1	37	366.180.16.1	16	367.055.16.1	12	367.571.16.1	22
365.729.16.1	36	366.280.16.1	18	367.070.16.1	42	367.575.16.1	23
365.730.16.1	46	366.330.16.1	17	367.088.16.1	11	367.576.16.1	22
365.740.16.1	34	366.380.16.1	18	367.109.16.1	14	367.580.16.1	23
365.742.00.1	62	366.451.16.1	24	367.112.16.1	14	367.581.16.1	22
365.744.16.1	39	366.550.16.1	33	367.115.16.1	14	367.600.16.1	19
365.745.00.1	39	366.559.16.1	23	367.120.16.1	14	367.605.16.1	19
365.748.00.1	38	366.560.16.1	23	367.125.16.1	14	367.610.16.1	19
365.750.16.1	35	366.561.16.1	22	367.130.16.1	14	367.612.16.1	26
365.771.16.1	27	366.565.16.1	23	367.135.16.1	14	367.614.16.1	25
365.772.16.1	40	366.566.16.1	22	367.159.16.1	16	367.615.16.1	13
365.776.16.1	51	366.570.16.1	23	367.162.16.1	16	367.616.16.1	14
365.779.16.3	29	366.571.16.1	22	367.163.16.1	15	367.673.00.1	129
365.780.16.1	36	366.575.16.1	23	367.165.16.1	16	367.674.00.1	129
365.781.16.1	58	366.576.16.1	22	367.170.16.1	16	367.700.16.1	28
365.782.16.1	63	366.605.16.1	19	367.175.16.1	16	367.708.00.1	59
365.783.00.1	62	366.700.16.1	28	367.180.16.1	16	367.730.16.1	46
365.784.16.1	33	366.730.16.1	46	367.185.16.1	16	367.739.16.1	32
365.789.00.1	59	366.740.16.1	34	367.209.16.1	17	367.740.16.1	34
365.802.92.1	58	366.742.00.1	62	367.212.16.1	17	367.742.00.1	62
365.812.16.1	57	366.743.26.1	39	367.235.16.1	17	367.744.16.1	39



Art. no.	Page						
367.745.00.1	39	368.185.16.1	16	369.189.16.1	16	370.594.16.5	22
367.748.00.1	38	368.189.16.1	16	369.195.16.1	16	370.700.16.1	28
367.750.16.1	35	368.285.16.1	18	369.285.16.1	18	370.738.16.1	31
367.771.16.1	27	368.335.16.1	17	369.335.16.1	17	370.739.16.1	32
367.772.16.1	40	368.385.16.1	18	369.385.16.1	18	370.742.00.1	62
367.776.16.1	51	368.451.16.1	24	369.451.16.1	24	370.744.16.1	39
367.779.16.3	29	368.453.16.1	24	369.453.16.1	24	370.745.00.1	39
367.780.16.1	36	368.454.16.1	24	369.454.16.1	24	370.748.00.1	38
367.781.16.1	58	368.550.16.1	33	369.535.16.1	23	370.751.16.1	50
367.782.16.1	63	368.561.16.1	22	369.550.16.1	33	370.775.16.1	27
367.783.00.1	62	368.566.16.1	22	369.551.16.1	33	370.776.16.1	51
367.784.16.1	33	368.570.16.1	23	369.584.16.1	22	370.812.16.1	57
367.789.00.1	59	368.571.16.1	22	369.586.16.1	22	370.840.00.1	49
367.792.16.1	42	368.575.16.1	23	369.587.16.1	22	370.841.00.1	49
367.794.16.1	45	368.576.16.1	22	369.588.16.1	22	370.846.00.1	50
367.802.92.1	58	368.580.16.1	23	369.591.16.1	22	370.861.26.1	148
367.809.16.1	59	368.581.16.1	22	369.605.16.1	19	371.000.16.0	10
367.810.16.1	59	368.584.16.1	22	369.610.16.1	19	371.015.16.1	12
367.812.16.1	57	368.585.16.1	23	369.700.16.1	28	371.030.16.1	12
367.813.16.1	47	368.586.16.1	22	369.739.16.1	32	371.045.16.1	12
367.819.92.1	64	368.600.16.1	19	369.742.00.1	62	371.050.16.0	10
367.841.00.2	47	368.605.16.1	19	369.743.26.1	39	371.055.16.1	12
367.842.00.1	48	368.610.16.1	19	369.744.16.1	39	371.135.16.1	14
367.843.00.2	48	368.673.00.1	129	369.745.00.1	39	371.139.16.1	14
367.850.00.1	56	368.700.16.1	28	369.748.00.1	38	371.145.16.1	14
367.856.00.1	50	368.739.16.1	32	369.771.16.1	27	371.146.16.1	14
367.861.00.1	148	368.742.00.1	62	369.776.16.1	51	371.147.16.1	14
367.880.16.1	41	368.744.16.1	39	369.779.16.3	29	371.185.16.1	16
367.887.16.1	46	368.745.00.1	39	369.789.00.1	59	371.189.16.1	16
367.888.16.1	41	368.748.00.1	38	369.802.92.1	58	371.195.16.1	16
367.898.16.1	45	368.771.16.1	27	369.812.16.1	57	371.196.16.1	16
367.903.16.1	43	368.776.16.1	51	369.841.00.2	47	371.197.16.1	16
367.904.16.1	44	368.779.16.3	29	369.842.00.1	48	371.454.16.1	24
367.923.16.1	43	368.789.00.1	59	369.843.00.2	48	371.596.16.1	22
367.925.16.1	42	368.802.92.1	58	369.861.00.1	148	371.700.16.1	28
367.928.16.1	25	368.812.16.1	57	369.929.16.1	57	371.738.16.1	31
367.929.16.1	57	368.841.00.2	47	369.989.16.2	26	371.739.16.1	32
367.932.16.1	35	368.842.00.1	48	370.000.16.0	10	371.742.00.1	62
367.945.16.1	40	368.843.00.2	48	370.015.16.1	12	371.743.26.1	39
367.988.00.1	59	368.850.00.1	56	370.030.16.1	12	371.744.16.1	39
367.989.16.2	26	368.861.00.1	148	370.045.16.1	11	371.745.00.1	39
367.997.16.1	43	368.989.16.2	26	370.050.16.0	10	371.748.00.1	38
368.000.16.0	10	369.000.16.0	10	370.055.16.1	12	371.751.16.1	50
368.045.16.1	11	369.001.16.1	26	370.125.16.1	14	371.775.16.1	27
368.055.16.1	12	369.015.16.1	12	370.135.16.1	14	371.776.16.1	51
368.088.16.1	11	369.030.16.1	12	370.139.16.1	14	371.840.00.1	49
368.120.16.1	14	369.045.16.1	11	370.145.16.1	14	371.841.00.1	49
368.125.16.1	14	369.055.16.1	12	370.146.16.1	14	371.861.00.1	150
368.130.16.1	14	369.088.16.1	11	370.180.16.1	16	371.862.00.1	151
368.135.16.1	14	369.125.16.1	14	370.185.16.1	16	372.000.16.0	10
368.139.16.1	14	369.130.16.1	14	370.189.16.1	16	372.015.16.1	12
368.162.16.1	16	369.135.16.1	14	370.195.16.1	16	372.030.16.1	12
368.165.16.1	16	369.139.16.1	14	370.196.16.1	16	372.045.16.1	12
368.170.16.1	16	369.145.16.1	14	370.454.16.1	24	372.050.16.0	10
368.175.16.1	16	369.175.16.1	16	370.584.16.5	22	372.055.16.1	12
368.180.16.1	16	369.185.16.1	16	370.587.16.5	22	372.135.16.1	14

Art. no.	Page						
372.139.16.1	14	390.005.14.1	102	390.224.14.1	104	390.416.14.1	113
372.145.16.1	14	390.006.14.1	102	390.225.14.1	111	390.417.14.1	114
372.146.16.1	14	390.007.14.1	102	390.227.14.1	112	390.418.14.1	113
372.147.16.1	14	390.008.14.1	114	390.228.14.1	120	390.420.14.1	104
372.148.16.1	14	390.013.14.1	103	390.230.14.1	105	390.421.14.1	104
372.185.16.1	16	390.014.14.1	103	390.231.14.1	105	390.422.14.1	104
372.189.16.1	16	390.016.14.1	113	390.232.14.1	105	390.423.14.1	104
372.195.16.1	16	390.017.14.1	114	390.247.14.1	106	390.424.14.1	104
372.196.16.1	16	390.020.14.1	104	390.248.14.1	106	390.427.14.1	112
372.197.16.1	16	390.021.14.1	104	390.271.14.1	110	390.428.14.1	120
372.198.16.1	16	390.022.14.1	104	390.278.14.1	111	390.432.14.1	105
372.454.16.1	24	390.023.14.1	104	390.279.14.1	110	390.433.14.1	105
372.596.16.1	22	390.024.14.1	104	390.281.14.1	118	390.434.14.1	105
372.598.16.1	22	390.030.14.1	105	390.283.14.1	116	390.448.14.1	106
372.700.16.1	28	390.046.14.1	106	390.284.14.1	116	390.449.14.1	106
372.738.16.1	31	390.080.14.1	118	390.286.14.1	117	390.454.14.1	106
372.739.16.1	32	390.083.14.1	116	390.287.14.1	117	390.456.14.1	108
372.742.00.1	62	390.099.26.1	119	390.289.14.1	117	390.457.14.1	110
372.743.26.1	39	390.104.14.1	102	390.295.14.1	115	390.459.14.1	107
372.744.16.1	39	390.105.14.1	102	390.296.14.1	88	390.462.14.1	109
372.745.00.1	39	390.106.14.1	102	390.299.26.1	119	390.463.14.1	109
372.748.00.1	38	390.107.14.1	102	390.304.14.1	102	390.464.14.1	109
372.751.16.1	50	390.108.14.1	114	390.305.14.1	102	390.466.14.1	107
372.775.16.1	27	390.113.14.1	103	390.306.14.1	102	390.469.14.1	105
372.776.16.1	51	390.114.14.1	103	390.307.14.1	102	390.470.14.1	108
372.840.00.1	49	390.116.14.1	113	390.308.14.1	114	390.471.14.1	110
372.841.00.1	49	390.117.14.1	114	390.313.14.1	103	390.472.14.1	110
372.861.00.1	150	390.118.14.1	113	390.314.14.1	103	390.473.14.1	110
372.862.00.1	151	390.120.14.1	104	390.316.14.1	113	390.474.14.1	110
379.000.16.0	10	390.121.14.1	104	390.317.14.1	114	390.475.14.1	110
379.055.16.1	12	390.122.14.1	104	390.318.14.1	113	390.493.11.1	118
379.108.16.1	14	390.123.14.1	104	390.320.14.1	104	390.495.14.1	115
379.158.16.1	16	390.124.14.1	104	390.321.14.1	104	390.496.14.1	88
379.701.16.1	32	390.128.14.1	120	390.322.14.1	104	390.499.26.1	119
379.740.16.1	34	390.130.14.1	105	390.323.14.1	104	390.503.14.1	112
379.750.16.1	35	390.131.14.1	105	390.324.14.1	104	390.504.14.1	102
379.768.16.3	45	390.147.14.1	106	390.327.14.1	112	390.505.14.1	102
379.772.16.1	40	390.179.14.1	111	390.328.14.1	120	390.506.14.1	102
379.780.16.1	36	390.180.14.1	118	390.331.14.1	105	390.507.14.1	102
379.781.16.1	58	390.183.14.1	116	390.332.14.1	105	390.508.14.1	114
379.782.16.1	63	390.186.14.1	116	390.333.14.1	105	390.513.14.1	103
379.783.00.1	62	390.199.26.1	119	390.347.14.1	106	390.514.14.1	103
379.791.16.1	28	390.203.14.1	114	390.348.14.1	106	390.516.14.1	113
379.812.16.1	57	390.204.14.1	102	390.349.14.1	106	390.517.14.1	114
387.282.00.1	61	390.205.14.1	102	390.372.14.1	110	390.518.14.1	113
388.020.00.1	168	390.206.14.1	102	390.373.14.1	110	390.520.14.1	104
388.021.00.1	169	390.207.14.1	102	390.395.14.1	115	390.521.14.1	104
388.022.00.1	169	390.213.14.1	103	390.396.14.1	88	390.522.14.1	104
388.023.00.1	168	390.214.14.1	103	390.399.26.1	119	390.523.14.1	104
388.032.00.1	170	390.216.14.1	113	390.404.14.1	102	390.524.14.1	104
388.060.00.1	166	390.217.14.1	114	390.405.14.1	102	390.527.14.1	112
388.061.00.1	166	390.218.14.1	113	390.406.14.1	102	390.528.14.1	120
388.123.24.1	167	390.220.14.1	104	390.407.14.1	102	390.531.14.1	105
388.124.28.1	167	390.221.14.1	104	390.408.14.1	114	390.532.14.1	105
388.137.00.1	171	390.222.14.1	104	390.413.14.1	103	390.533.14.1	105
390.004.14.1	102	390.223.14.1	104	390.414.14.1	103	390.534.14.1	105



Art. no.	Page	Art. no.	Page	Art. no.	Page
390.535.14.1	105	390.652.14.1	106	887.371.00.1	63
390.547.14.1	106	390.662.14.1	107	953.761.00.1	65
390.548.14.1	106	390.665.14.1	107		
390.549.14.1	106	390.675.14.1	110		
390.554.14.1	106	390.695.14.1	115		
390.555.14.1	106	390.699.26.1	119		
390.556.14.1	108	390.703.14.1	112		
390.557.14.1	110	390.704.14.1	102		
390.558.14.1	108	390.705.14.1	102		
390.559.14.1	107	390.706.14.1	102		
390.560.14.1	109	390.707.14.1	102		
390.561.14.1	108	390.708.14.1	114		
390.562.14.1	109	390.716.14.1	113		
390.563.14.1	109	390.717.14.1	114		
390.564.14.1	109	390.718.14.1	113		
390.565.14.1	109	390.720.14.1	104		
390.566.14.1	107	390.721.14.1	104		
390.567.14.1	107	390.722.14.1	104		
390.569.14.1	105	390.723.14.1	104		
390.570.14.1	108	390.724.14.1	104		
390.571.14.1	110	390.727.14.1	112		
390.572.14.1	110	390.728.14.1	120		
390.573.14.1	110	390.735.14.1	105		
390.574.14.1	110	390.736.14.1	105		
390.575.14.1	110	390.737.14.1	105		
390.576.14.1	110	390.751.14.1	106		
390.577.14.1	110	390.752.14.1	106		
390.578.14.1	108	390.753.14.1	106		
390.592.11.1	118	390.775.14.1	110		
390.593.11.1	118	390.776.14.1	110		
390.595.14.1	115	390.796.14.1	88		
390.596.14.1	88	390.798.26.1	119		
390.599.26.1	119	390.799.26.1	119		
390.603.14.1	112	690.102.00.1	66		
390.604.14.1	102	690.103.00.1	66		
390.605.14.1	102	853.405.00.1	63		
390.606.14.1	102	853.522.00.1	60		
390.607.14.1	102	853.523.00.1	60		
390.608.14.1	114	853.524.00.1	60		
390.613.14.1	103	853.526.00.1	60		
390.614.14.1	103	853.527.00.1	60		
390.616.14.1	113	853.528.00.1	60		
390.617.14.1	114	853.529.00.1	60		
390.618.14.1	113	853.531.00.1	60		
390.620.14.1	104	853.612.92.1	65		
390.621.14.1	104	853.614.92.1	65		
390.622.14.1	104	853.615.92.1	65		
390.623.14.1	104	853.616.92.1	65		
390.624.14.1	104	853.617.92.1	65		
390.627.14.1	112	853.618.92.1	65		
390.628.14.1	120	853.619.92.1	65		
390.634.14.1	105	853.620.92.1	65		
390.635.14.1	105	853.622.92.1	65		
390.636.14.1	105	853.705.00.1	60		
390.650.14.1	106	853.928.00.1	63		
390.651.14.1	106	853.970.00.1	63		

**Geberit Sales Ltd**

Geberit House  
Edgehill Drive  
Warwick  
CV34 6NH

T 01926 516 800

F 01926 400 101

In Eire +44 (0)1926 516 800

Literature 0800 007 5133  
enquiries@geberit.co.uk

[www.geberit.co.uk](http://www.geberit.co.uk)